


Number of contacts

64, 32

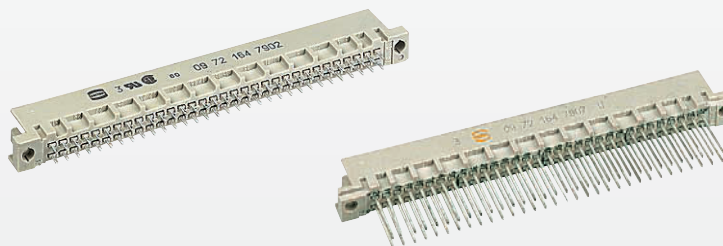

Male connectors

Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to DIN 41 612. Explanation chapter 00												
			3	2	1											
Male connector with solder pins 2.5 mm	64		09 72 164 7902	09 72 164 6902	09 72 164 2902											
	62 + 2▲		09 72 164 7952	09 72 164 6952	09 72 164 2952											
	32		09 72 132 7902	09 72 132 6902	09 72 132 2902											
	32		09 72 132 7912	09 72 132 6912	09 72 132 2912											
Male connector with solder pins 4.0 mm	64		09 72 164 7903	09 72 164 6903	09 72 164 2903											
	62 + 2▲		09 72 164 7953	09 72 164 6953	09 72 164 2953											
	32		09 72 132 7903	09 72 132 6903	09 72 132 2903											
	32		09 72 132 7913	09 72 132 6913	09 72 132 2913											
Male connector with wrap posts 13 mm	64		09 72 164 7907	09 72 164 6907	09 72 164 2907											
	62 + 2▲		09 72 164 7957	09 72 164 6957	09 72 164 2957											
	32		09 72 132 7907	09 72 132 6907	09 72 132 2907											
	32		09 72 132 7917	09 72 132 6917	09 72 132 2917											
Male connector with press-in pins	Part Nos. and variants see chapter 04															
Dimensions	<table><tr><td>a</td><td>b</td></tr><tr><td>2.5</td><td>ø 0.7</td></tr><tr><td>4</td><td></td></tr></table>Solder pins<table><tr><td>a</td><td>b</td></tr><tr><td>13</td><td>□ 0.6</td></tr></table>Wrap posts						a	b	2.5	ø 0.7	4		a	b	13	□ 0.6
a	b															
2.5	ø 0.7															
4																
a	b															
13	□ 0.6															
Panel cut out	Board drillings															
Board drillings	Contact arrangement View from termination side 643232															
	Dimensions in mm															

Male connectors with 2 leading contacts [(0.8 mm) pos. a1 and a32]
Other contact arrangements on request