

Nominal diameter	Withdraw. force	Rated current	Contact resistance
4 mm	-	24 A	0.2 mΩ


Highly flexible patch cord with 4 mm (.160 in) dia. MC®-Multilam™ plugs with 4 mm (.160 in) dia. in-line socket.

Plugs machined brass, gold plated and spring-loaded with MC®-Multilam™. PVC insulated wire 1.5 mm² (15 AWG).

Components and ratings:

- Multilam™ plug LS 410 # 22.1010
- Insulator (polyamide) KT 415 # 22.2150
- Wire HK 1.5 PVC # 22.0030
- Operating temperature -10°C to +70°C (14°F to 158°F)

Colors: • PVC: 0 - 9

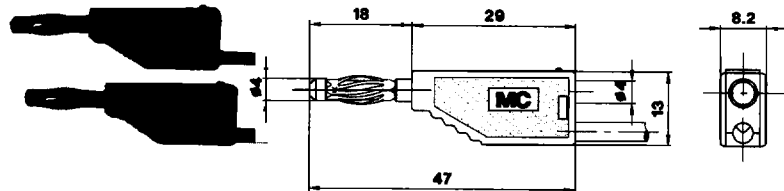



LK 415

21.1900
(25 cm)21.1910
(50 cm)21.1920
(75 cm)21.1930
(100 cm)21.1940
(150 cm)21.1950
(200 cm)

1:1.3

LS 410

KT 415



1:1

Nominal diameter	Withdraw. force	Rated current	Contact resistance
4 mm	-	19 A	0.2 mΩ

Highly flexible patch cord with 4 mm (.160 in) dia. MC®-Multilam™ plugs with 4 mm (.160 in) dia. in-line socket, wire outlet 90°. Plugs machined brass, gold plated and spring-loaded with gold plated MC®-Multilam™.

PVC or silicone insulated wire 1 mm² (17 AWG).

For operating temperatures, see page 27.


Components for LK 410-D 90:

- Multilam™ plug LS 425 # 22.1000
- Insulator (polyamide) KT 410-D 90 # 22.2220
- Wire HK 1 PVC # 22.0020

Components for LK 410-D 90 Sil:

- Multilam™ plug LS 425 # 22.1000
- Insulator (polyamide) KT 410-D 90 # 22.2220
- Wire HK 1 Sil # 22.0100



Colors: • PVC: 0 -9 • Sil: 1, 2, 4, 5, 6

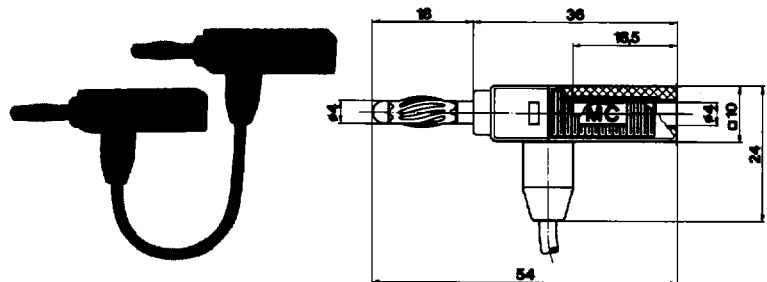LK 410-D 90
LK 410-D 90 Sil21.3100
(Sil) 21.4400
(25 cm)21.3110
(Sil) 21.4410
(50 cm)21.3120
(Sil) 21.4420
(75 cm)21.3130
(Sil) 21.4430
(100 cm)21.3140
(Sil) 21.4440
(150 cm)21.3150
(Sil) 21.4450
(200 cm)

1:1.3

LS 425

KT 410-D-90



1:1

Part No.	Type	Nominal diameter	Withdraw. force	Rated current	Contact resistance
----------	------	------------------	-----------------	---------------	--------------------

21.3300
21.4600 (Sil)
(25 cm)

LK 425-D 90
LK 425-D 90 Sil


21.3310
21.4610 (Sil)
(50 cm)

21.3320
21.4620 (Sil)
(75 cm)

21.3330
21.4630 (Sil)
(100 cm)

21.3340
21.4640 (Sil)
(150 cm)



21.3350
21.4650 (Sil)
(200 cm)

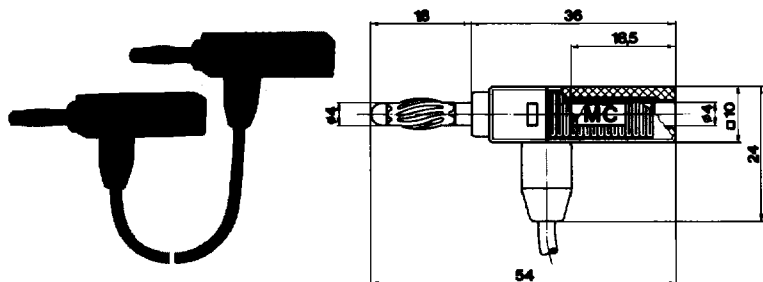

1:1.3

LS 425

KT 425-D90



1:1

4 mm - 32 A 0.2 mΩ

Highly flexible patch cord with 4 mm (.160 in) dia. MC[®]-Multilam[™] plugs with 4 mm (.160 in) dia. in-line socket, wire outlet 90°. Plugs machined brass, gold plated and spring-loaded with MC[®]-Multilam[™]. PVC or silicone insulated wire 1 mm² (17 AWG).

For operating temperatures, see page 27.

Components for LK 425-D 90:

- Multilam[™] plug LS 425 # 22.1000
- Insulator (polyamide) KT 425-D 90 # 22.2240
- Wire HK 2.5-A PVC # 22.0020

Components for LK 425-D 90 Sil:

- Multilam[™] plug LS 425 # 22.1000
- Insulator (polyamide) KT 425-D 90 # 22.2240
- Wire HK 2.5 Sil # 22.0800

Colors: • PVC: 0 -9 • Sil: 1, 2, 4, 5, 6

21.2200
21.4000 (Sil)
(25 cm)

LK 410-B
LK 410-B Sil


21.2210
21.4010 (Sil)
(50 cm)

21.2220
21.4020 (Sil)
(75 cm)

21.2230
21.4030 (Sil)
(100 cm)

21.2240
21.4040 (Sil)
(150 cm)


21.2250
21.4050 (Sil)
(200 cm)

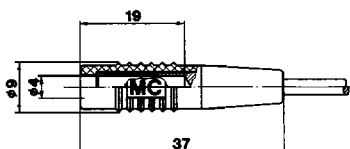

1:1.3

LS 410-B

KT 410-L



1:1

4 mm - 19 A -

Highly flexible patch cord with 4 mm (.160 in) dia. sockets. Sockets machined brass, gold plated. PVC or silicone insulated wire 1 mm² (17 AWG).

For operating temperatures, see page 27.

Components for LK 410-B:

- Socket LS 410-B # 22.1012
- Insulator (polyamide) KT 410-L # 22.2170
- Wire HK 1 PVC # 22.0020

Components for LK 410-B Sil:

- Socket LS 410-B # 22.1012
- Insulator (polyamide) KT 410-L # 22.2170
- Wire HK 1 Sil # 22.0100

Colors: • PVC: 0 -9 • Sil: 1, 2, 4, 5, 6, 9

0 - green/yellow 1 - red 2 - blue 3 - white 4 - black 5 - yellow 6 - green 7 - brown 8 - grey 9 - violet