





Nominal diameter	Withdraw. force	Rated current	Contact resistance		Type	Part No
1 mm	—	6 A	1 mΩ		AK 1-B/1-S	28.0008-00: (7.5 cm)
Highly flexible patch cord with 1 mm (.040 in) dia. spring-loaded socket and 1 mm (.040 in) dia. pin. Matching all spring-loaded 1mm (.040 in) sockets, jacks and pins.						
Pin: machined brass, gold plated.				28.0008-01: (15 cm)		
Socket: machined brass, gold plated and spring-loaded with gold plated MC®-Multilam™.						
PVC insulated wire 0.25 mm² (23 AWG).				28.0008-03: (30 cm)		
						
Components and ratings:				1.5:1		
• Socket LS 1-B # 22.1008						
• Pin LS 1-S # 22.1007						
• Insulator (polyamide) KT 1-S # 22.2070						
• Wire Flexi-E/HK 0.25 # 60.7013						
• Operating temperature: - 10°C to + 70°C (14°F to 158°F)						

Colors: 21 - 29

LS 1-B




LS 1-S



KT 1-S



2:1

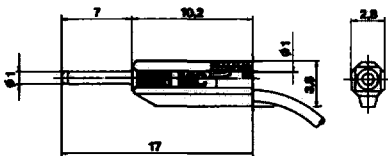
1 mm	—	3 A	1 mΩ		LK 1-A	28.0026-00: (7.5 cm)
Highly flexible patch cord with 1 mm (.040 in) dia. pins with 1 mm (.040 in) dia. spring-loaded in-line socket.						
Pin-socket: machined brass, gold plated.				28.0026-01: (15 cm)		
Socket: spring-loaded with gold plated MC®-Multilam™.						
PVC insulated wire 0.127 mm² (26 AWG).				28.0026-03: (30 cm)		
Components and ratings:				1.5:1		
• Pin-Socket LS 1-A # 22.1019						
• Insulator (polyamide) KT 1-A # 22.2040						
• Wire HK 0.127 PVC # 22.0060						
• Operating temperature: -10°C to+ 70°C (14°F to 158°F)						

Colors: 21 - 29

LS 1-A



KT 1-A



2:1

20 - green/yellow 21 - black 22 - red 23 - blue 24 - yellow 25 - green 26 - violet 27 - brown 28 - gray 29 - white 33 - transparent


Part No.	Type	Nominal diameter	Withdraw. force	Rated current	Contact resistance
----------	------	------------------	-----------------	---------------	--------------------

18.0028-007 LK 1-S
(7.5 cm)

18.0028-015
(15 cm)

18.0028-030
(30 cm)

18.0028-045
(45 cm)

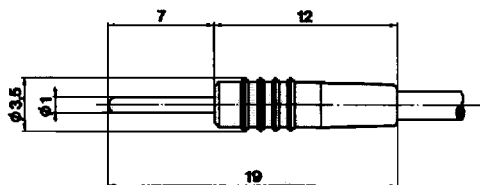


1 mm – 6 A –

Highly flexible patch cord with 1 mm (.040 in) dia. pins. Matching all spring-loaded 1 mm (.040 in) dia. sockets and jacks.
Pin: machined brass, gold plated.
PVC insulated wire 0.25 mm² (23 AWG).

2:1

LS 1-S



KT 1-S



Components and ratings:

- Pin LS 1-S # 22.1007
- Insulator (polyamide) KT 1-S # 22.2070
- Wire Flexi-E/HK 0.25 # 60.7013
- Operating temperature (wire): -10°C to +70°C (14°F to 158°F)
- Operating temperature (insulator) -40°C to +80°C (+40° to +176°F)

2:1



Colors: 21 - 29

18.0027-007 LK 1-B
(7.5 cm)

18.0027-015
(15 cm)

18.0027-030
(30 cm)

18.0027-045
(45 cm)

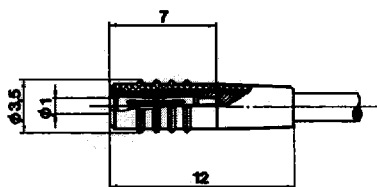


1 mm – 6 A 1 mΩ

Highly flexible patch cord with 1 mm (.040 in) dia. spring-loaded sockets.
Matching pins 1mm (.040 in) dia.
Socket: machined brass, gold plated and spring-loaded with gold plated MC®-Multilam™.
PVC insulated wire 0.25 mm² (23 AWG).

2:1

LS 1-B



KT 1-S



Components and ratings:

- Socket LS 1-B # 22.1008
- Insulator (polyamide) KT 1-S # 22.2070
- Wire Flexi-E/HK 0.25 # 60.7013
- Operating temperature (wire): -10°C to +70°C (14°F to 158°F)
- Operating temperature (insulator) -10°C to +80°C (+40° to +176°F)

1.5:1

Colors: 21 - 29

20 - green/yellow 21 - black 22 - red 23 - blue 24 - yellow 25 - green 26 - violet 27 - brown 28 - gray 29 - white 33 - transparent