


Tous droits réservés. Reproduction ou utilisation sans autorisation écrite de FCI Business S.A. est formellement interdite.

All rights reserved. Reproduction or use in third parties is any form of unauthorized use is strictly prohibited without written authority from the proprietor.

Copyright © FCI Business S.A.

PRODUCT NUMBER	DIM "A"	TOL "T"
89838-203	0300	10
89838-204	0400	20
89838-205	0500	20
89838-206	0600	20
89838-208	0800	20
89838-210	1000	20
89838-215	1500	20
89838-220	2000	20
89838-225	2500	30
89838-230	3000	30
89838-235	3500	30
89838-240	4000	30
89838-245	4500	50
89838-250	5000	50
89838-255	5500	50
89838-260	6000	50
89838-265	6500	50
89838-285	8500	50
89838-2105	10500	100

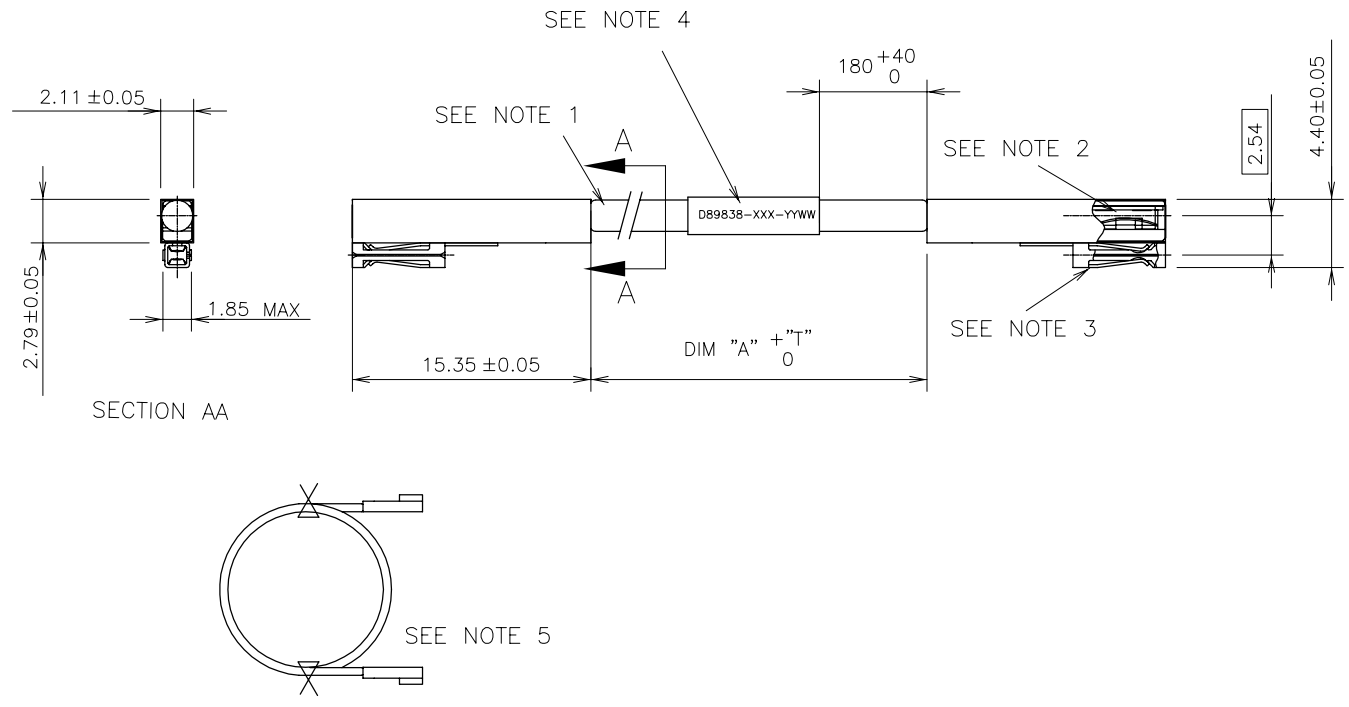

- NOTES:
- CABLE 75 OHMS 89844-20S
 - Mini-PV CTW 0.75mm/30mm (CONTACT AREA) SPRING THICKNESS B FIRST CONTACT POINT, WITH MAXIMUM INSERTION FORCE, OCCURS AT 2.1 mm AVERAGE.
 - DUBOX 0.75 mm/30mm (CONTACT AREA) FIRST CONTACT POINT, WITH MAXIMUM INSERTION FORCE, OCCURS AT 1.7 mm AVERAGE.
 - MARKING : D 89838-2XX-YYWW
WEEK NUMBER
LAST FIGURE OF YEAR
PRODUCT DASH NUMBER
- FOR DASH-NUMBER -2XXX MARKING D89838-2XXXXYYWW
5. ROLLED UP WITHIN Ø100 ± 20 mm.

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI ELECTRONICS	
ltr	ecn no	dr	date	linear		projection		title	MCA 75 OHMS
H	F70197	PNZ	97.04.18						
				angles		mm	scale	product family	MCA
				dr	JL CORDIER	91.03.12	size	dwg no	213
				engr	B LIBREGTS	94.05.20			
				chr	F MORENO	91.03.12	3:1	A3	89838
				app	M. ME	91.03.12			
sheet index	revision sheet	H	1						