

RED INDICATES ORIGINAL


DATA CONTAINED IN THIS DOCUMENT IS
PROPRIETARY TO TROMPETER ELECTRONICS, INC.
AND SHALL NOT BE DISCLOSED, COPIED OR USED
FOR REPRODUCTION OR MANUFACTURE WITHOUT
EXPRESS WRITTEN PERMISSION.

REVISONS			3-0229	SH 1
REV	ED	DESCRIPTION	OWN	APPROVED
L	12391	ADDED -224 AND -225; SEE ECD	DBN	MM; FC 9/17/88

DASH NO	CABLES ACCOMMODATED	A DIM	B HEX	ASSEMBLE PER
-201	M17/178-00002	1.164	.255	TAI-143
-202	TWC-78-1			
-203	TWC-124-1A			
-204	10602, RAYCHEM			
-205	TWAC-78-1F2			
-206	782600130, RAYCHEM	1.289	.344	TAI-167
-207	83310 BELDEN			
-208	202-3927 MICRODOT			
-209	202-3942 MICRODOT	1.164	.255	TAI-143
-210	8451 BELDEN			
-211	202-3934 MICRODOT	1.289	.344	TAI-144
-212	2524E0114, RAYCHEM			
-213	TWC-78-2			
-214	TWC-124-2			
-215	BL-982 TIMES	1.164	.255	TAI-143
-216	BL-1242 TIMES			
-217	GC875TM24H, GRUMMAN			
-218	EPD 22188B, RAYCHEM			
-219	2526D1114, RAYCHEM			
-220	GC875RR1, GRUMMAN	1.289	.344	TAI-144
-221	10614, RAYCHEM			
-222	10613, RAYCHEM			
-223	HMS2-1149, HUGHES			
-224	TWCP-124-3	1.289	.344	TAI-144
-225	PS665PL, PRIME STOCK			

DASH NO	CABLES ACCOMMODATED	A DIM	B HEX	ASSEMBLE PER
-301	GC875GC1, GRUMMAN	1.164	.255	TAI-157
-302	GC875GB1, GRUMMAN			
-303	5022E5111, RAYCHEM			
-304	7528A5314, RAYCHEM	1.289	.344	TAI-173
-305	M17/177-00001/295-3804 MICRODOT			
-306	TRC-50-2			
-307	M17/134-00002			
-308	TRC-75-1	1.164	.255	TAI-188
-309	TRC-75-2			TAI-173
-309	TRC-50-1			TAI-157

INCH	MM
.005	0.13
.030	0.76
.116	2.95
.255	6.48
.257	6.53
.260	6.60
.344	8.74
.567	14.40
.572	14.53
.580	14.73
.688	17.48
.775	19.69
1.00	25.40
1.164	29.57
1.25	31.75
1.289	32.74
1.75	44.45

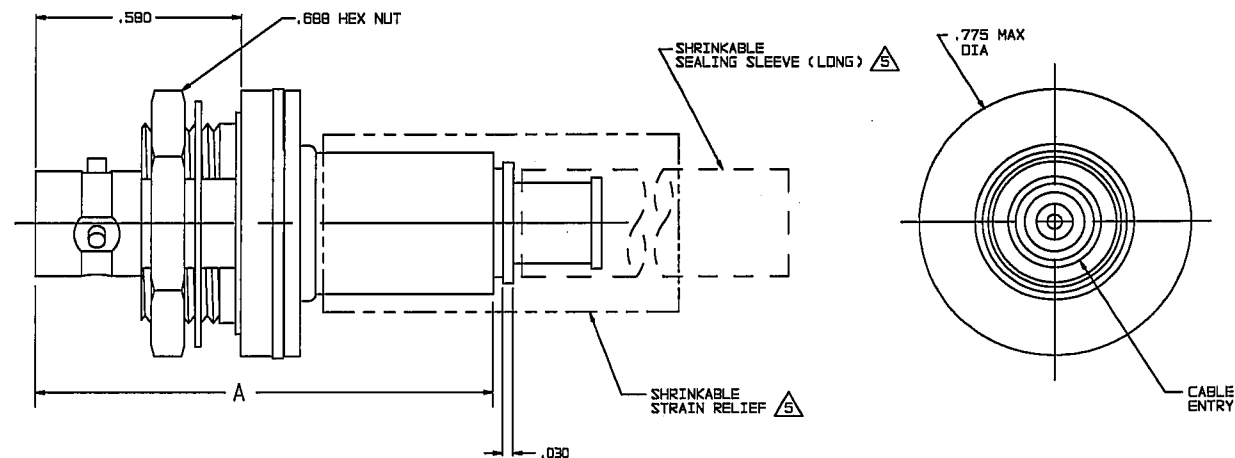

1 SHRINKABLE STRAIN RELIEF AND/OR SHRINKABLE SEALING SLEEVE SUPPLIED LOOSE AS FOLLOWS:

a. CABLE GROUPS -207, -210 & -307:

1 SHRINKABLE STRAIN RELIEF (1.00 LONG)
1 SHRINKABLE SEALING SLEEVE (1.25 LONG)

b. CABLE GROUPS -201 THROUGH -206, -208, -209, -217 THROUGH -223, -301, -302, -303 & -309

1 SHRINKABLE SEALING SLEEVE (1.25 LONG)

c. CABLE GROUPS -211 THROUGH -216, -224, 225, -305, -306, AND -308

1 SHRINKABLE STRAIN RELIEF (1.75 LONG)

4. MAX PANEL THK .116

3. 3-LUG SUBMINIATURE CONCENTRIC
TWINAX (4 PIECE ASSY) AND TRIAX (6 PIECE
ASSY) FULL CRIMP INSULATED BULKHEAD MOUNT RECEPTACLE

2. FINISH: TFS-1A (NICKEL)

1. ALL DIMENSIONS ARE IN INCHES

7. EXAMPLE OF COMPLETE MODEL NO:



BJ154AC-201

BASIC MODEL NO. CABLE GROUP
DASH NO

6. EXAMPLE OF COMPLETE PART NO:

3-0229-201

BASIC PART NO. CABLE GROUP
DASH NO



QTY	DESCRIPTION	PART NUMBER	ITEM
TOL. UNLESS SPECIFIED .XX ±.03 .XXX ±.005 .XXXX ±.0001 ANGLES	TROMPETER ELECTRONICS, INC.	BJ154AC	
OWN DBN 3/21/88	MATERIAL	CODE IDENT	DRAWING NO.
CHK WM 3-31-88		14949	3-0229
ENGR	SCALE 4/1	DATE 5-31-85	SHEET 1 OF 2
APPR	SCALE 4/1	DATE 5-31-85	SHEET 1 OF 2