


PLATING SPECIFICATION
-G: GOLD -SPECIFY -G IN TERMINAL SUFFIX -X
-T: TIN -SPECIFY -T IN TERMINAL SUFFIX -X
-F: FLASH GOLD -SPECIFY -F IN TERMINAL SUFFIX -X
-H: HEAVY GOLD-SPECIFY -H IN TERMINAL SUFFIX -X
(SEE TABLE 1)



1. MIN. PUSHOUT FORCE: 2 lbs.
2. MAX. ALLOWABLE BOW AFTER ASSEMBLY: .003 [.08] in./in.
3. MAX. VARIATION BETWEEN ANY TWO PINS TO BE .010 [.25] MAX.
4. (C) REPRESENTS A CRITICAL DIMENSION.
5. MAX CUT FLASH: .005 [.13]

TABLE 1				
STYLE	"B"	"C"	TERMINAL	COMMENTS
A	.210 [5.33]	.125 [3.18]	T-1M7-01-X	FOR USE WITH STANDARD "SS" SOCKET STRIP
B	.335 [8.51]	.125 [3.18]	T-1M7-02-X	
C	.585 [14.86]	.125 [3.18]	T-1M7-03-X	
D	.835 [21.21]	.125 [3.18]	T-1M7-04-X	

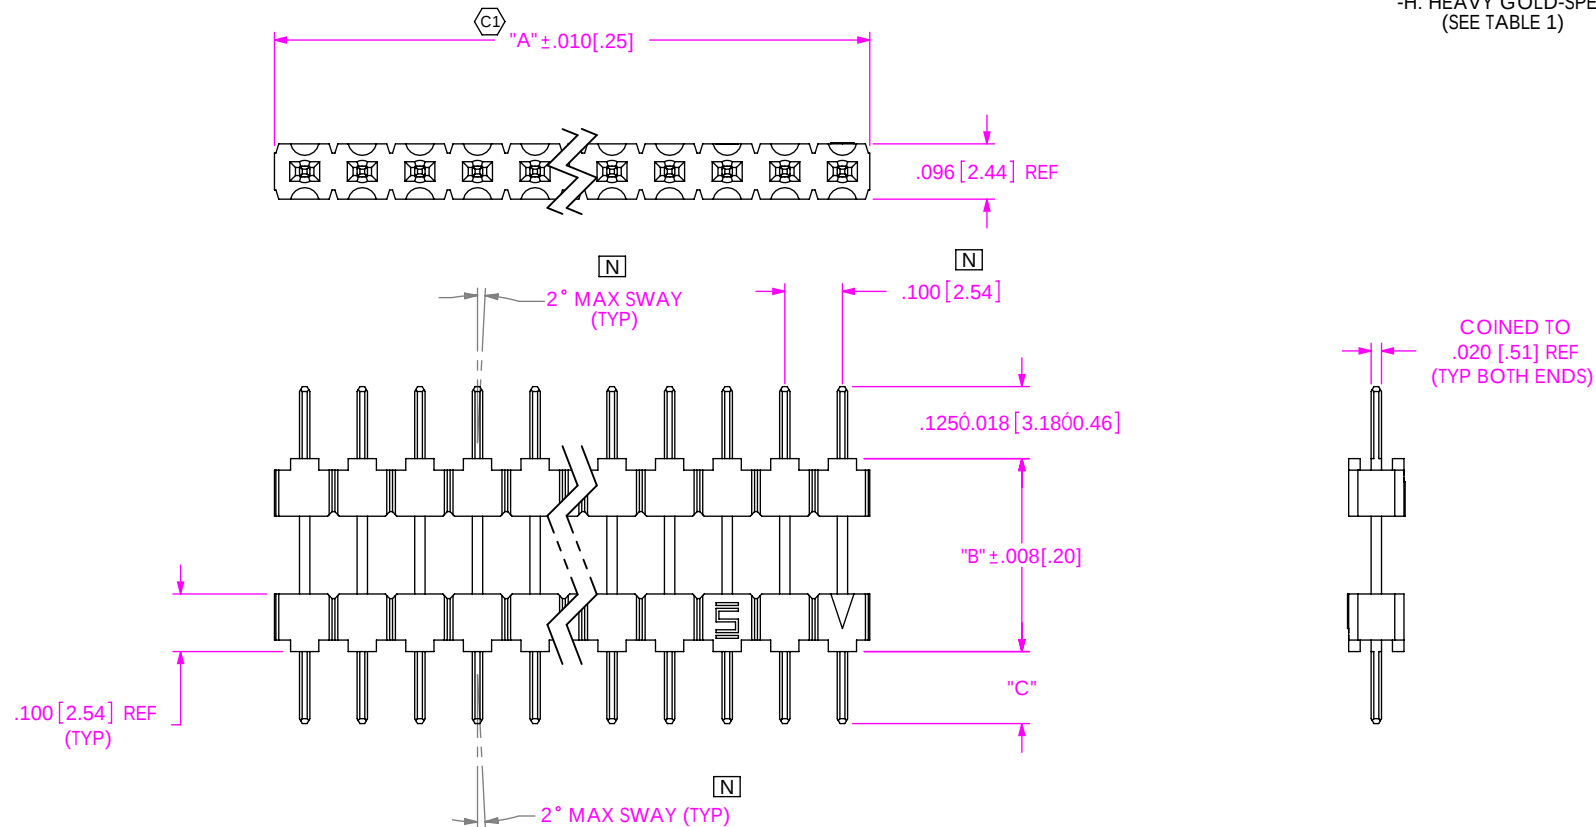

SHEET 1 OF 1