

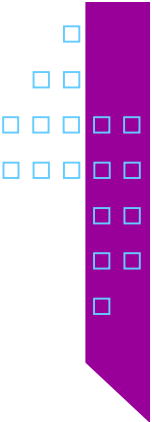


CELL BAND - PACKAGED DROP-IN ISOLATOR - 921-960MHz

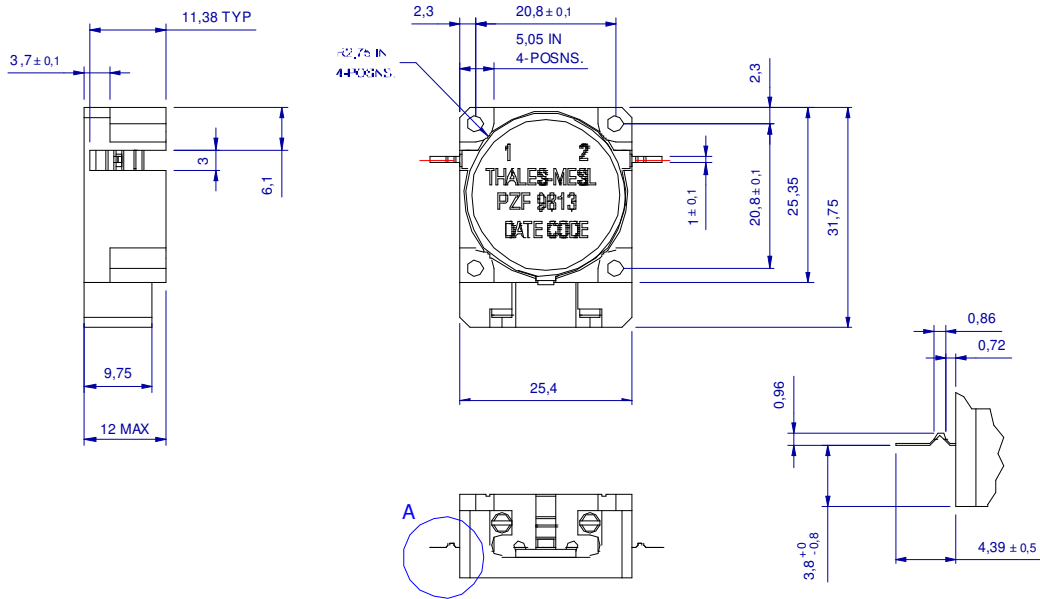

PZF 9813

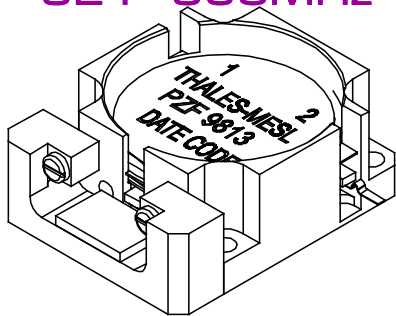

SPECIFICATION	PZF 9813
Frequency	921 - 960 MHz
Power Handling Forward Reverse	100 Watt cw 50 Watt cw
Operating Temperature range	- 25 to +100 deg C
Return Loss	20dB min
Isolation	20dB min
Insertion Loss	0.25dB max
IMD	-79dBc Max

Thales-MESL Ltd
Lochend Industrial Estate, Newbridge, Edinburgh, Scotland, EH28 8LP
Tel: +44 (0)131 333 2000
Fax: +44 (0)131 333 3607
Email: sales@thales-mesl.com
Web: www.thales-mesl.com

This publication is issued for outline information purposes only. Thales Mesl Ltd reserves full rights to amend the specification.

THALES