


euro-block

product specification

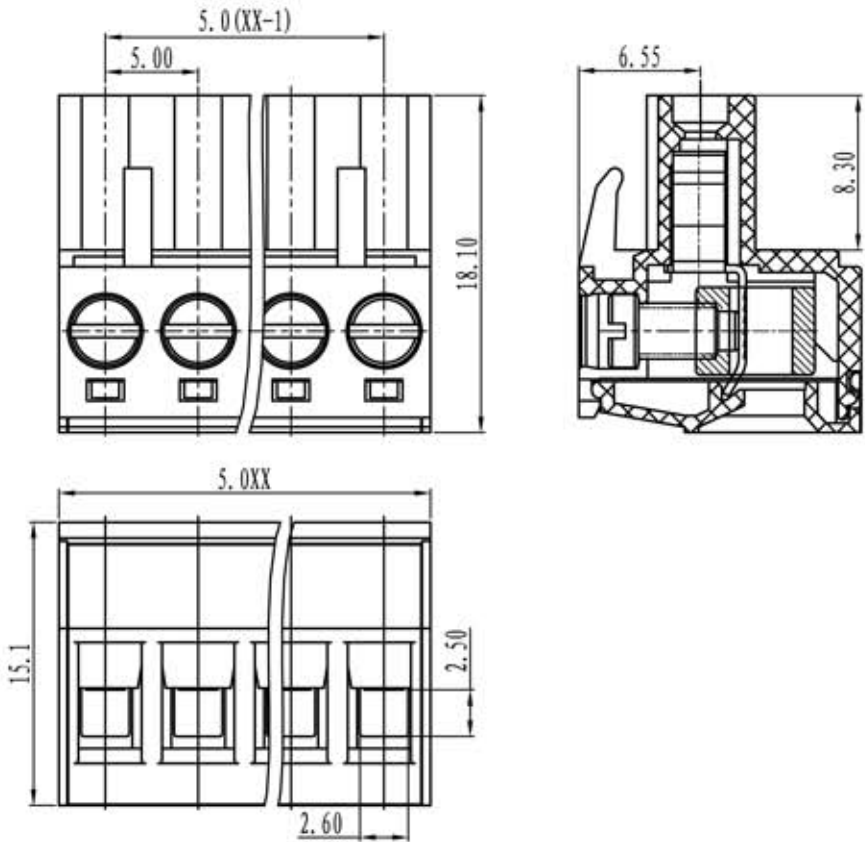

Electrical

Standard: UL-IEC
 Rated voltage: 300V-320V
 Rated current: 20A-24A
 Contact resistance: 20m Ω
 Wire range: 22-12AWG 2.5mm²
 Insulation resistance: 500M Ω/DC500V
 Withstanding voltage: AC2000V/1Min

Mechanical

Temp.Range: -40°C~+105°C
 Torque: 0.5Nm (4.5Lb'in)
 Strip length: 7-8mm

Dimensions

Pitch: 5.00mm
 Poles: 2p-24p

Material

Housing: PA66, UL94V-0
 Screws: M3.0, steel Zinc plated
 Wire guard: Brass, Ni plated
 Clamp: Phosphor bronze, Ni plated

Schema generale del codice di ordinazione / General description of ordering code

serie	n°poli	passo	versione	colore	custom
SFC	04	5			

TOLERANCES EXCEPT AS NOTED

variable range	linear dimension					fillet	chanfer	short angle sid			≡	-	□	//	⊥		
	to 6	over 6 to 30	over 30 to 120	over 120 to 480	over 480 to	all	to 6	to 10	to 10	to 50						to 120	to 10'
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1'	30'	20'	10'	0.5	0.025	0.06	0.12	0.4

UNITS	mm	SIZE	A4	SCALE	FIRST ANGLE PROJECTION	
euro-block						