




## T48-Type 1300 nm and 1500 nm Uncooled 2.5 Gbits/s Laser Transmitters

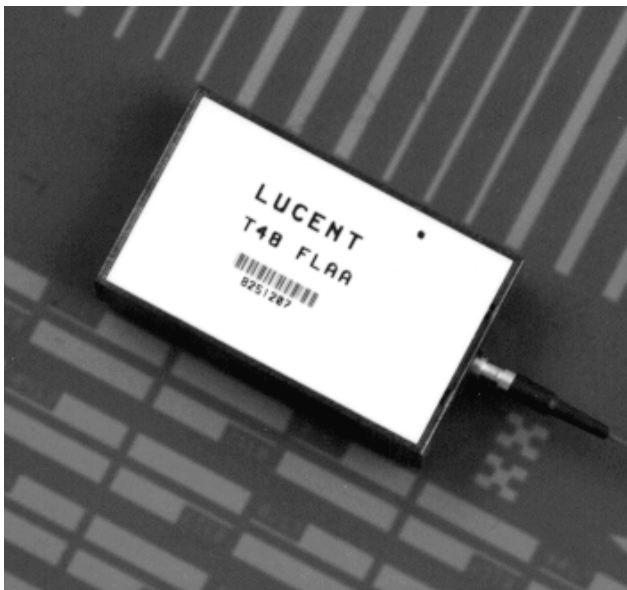

Offering multiple output power options and SONET/SDH compatibility, the T48-Type Uncooled Laser Transmitters are manufactured in a 24-pin plastic DIP with a single-mode fiber pigtail.

### Features

- Multisource compliant
- Data rates to 2.5 Gbits/s
- SONET and ITU-T compliant at OC-48 and STM-16
- Uncooled, field-proven InGaAsP MQW laser
- 1300 nm and 1500 nm versions
- Clocked or nonclocked operation with single-ended or differential inputs
- 50  $\Omega$  ac-coupled ECL or PECL compatible data and clock inputs
- Operation from single +5 V or -5 V power supply
- Low-profile, 24-pin nonconductive package
- Automatic power control
- Wide operating case temperature range, -40 °C to +85 °C

- Laser back-facet monitor output
- Transmitter-disable input
- FC-PC or SC connectors

### Applications

- Telecommunications:
  - SONET/SDH SR/IR/LR
  - Subscriber loop
  - Metropolitan area networks
- High-speed data communication

### Description

The T48-Type 2.5 Gbits/s Laser Transmitters are designed for use in transmission systems and high-speed data communication applications. The transmitter operates at the SONET OC-48 rate, as well as the ITU-T SDH rate of STM-16.

The transmitters meet all present *Telcordia Technologies*\* GR-253CORE requirements and the ITU-T G.957 and G.958 recommendations. They are also ideally suited for extended-distance data and networking applications.

Manufactured in a 24-pin, plastic-encased DIP, the transmitter incorporates an InGaAs PIN photodiode back-facet monitor, a GaAs laser driver IC, and a choice of lasers, including:

- 1300 nm hermetic Fabry-Perot laser (T481 versions)
- 1300 nm hermetic MQW isolated DFB laser (T483 versions)
- 1550 nm hermetic MQW isolated DFB laser (T485 versions)

The transmitter requires a single power supply (+5 V or -5 V). A clock input can be enabled for those applications where jitter is critical.

Pin information is listed in Table 1.

\* *Telcordia Technologies* is a trademark of Bell Communications Research, Inc.

## Transmitter Processing

The transmitter can withstand normal wave soldering processes. The complete transmitter module is not hermetically sealed; therefore, it should not be immersed in or sprayed with any cleaning solution or solvents. The process cap and fiber-pigtail jacket can deform at temperatures greater than 85 °C. The transmitter pins can be wave-soldered at maximum temperature of 250 °C for 10 seconds.

## Installation Considerations

Although the transmitter has been designed with ruggedness in mind, care should be used during handling. The optical connector should be kept free from dust, and the process cap should be kept in place as a dust cover when the device is not connected to a cable. If contamination is present on the optical connector, the use of canned air with an extension tube should remove any debris. Other cleaning procedures are identified in the *Cleaning Fiber-Optic Assemblies* Technical Note (TN95-010LWP).

## Connector Options

The standard fiber-optic pigtail is an 8 μm core single-mode fiber in a 0.036 in. (914 μm) diameter, tight-buffered outer jacket. The standard length is 39 in. ± 4 in. (1 m ± 10 cm) and can be terminated with either an SC or FC/PC optical connector. Other connector options may be available on special order. Please contact your Lucent Technologies Account Manager for ordering information.

Table 1. Pin Descriptions

Pin Number	Name
1	V <sub>EE</sub>
2	BF Monitor *
3	Bias Monitor*
4	Tx Disable
5	Clock Select
6	Ground
7	NUC <sup>†</sup>
8	NUC <sup>†</sup> /Laser Degrade Alarm (future option)
9	NUC <sup>†</sup>
10	NUC <sup>†</sup>
11	Ground
12	V <sub>EE</sub>
13	V <sub>CC</sub>
14	NUC <sup>†</sup>
15	Ground
16	DATA
17	Ground
18	DATA
19	Ground
20	Clock
21	Ground
22	Clock
23	Ground
24	V <sub>CC</sub>

\* Laser back-facet and bias monitor functions are customer-use options that are not required for normal operations of the transmitter. They are normally used during manufacture and for diagnostics.

† Pins designated no user connection (NUC) cannot be tied to ground or any other circuit potential.

## Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operations sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

Parameter	Symbol	Min	Max	Unit
Supply Voltage*	—	—	5.5	V
Operating Case Temperature Range	T <sub>C</sub>	-40	85	°C
Storage Case Temperature Range	T <sub>stg</sub>	-40	85	°C
Lead Soldering Temperature/Time	—	—	250/10	°C/s
Relative Humidity (noncondensing)	RH	—	85	%
Minimum Fiber Bend Radius	—	1.00 (25.4)	—	in. (mm)

\* With V<sub>EE</sub> connected to -5 V, V<sub>CC</sub> must be at 0 V; with V<sub>CC</sub> connected to +5 V, V<sub>EE</sub> must be at 0 V.

## Characteristics

Minimum and maximum values specified over operating case temperature range at 50% duty cycle data signal. Typical values are measured at room temperature unless otherwise noted.

**Table 2. Electrical Characteristics**

Parameter	Symbol	Min	Typ	Max	Unit
dc Power Supply Voltage <sup>1</sup>	V	4.75	5.0	5.25	V
dc Power Supply Current Drain	I	—	180	300	mA
Input Data/Clock Voltage: <sup>2, 3</sup>					
Single-ended Input	V <sub>IN</sub>	600	800	1000	mVp-p
Differential Input	V <sub>IN</sub>	300	400	500	mVp-p
Clocked/Nonclocked Select Voltage: <sup>4</sup>					
Clocked Operation (active-low)	V <sub>SEL_CLK</sub>	V <sub>EE</sub>	—	V <sub>EE</sub> + 0.8	V
Nonclocked Operation	V <sub>SEL_CLK</sub>	V <sub>CC</sub> - 2.0	—	V <sub>CC</sub>	V
Input Impedance	R <sub>IN</sub>	—	50	—	Ω
Transmitter Disable Voltage <sup>5</sup>	V <sub>DIS</sub>	V <sub>CC</sub> - 2.0	—	V <sub>CC</sub>	V
Transmitter Enable Voltage (enabled low)	V <sub>EN</sub>	V <sub>CC</sub> - 2.0	—	V <sub>EE</sub> + 0.8	V
Laser Bias Voltage <sup>6</sup>	V <sub>B</sub>	0	200	1600	mV
Back-facet Monitor Voltage (50% duty cycle)	V <sub>BF</sub>	460	500	540	mV
Set-up Time (See Figure 1.)	t <sub>SET</sub>	—	—	70	ps
Hold Time (See Figure 1.)	t <sub>HOLD</sub>	70	—	—	ps

1. With V<sub>EE</sub> connected to -5 V, V<sub>CC</sub> must be at 0 V; with V<sub>CC</sub> connected to +5 V, V<sub>EE</sub> must be at 0 V.

2. Inputs are ac-coupled into an equivalent input impedance of 50 Ω.

3. Single-ended or differential operation may be used. If the inputs are driven single-ended, the unused inputs must be ac-coupled (0.1 μF) to ground.

4. Clocked operation is optional. For clocked operation, pin 5 must be tied to V<sub>EE</sub>. With clocked operation, the optical output changes state with the rising edge of the input clock signal. If left unconnected, the pin will be pulled low, enabling the clock mode.

5. The transmitter is normally enabled and only requires an external voltage to disable.

6. This voltage is measured from pin 3 to V<sub>EE</sub> and is converted to laser bias current with the ratio of 20 mV/mA.

Characteristics (continued)

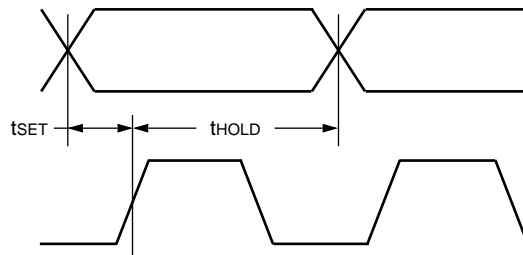


Figure 1. Electrical Input/Output Interface Timing Diagram

1-1087(F)


Table 3. Optical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit
Average Power Output: <sup>1</sup>					
T481xLAA	P <sub>o</sub>	-10	-5	-3	dBm
T483xFAA, T485xFAA	P <sub>o</sub>	-5	-2	0	dBm
T483xDAA, T485xDAA	P <sub>o</sub>	-2	0	2	dBm
Center Wavelength Range:					
T481xLAA	$\lambda$	1266	—	1360	nm
T483xFAA	$\lambda$	1270	—	1360	nm
T483xDAA	$\lambda$	1280	—	1335	nm
T485xFAA	$\lambda$	1430	—	1580	nm
T485xDAA	$\lambda$	1500	—	1580	nm
Spectral Width (T481 Version, F-P Laser)	$\Delta\lambda_{RMS}$	—	—	4	nm
Spectral Width (T483/T485 Versions, DFB Laser) <sup>2</sup>	$\Delta\lambda_{20}$	—	—	1	nm
Wavelength Shift with Temperature:					
T481 Version	$\Delta\lambda/\Delta T$	—	0.4	—	nm/°C
T483/T485 Versions	$\Delta\lambda/\Delta T$	—	0.1	—	nm/°C
Side-mode Suppression Ratio (T483/T485 Version) <sup>3</sup>	SSR	30	—	—	dB
Extinction Ratio <sup>4</sup>	r <sub>e</sub>	8.2	—	—	dB
Eye Mask of Optical Output <sup>5, 6</sup>	—	Meets SONET and ITU-T			

1. Output power definitions and measurement per ITU-T Recommendation G.957 and G.958.
2. Full spectral width measured 20 dB down from the maximum of the central wavelength peak under fully modulated conditions.
3. Ratio of the average output power in the dominant longitudinal mode to the optical power in the most significant side mode under fully modulated conditions.
4. Ratio of logic 1 output power to logic 0 output under fully modulated conditions.
5. GR-253-CORE, *Synchronous Optical Network (SONET) Transport Systems: Common Generic Criteria*.
6. ITU-T Recommendation G.957, *Optical Interfaces for Equipment and Systems Relating to the Synchronous Digital Hierarchy*.

### Outline Drawing

Dimensions are in inches and (millimeters).

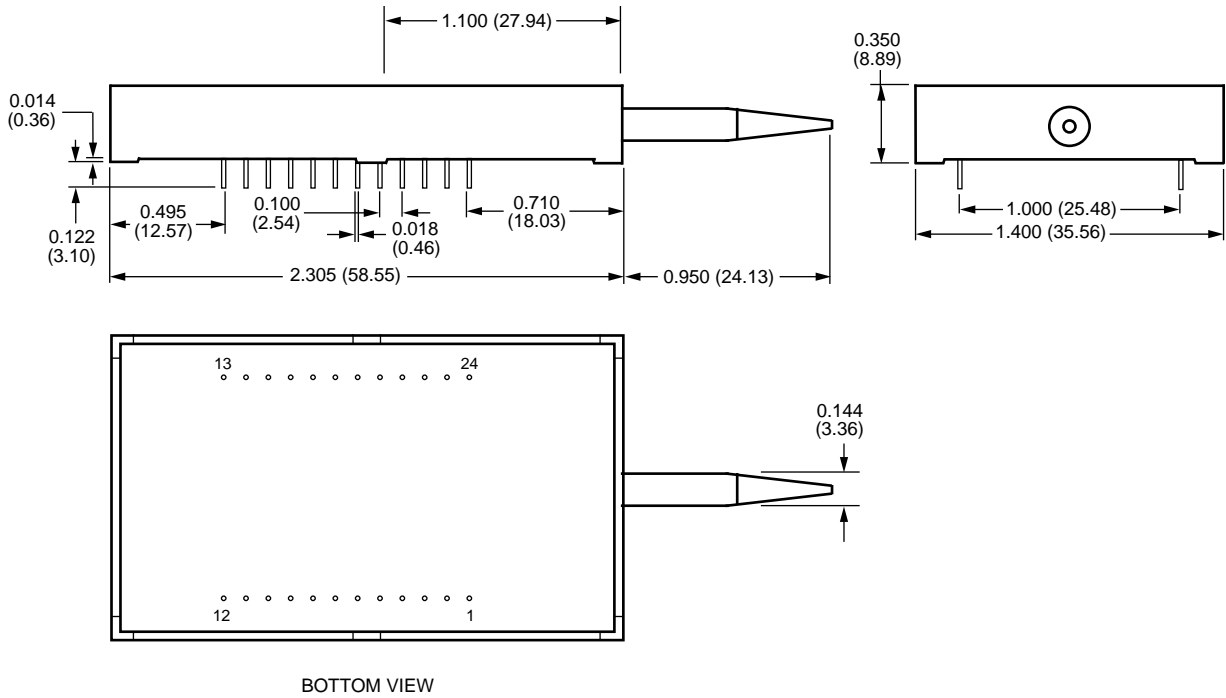

1-999

## Qualification and Reliability

To help ensure high product reliability and customer satisfaction, Lucent is committed to an intensive quality program that starts in the design phase and proceeds through the manufacturing process. Optoelectronics modules are qualified to Lucent internal standards using MIL-STD-883 test methods and procedures and using sampling techniques consistent with *Telcordia Technologies* requirements. This qualification program fully meets the intent of *Telcordia Technologies* reliability practices TR-NWT-000468 and TA-TSY-000983. In addition, the Lucent Technologies Microelectronics Group Optoelectronics design, development, and manufacturing facility has been certified to be in full compliance with the latest *ISO*\* 9001 Quality System Standards.

## Laser Safety Information

### Class I Laser Product

FDA/CDRH Class I laser product. All versions of the T48-Type transmitters are Class I laser products per CDRH, 21 CFR 1040 Laser Safety requirements. The transmitters have been certified with the FDA under accession number 8720009. All versions are Class I laser products per *IEC*† 60825-1:1993.

**CAUTION: Use of controls, adjustments, and procedures other than those specified herein may result in hazardous laser radiation exposure.**

This product complies with 21 CFR 1040.10 and 1040.11.

8.8  $\mu\text{m}$ /125  $\mu\text{m}$  single-mode fiber pigtail with 914  $\mu\text{m}$  tight-buffered outer jacket and connector

Wavelength = 1.3  $\mu\text{m}$ , 1.5  $\mu\text{m}$

Maximum power = 1.6 mW

Because of size constraints, laser safety labeling is shipped with the device.

Product is not shipped with power supply.

#### Notice

**Unterminated optical connectors can emit laser radiation.  
Do not view with optical instruments.**

\* *ISO* is a registered trademark of The International Organization for Standardization.


† *IEC* is a registered trademark of The International Electrotechnical Commission.

## Ordering Information

Product Code	Connector	Comcode
T481CLAA	SC	108309162
T481FLAA	FC/PC	108309170
T483CDAA	SC	108309196
T483CFAA	SC	108309204
T483FDAA	FC/PC	108309212
T483FFAA	FC/PC	108309220
T485CDAA	SC	108400300
T485CFAA	SC	108400987
T485FDAA	FC/PC	108400995
T485FFAA	FC/PC	108401001

## Coding Scheme

Example: T48XXXXX

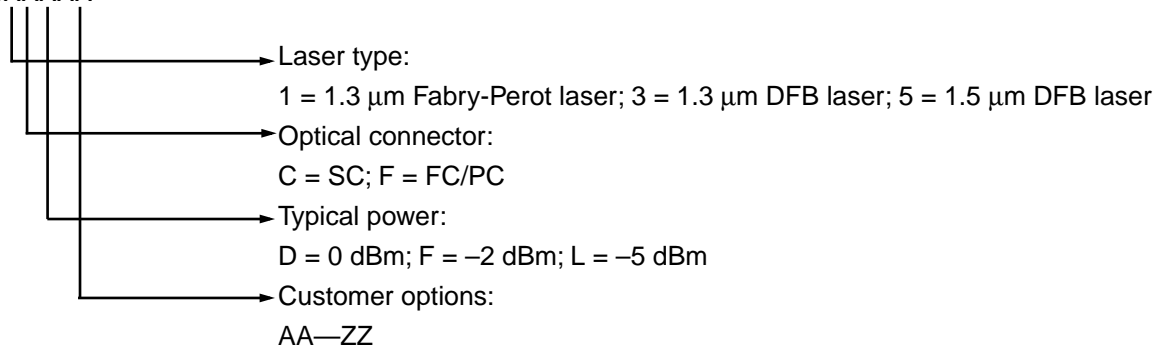

## Related Product Information

Product Code	Description	Document Number
1320-Type Lightwave Receiver	Lightwave Receiver with Clock Recovery and Data Retiming for 2488.32 Mbits/s Applications	DS97-113LWP
1320 2.5 Gbits/s Receiver	Biasing and Interfacing to the 1320 2.5 Gbits/s Receiver	AP98-052LWP
R485-Type Lightwave Receiver	Lightwave Receiver with Clock Recovery and Internal APD Bias Supply	—

---

For additional information, contact your Microelectronics Group Account Manager or the following:

INTERNET: <http://www.lucent.com/micro>, or for Optoelectronics information, <http://www.lucent.com/micro/opto>

E-MAIL: [docmaster@micro.lucent.com](mailto:docmaster@micro.lucent.com)

N. AMERICA: Microelectronics Group, Lucent Technologies Inc., 555 Union Boulevard, Room 30L-15P-BA, Allentown, PA 18103  
**1-800-372-2447**, FAX 610-712-4106 (In CANADA: **1-800-553-2448**, FAX 610-712-4106)

ASIA PACIFIC: Microelectronics Group, Lucent Technologies Singapore Pte. Ltd., 77 Science Park Drive, #03-18 Cintech III, Singapore 118256  
**Tel. (65) 778 8833**, FAX (65) 777 7495

CHINA: Microelectronics Group, Lucent Technologies (China) Co., Ltd., A-F2, 23/F, Zao Fong Universe Building, 1800 Zhong Shan Xi Road, Shanghai 200233 P. R. China **Tel. (86) 21 6440 0468, ext. 316**, FAX (86) 21 6440 0652

JAPAN: Microelectronics Group, Lucent Technologies Japan Ltd., 7-18, Higashi-Gotanda 2-chome, Shinagawa-ku, Tokyo 141, Japan  
**Tel. (81) 3 5421 1600**, FAX (81) 3 5421 1700

EUROPE: Data Requests: MICROELECTRONICS GROUP DATALINE: **Tel. (44) 7000 582 368**, FAX (44) 1189 328 148  
Technical Inquiries: OPTOELECTRONICS MARKETING: **(44) 1344 865 900** (Ascot UK)

---

Lucent Technologies Inc. reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

