

Part No.	Type	Nominal diameter	Withdraw. force	Rated current	Contact resistance
----------	------	------------------	-----------------	---------------	--------------------

21.0100
(7.5 cm)

LK 2-S


2 mm - 10 A -

21.0110
(15 cm)

21.0120
(30 cm)

21.0130
(45 cm)

21.0140
(60 cm)

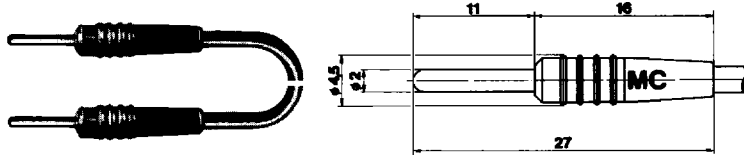

Highly flexible patch cord with 2 mm (.080 in) dia. pins. Matching spring-loaded 2 mm (.080 in) dia. sockets or jacks. Pins machined brass and gold plated. PVC insulated wire 0.5 sq. mm (20 AWG).


Components and ratings:

- Pin LS 2-S # 22.1002
- Insulator (polyamide) KT 2-S # 22.2010
- Wire HK 0.5 PVC # 22.0010
- Operating temperature: -10°C to +70°C (14°F to 158°F)

1:5:1

LS 2-S

KT 2-S



Colors: 0 - 9

1:5:1

21.4800
(7.5 cm)

LK 2-S/A


2 mm - 10 A -

21.4810
(15 cm)

21.4820
(30 cm)

21.4830
(45 cm)

21.4840
(60 cm)

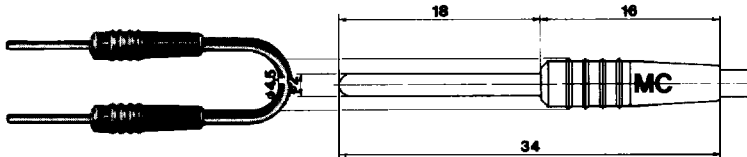

Highly flexible patch cord with 2 mm (.080 in) dia. pins. Matching spring-loaded 2 mm (.080 in) dia. sockets or jacks. Pins machined brass and gold plated. PVC insulated wire 0.5 sq. mm (20 AWG).


Components and ratings:

- Pin LS 2-S/A # 22.5103
- Insulator (polyamide) KT 2-S # 22.2010
- Wire HK 0.5 PVC # 22.0010
- Operating temperature: -10°C to +70°C (14°F to 158°F)

1:5:1

LS 2-S/A

KT 2-S



Colors: 0 - 9

1:5:1

0 - green/yellow 1 - red 2 - blue 3 - white 4 - black 5 - yellow 6 - green 7 - brown 8 - gray 9 - violet