


**QUALITY
TECHNOLOGIES**

OPTOELECTRONICS

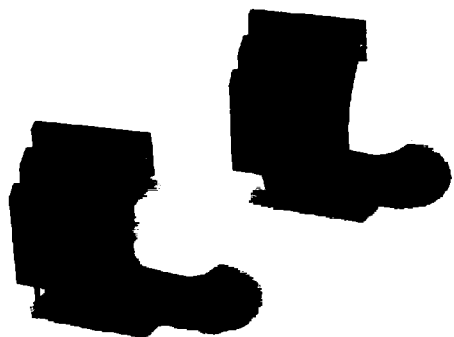

T-1 3/4 (5mm)

PART NO.	COLOR	VF	mcd	mA	DIM A in. (mm)
MV60538.MP6		1.7	2.0	20	0.125 (3.18)
MV63538.MP6	YLW	2.1	18.0	20	0.125 (3.18)
MV64538.MP6	GRN	2.2	26.0	20	0.125 (3.18)
MV67538.MP6	RED	2.1	14.0	20	0.125 (3.18)
MV60539.MP6		1.7	3.2	20	0.180 (4.57)
MV63539.MP6	YLW	2.1	20.0	20	0.180 (4.57)
MV64539.MP6	GRN	2.2	28.0	20	0.180 (4.57)
MV67539.MP6	RED	2.1	15.0	20	0.180 (4.57)

LOW CURRENT (2mA)

HLMP-47009.MP6		1.8	2.0	2	0.180 (4.57)
HLMP-47199.MP6	YLW	1.9	2.0	2	0.180 (4.57)
HLMP-47409.MP6	GRN	1.9	3.0	2	0.180 (4.57)

AlGaAs RED

HLMP-D1019.MP6		1.8	70.0	20	0.180 (4.57)
HLMP-D1509.MP6		1.6	3.0	1	0.180 (4.57)

ULTRA BRIGHT

MV33509.MP6	YLW*	2.2	150.0	20	0.180 (4.57)
MV34509.MP6	GRN*	2.2	150.0	20	0.180 (4.57)
MV37509.MP6		2.2	150.0	20	0.180 (4.57)

INTEGRAL RESISTOR


MR30509.MP6		5.0	2.0	13	0.180 (4.57)
MR30519.MP6		12.0	2.0	13	0.180 (4.57)
MR33509.MP6	YLW	5.0	4.0	10	0.180 (4.57)
MR33519.MP6	YLW	12.0	4.0	13	0.180 (4.57)
MR34509.MP6	GRN	5.0	4.0	12	0.180 (4.57)
MR34519.MP6	GRN	12.0	4.0	13	0.180 (4.57)
MR37509.MP6		5.0	4.0	10	0.180 (4.57)
MR37519.MP6		12.0	4.0	13	0.180 (4.57)

BICOLOR

MV54919.MP6	G	2.3	6.0	20	0.180 (4.57)
-------------	---	-----	-----	----	--------------

All electrical values are typical
*Clear lens

Figure 6

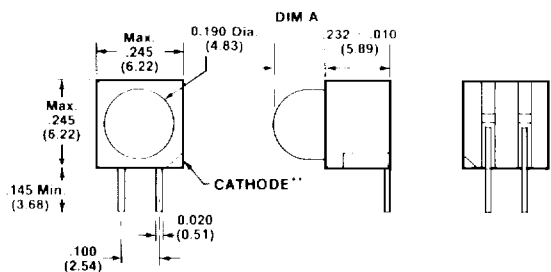

**THE CATHODE, AS INDICATED, IS THE RED CATHODE FOR THE RED/GREEN BICOLOR LED
DECIMALS .015 (0.38)

© QUALITY TECHNOLOGIES, INC. 1998