



HONEYWELL
PART NUMBER

14SX101-T

PRODUCT CODE
VDK3001

REV	DOCUMENT	CHANGED BY	CHECK
8	0060324	VKR 13JAN10	CMH

PLASTIC PLUNGER

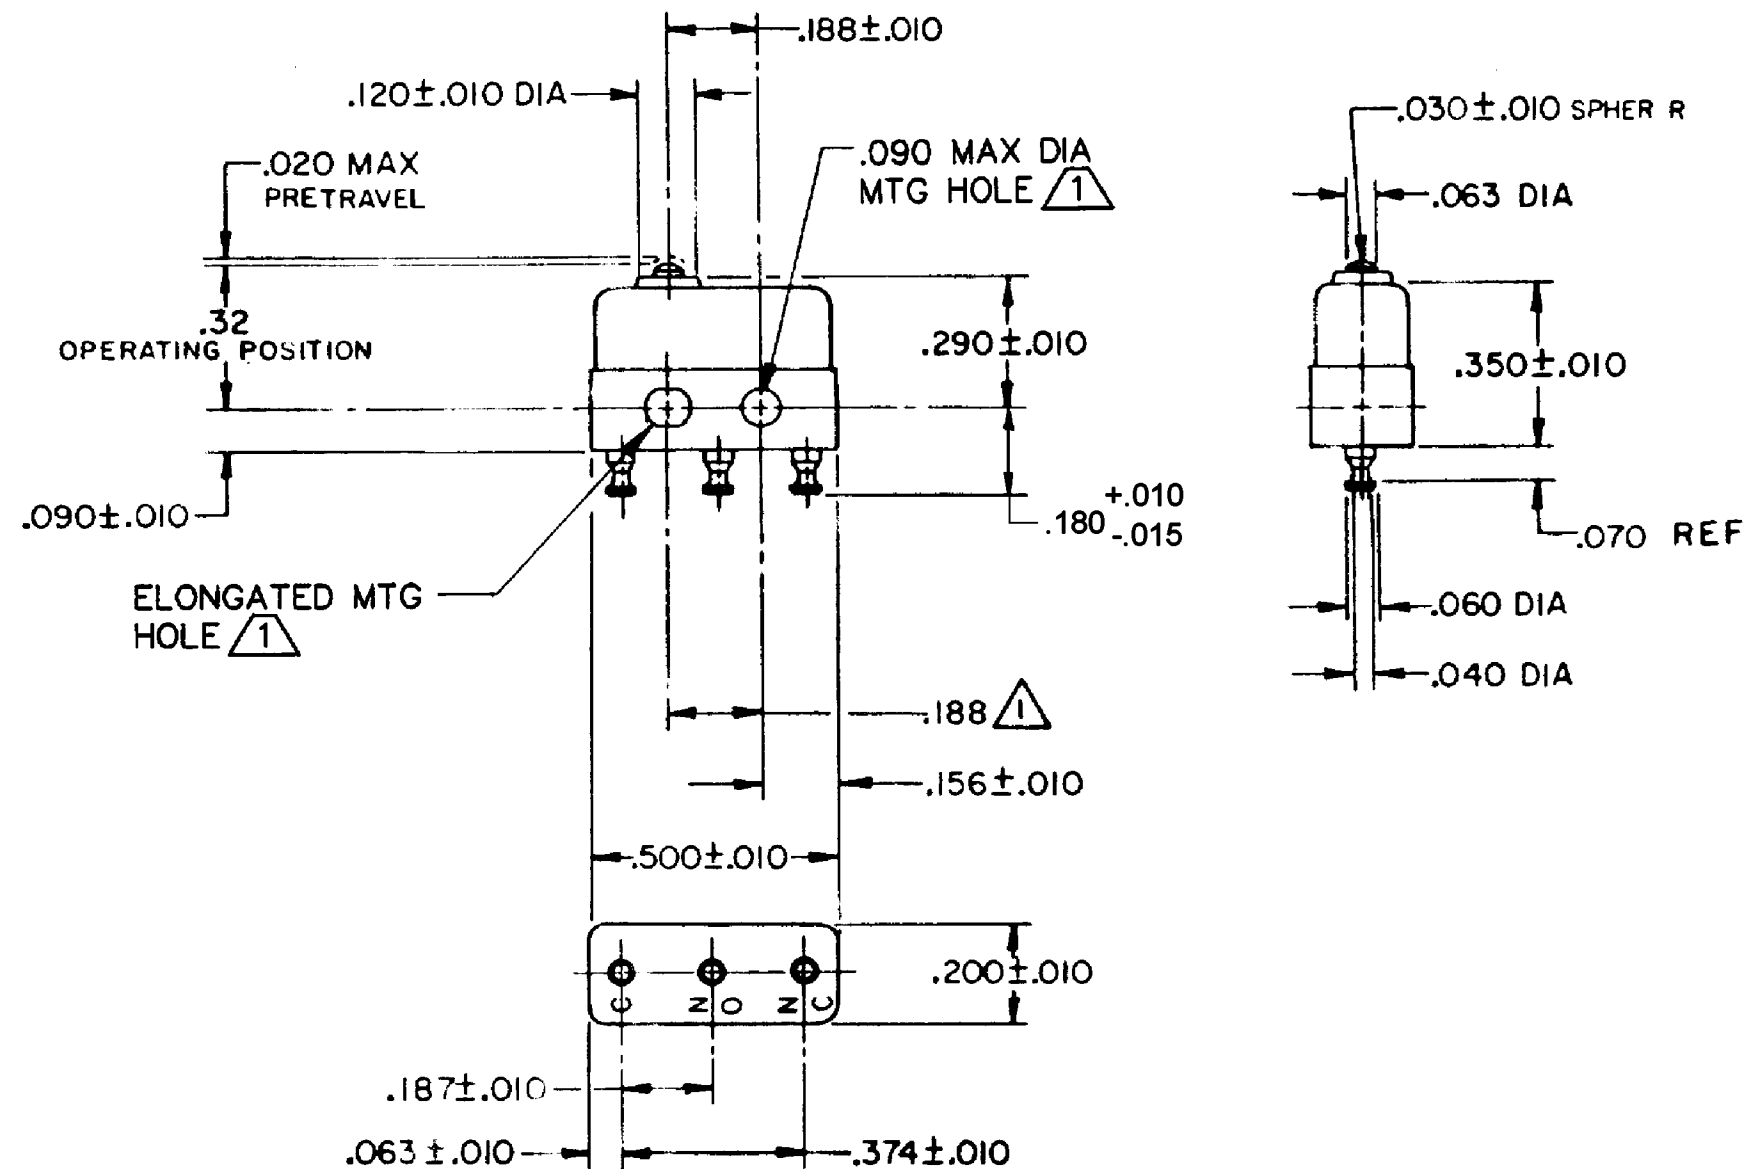

NOTES

- ① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 DIA ON .188 ± .002 CENTERS
- 2 - TERMINALS ARE SOLDER DIPPED WITH RoHS-COMPLIANT TIN/COPPER/SILVER SOLDER.
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 325°F
- 4 - MOVABLE CONTACT MATERIAL - 24K SOLID GOLD
- 5 - STATIONARY CONTACT MATERIAL - GOLD ALLOY

RELEASE NO.
PR-12411REPLACES
X78595-SX

CHARACTERISTICS

OPERATING FORCE - - - 5 OZ MAX

RELEASE FORCE - - - - 1 OZ MIN

DIFFERENTIAL TRAVEL - - - .001 MAX

OVERTRAVEL - - - - - .004 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

30 VOLTS DC RATING

	SEA LEVEL	50,000 FT
INDUCTIVE	0.5 AMP	0.5 AMP
RESISTIVE	1 AMP	1 AMP

MAXIMUM INRUSH 2 AMP

APPROVALS	KEMA, CE	1A 250 V ~ T125 25E3	UL, CSA	1A 125 VAC

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±
ONE PLACE	.X	±
TWO PLACE	.XX	±
THREE PLACE	.XXX	±
FOUR PLACE	.XXXX	±
ANGLES		±

THIRD ANGLE PROJECTION



DRAWN

SPK

20FEB08

CHECK

RJ

20FEB08

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ANSI Y14.5M-1982
OTHER HONEYWELL ENGINEERING
STANDARDS MAY APPLY

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE

TYPE

DRAWING NAME

REV

B**I****14SX101-T****8**

SCALE

-

WEIGHT: .003 LB MAX

SHEET 1 OF 1