


Maximum  
600 VAC or  
250 VDC

### Ordering Information

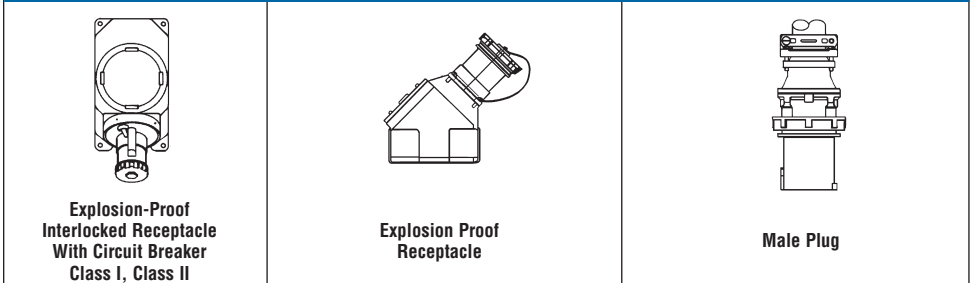

Poles Wires	Voltage (VAC)	Cat. No.	Cat. No.	Cat. No.	Std. Bushing I.D.*
<b>30 Amp</b>					
2P3W	125	DBRE3 <b>107</b> 03000	DSE3 <b>107</b> FRO	DS3 <b>107</b> MP000	7/8"
2P3W	250	DBRE3 <b>207</b> 03000	DSE3 <b>207</b> FRO	DS3 <b>207</b> MP000	7/8"
3P4W	3Ø250	DBRE3 <b>307</b> 03000	DSE3 <b>307</b> FRO	DS3 <b>307</b> MP000	1"
3P4W	3Ø480	DBRE3 <b>404</b> 03000	DSE3 <b>404</b> FRO	DS3 <b>404</b> MP000	1"
4P5W	277/480	DBRE3 <b>504</b> 03000	DSE3 <b>504</b> FRO	DS3 <b>504</b> MP000	1 1/16"
<b>60 Amp</b>					
2P3W	250	DBRE6 <b>207</b> 06000	—	DS6 <b>207</b> MP000	1 1/16"
3P4W	3Ø250	DBRE6 <b>307</b> 06000	—	DS6 <b>307</b> MP000	1 1/16"
3P4W	3Ø480	DBRE6 <b>404</b> 06000	—	DS6 <b>404</b> MP000	1 1/16"
4P5W	277/480	DBRE6 <b>504</b> 06000	—	DS6 <b>504</b> MP000	1 1/2"
<b>100 Amp</b>					
2P3W	250	DBRE1 <b>207</b> 10000	—	DS1 <b>207</b> MP000	1 1/16"
3P4W	3Ø250	DBRE1 <b>307</b> 10000	—	DS1 <b>307</b> MP000	1 13/16"
3P4W	3Ø480	DBRE1 <b>404</b> 10000	—	DS1 <b>404</b> MP000	1 13/16"
4P5W	277/480	DBRE1 <b>504</b> 10000	—	DS1 <b>504</b> MP000	2"

\* Non-fused version available. Replace DFRF with DNRF.

**Boldface** figures are for voltage assignment; for different ratings see following pages.

☞ \* **Notes to Catalog Numbers: Suffixes**

#### ▼Control Contacts

(position 12)  
use "K" example:  
DBRF6104060K0

#### Breaker Trip Ratings

(positions 9, 10, 11)  
30 amp use 030  
50 amp 050  
60 amp 060

#### Shunt Trip Breaker

(position 13)  
add "Z" to above:  
DBRF6104060KZ


#### Non-Auto Sw. NAO

(repl. "DBRE" with  
"DSRE")

For specification information and additional bushing sizes see MaxGuard section, pages 9-29.

### Dimensions

#### Explosion-Proof Interlocked Receptacle



Amp	A	B	C	D	E
30	8 3/4"	7 1/2"	1/2"	14 3/4"	20"
60	8 3/4"	7 1/2"	1/2"	14 3/4"	20"
100	8 3/4"	7 1/2"	1/2"	14 3/4"	20"

#### Explosion-Proof Receptacle

