


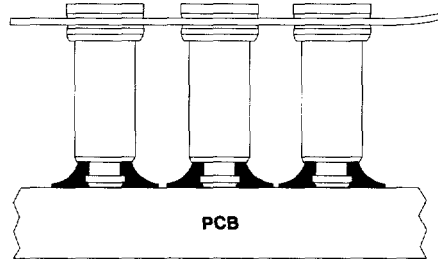


Surface Mount Pin Grid Array Sockets

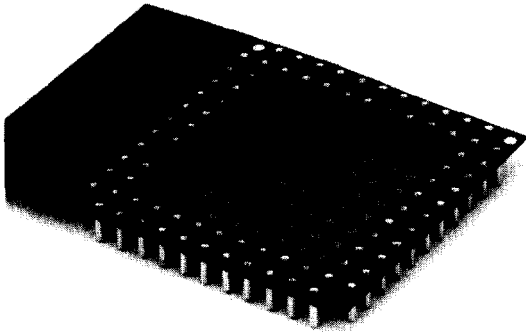

Peel-A-Way® Surface Mount Sockets



Surface Mount Top/Bottom

Features:

- Sockets surface mount to PCB.
- Available in high temperature Peel-A-Way® socket terminal carrier.
- Peel-A-Way® carrier can be left in place for added stability.
- High reliability screw machine terminals with multiple finger beryllium copper contacts.
- Available with solder preforms.

Terminals and Contacts:

Terminal: Brass - Copper Alloy 360, ASTM-B-16

Contact: Beryllium Copper - Copper Alloy 172, ASTM-B-194

Plating:

Terminal: Tin-Lead over Nickel




Contact: Gold over Nickel

Body Material:

KS/KIS - Polyimide Film


Temp. range -269°C to 400°C

Terminal Information

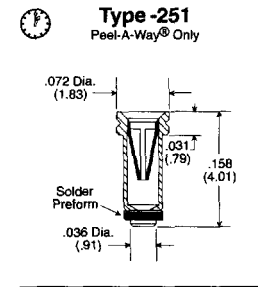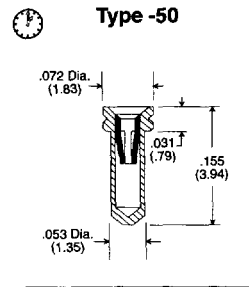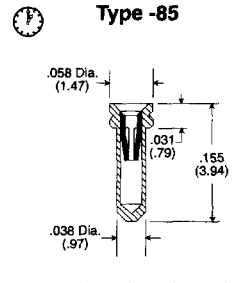


Quick turn delivery available on standard terminal types. Additional terminal types available.


How To Order

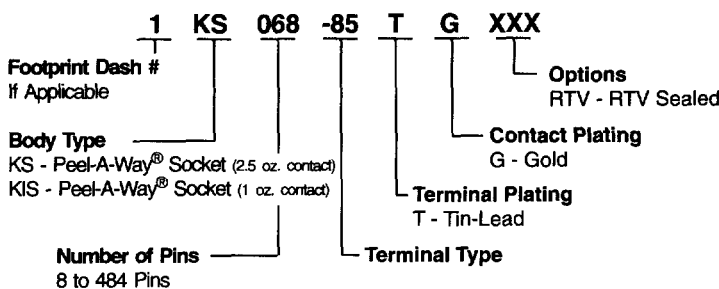

Socket Options

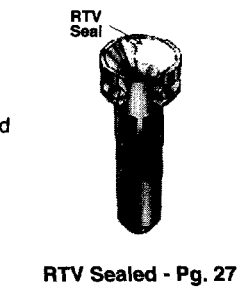

RTV Sealed - Pg. 27

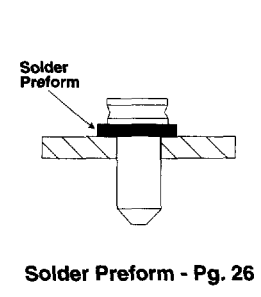

Solder Preform - Pg. 26

See designated pages for how to order information on these socket options.