

Ultra Small Temperature Switch with Pin-Selectable Hysteresis


FEATURES

- 5-Pin SOT-23A
- Factory-Programmed Thresholds from -45°C to $+115^{\circ}\text{C}$ in 10°C Increments
- Pin-Selectable $+2^{\circ}\text{C}$ or $+10^{\circ}\text{C}$ Hysteresis
- $\pm 0.5^{\circ}\text{C}$ (Typ) Threshold Accuracy Over Full Temperature Range
- No External Components Required
- $17\mu\text{A}$ Supply Current

TYPICAL APPLICATIONS

- Thermal Management in PCs and Servers
- Over Temperature Fail Safe Circuits
- Simple Fan Controller
- Temperature Alarms
- Projectors / Printers
- Notebook Computers
- Network Boxes

PIN CONFIGURATIONS

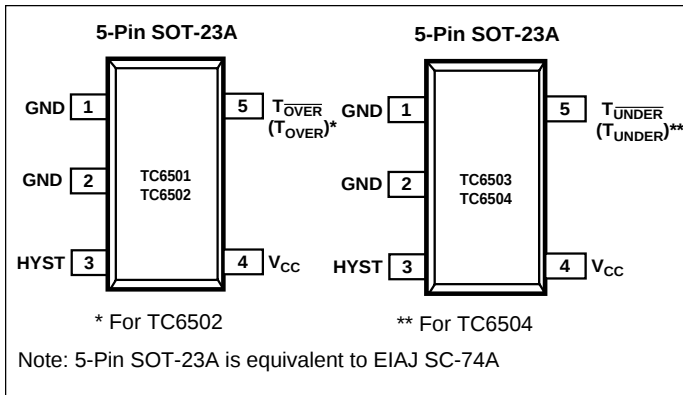

GENERAL DESCRIPTION

The TC6501 through TC6504 are SOT-23 temperature switches that require no external components and the design is facilitated with factory programmed temperature thresholds. A choice of factory-trimmed temperature trip points are available. Pin selectable hysteresis of $+2^{\circ}\text{C}$ or $+10^{\circ}\text{C}$ allows flexibility to the design. These parts typically consume only $17\mu\text{A}$ of current and operate over the entire -55°C to $+125^{\circ}\text{C}$ temperature range while offering accuracies of $\pm 0.5^{\circ}\text{C}$ (typ) and $\pm 4^{\circ}\text{C}$ (max).

The TC6501 and TC6503 offer an open drain, active low output, meant for microprocessor reset control. The TC6502 and TC6504 have a CMOS, active high output designed to drive a logic level MOSFET to turn on a fan or heater element.

The TC6501/TC6502 are aimed for hot-temperature monitoring ($+35^{\circ}\text{C}$ to $+115^{\circ}\text{C}$). These devices assert a logic signal when the temperature goes above the threshold. The TC6503/TC6504 are aimed for cold-temperature monitoring (-45°C to $+15^{\circ}\text{C}$). These devices assert a logic signal when the temperature goes below the threshold.

The TC6501 through TC6504 are offered in five standard temperature thresholds. Available in 5-Pin SOT-23A packages, these parts are ideal for applications requiring high integration, small size, low power and low installed cost.

ORDERING INFORMATION

Part No	Package	Standard Temp. Threshold	Output Stage
TC6501P045VCT	5-Pin SOT-23A	45°C	Open Drain
TC6501P065VCT	5-Pin SOT-23A	65°C	Open Drain
TC6501P095VCT	5-Pin SOT-23A	95°C	Open Drain
TC6502P045VCT	5-Pin SOT-23A	45°C	Push/Pull
TC6502P065VCT	5-Pin SOT-23A	65°C	Push/Pull
TC6502P095VCT	5-Pin SOT-23A	95°C	Push/Pull
TC6503N015VCT	5-Pin SOT-23A	-15°C	Open Drain
TC6503P005VCT	5-Pin SOT-23A	5°C	Open Drain
TC6504N015VCT	5-Pin SOT-23A	-15°C	Push/Pull
TC6504P005VCT	5-Pin SOT-23A	5°C	Push/Pull

Notes: TC6501 and TC6502 are offered in 3 standard temperature settings. Other non-standard versions are available (including 55°C , 75°C , 85°C , 105°C and 115°C), please contact factory for more information. TC6503 and TC6504 are offered in 2 standard temperature settings. Other non-standard versions are available (including -45°C , -35°C , -25°C and -5°C), please contact factory for more information.

A letter "P" in the part number indicates a positive temperature sign or "N" for a negative temperature sign.

TC6501
TC6502
TC6503
TC6504

ABSOLUTE MAXIMUM RATINGS*

Supply Voltage (V_{CC}) -0.3V to +7V
 $\overline{TOVER}$ (TC6501) -0.3V to +7V
 $\overline{TOVER}$ (TC6502) -0.3V to ($V_{CC} + 0.3V$)
 $\overline{TUNDER}$ (TC6503) -0.3V to 7V
 $\overline{TUNDER}$ (TC6504) -0.3V to ($V_{CC} + 0.3V$)
 All Other Pins -0.3V to ($V_{CC} + 0.3V$)
 Input Current (All Pins) 20mA
 Output Current (All Pins) 20mA
 Operating Temperature Range -55°C to +125°C
 Storage Temperature Range -65°C to +165°C

Lead Temperature (Soldering, 10 sec) +300°C
 Power Dissipation ($T_A = +70^\circ\text{C}$)
 (Derate 7.1mW/°C Above +70°C) 571mW

*Static-sensitive device. Unused devices must be stored in conductive material. Protect devices from static discharge and static fields. Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions above those indicated in the operational sections of the specifications is not implied. Exposure to Absolute Maximum Rating Conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS: $V_{CC} = +2.7V$ to $+5.5V$, $R_{PULL-UP} = 100K\Omega$ (TC6501/TC6503 only),
 $C_{COUPLING} = 100\text{ pF}$ from V_{CC} to GND, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted. Typical values are at $T_A = +25^\circ\text{C}$.

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
V_{CC}	Supply Voltage Range		2.7	—	5.5	V
I_{CC}	Supply Current		—	17	40	μA
ΔT_{TH}	Temperature Threshold Accuracy (Note 1)	-45°C to -25°C	-6	± 0.5	6	°C
		-15°C to +15°C	-4	± 0.5	4	
		+35°C to +65°C	-4	± 0.5	4	
		+75°C to +115°C	-6	± 0.5	6	
T_{HYST}	Temperature Threshold Hysteresis	$HYST = GND$	—	2	—	°C
		$HYST = V_{CC}$	—	10	—	
V_{IH}	HYST Input Threshold		$0.8 \times V_{CC}$	—	—	V
V_{IL}	HYST Input Threshold		—	—	$0.2 \times V_{CC}$	V
V_{OH}	Output Voltage High	$I_{SOURCE} = 500\mu\text{A}$, $V_{CC} > 2.7V$ (TC6502/TC6504 Only)	$0.8 \times V_{CC}$	—	—	V
		$I_{SOURCE} = 800\mu\text{A}$, $V_{CC} > 4.5V$ (TC6502/TC6504 Only)	$V_{CC} - 1.5$	—	—	V
V_{OL}	Output Voltage Low	$I_{SINK} = 1.2\text{mA}$, $V_{CC} > 2.7V$	—	—	0.3	V
		$I_{SINK} = 3.2\text{mA}$, $V_{CC} > 4.5V$	—	—	0.4	V
	Open-Drain Output Leakage Current	$V_{CC} = 2.7V$, $V_{\overline{TUNDER}} = 5.5V$ (TC6503); $V_{\overline{TOVER}} = 5.5V$ (TC6501)	—	10	—	nA

NOTES: 1. The TC6501 through TC6504 are available with internal, factory-programmed temperature trip thresholds from -45°C to +115°C in +10°C increments.


Ultra Small Temperature Switch with Pin-Selectable Hysteresis

TC6501
TC6502
TC6503
TC6504

PIN DESCRIPTION

TC6501	TC6502	TC6503	TC6504	Name	Description
1,2	1,2	1,2	1,2	GND	Ground. Ground both pins together close to the chip. Pin 2 provides the lowest thermal resistance to the die.
3	3	3	3	HYST	Hysteresis Input. Connect HYST to GND for +2°C hysteresis, or connect to V _{CC} for +10°C hysteresis.
4	4	4	4	V _{CC}	Supply Input (+2.7V to +5.5V). Recommend 100pF or greater Coupling capacitor from V _{CC} to GND.
5	—	—	—	$\overline{\text{TOVER}}$	Open-Drain, Active-Low Output. $\overline{\text{TOVER}}$ goes low when the die temperature exceeds the factory-programmed temperature threshold. Connect to a 100 K Ω pull-up resistor. May be pulled up to a voltage higher than V _{CC} .
—	5	—	—	TOVER	Push/Pull Active-High Output. TOVER goes high when the die temperature exceeds the factory-programmed temperature threshold.
—	—	5	—	$\overline{\text{TUNDER}}$	Open-Drain, Active-Low Output. $\overline{\text{TUNDER}}$ goes low when the die temperature goes below the factory-programmed temperature threshold. Connect to a 100 K Ω pull-up resistor. May be pulled up to a voltage higher than V _{CC} .
—	—	—	5	TUNDER	Push/Pull Active-High Output. TUNDER goes high when the die temperature is below the factory-programmed temperature threshold.

TYPICAL OPERATING CIRCUIT

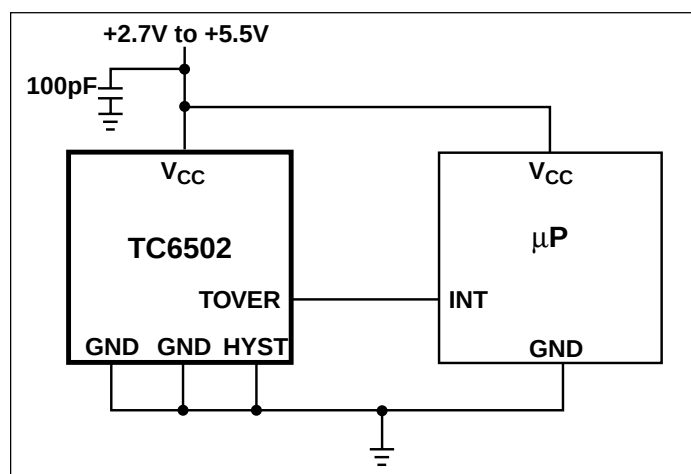

TC6503 are intended for applications with a microprocessor reset input. The TC6502 and TC6504 are intended for applications of turning on a fan or heater element.

Hysteresis Input

To prevent the output from “chattering” at or near the trip point temperature, a selectable HYST input pin is provided. Hysteresis can be externally selected at 2 °C (HYST = GND) or 10°C (HYST = V_{DD}) by means of the CMOS compatible HYST input pin. Do not let the HYST pin float as this could cause increase supply current. The hysteresis does not depend on the part’s programmed trip threshold.

Table 1. Factory-Programmed Threshold Range

Part Number	Threshold (T _{TH}) Range
TC6501	+35°C < T _{TH} < +115°C
TC6502	+35°C < T _{TH} < +115°C
TC6503	–45°C < T _{TH} < +15°C
TC6504	–45°C < T _{TH} < +15°C

Thermal Considerations

With a very low 17μA supply current, the TC6501 through TC6504 dissipates very little power. Thus, the die temperature is basically the same as the package temperature. To minimize the error in temperature readings, the load current should be limited to a few milliamps. As an example, the typical thermal resistance of a 5-Pin SOT-23A package is 140°C/W. If for instance the TC6501 had to sink

DETAILED DESCRIPTION

The TC6501 through TC6504 integrate a temperature sensor with a factory programmed threshold switch. A logic signal is asserted when the die temperature crosses the factory programmed threshold. An external hysteresis input pin allows the user to select either 2°C or 10°C hysteresis to give further flexibility to the design of the application. The TC6501 and TC6502 are intended for a temperature range from 35°C to 115°C in a 10°C increment. The TC6501 has an open drain output and the TC6502 has a push/pull output stage.

The TC6503 and TC6504 are intended for a cold temperature range from –45°C to +15°C in a 10°C increment. The TC6503 has an open drain output and the TC6504 has a push/pull output stage. The TC6501 and



Ultra Small Temperature Switch with Pin-Selectable Hysteresis

Temperature monitoring accuracy depends on the thermal resistance between the device being monitored and the temperature switch die. Heat flows primarily through the leads onto the die. Pin 2 provides the lowest thermal resistance to the die. To achieve the best temperature monitoring results, the TC6501 through TC6504 should be placed closest to the device being monitored. In addition, a short and wide copper trace from Pin 2 to the device should be used. In some cases, the 5-Pin SOT-23A package can be placed directly under the socketed microprocessor for improved thermal contact.

The TC6501 and TC6503 have open drain outputs and are therefore intended to interface as microprocessor reset inputs. Moreover, the combination of these two devices can be used to implement a temperature window alarm by wire-ORing the outputs and using an external pull up resistor. (See Figure 1)



The TC6504 with its push/pull output could be used in a similar fashion to turn on a heater element at cold temperatures. (See Figure 3)



Ultra Small Temperature Switch with Pin-Selectable Hysteresis

TC6501
TC6502
TC6503
TC6504


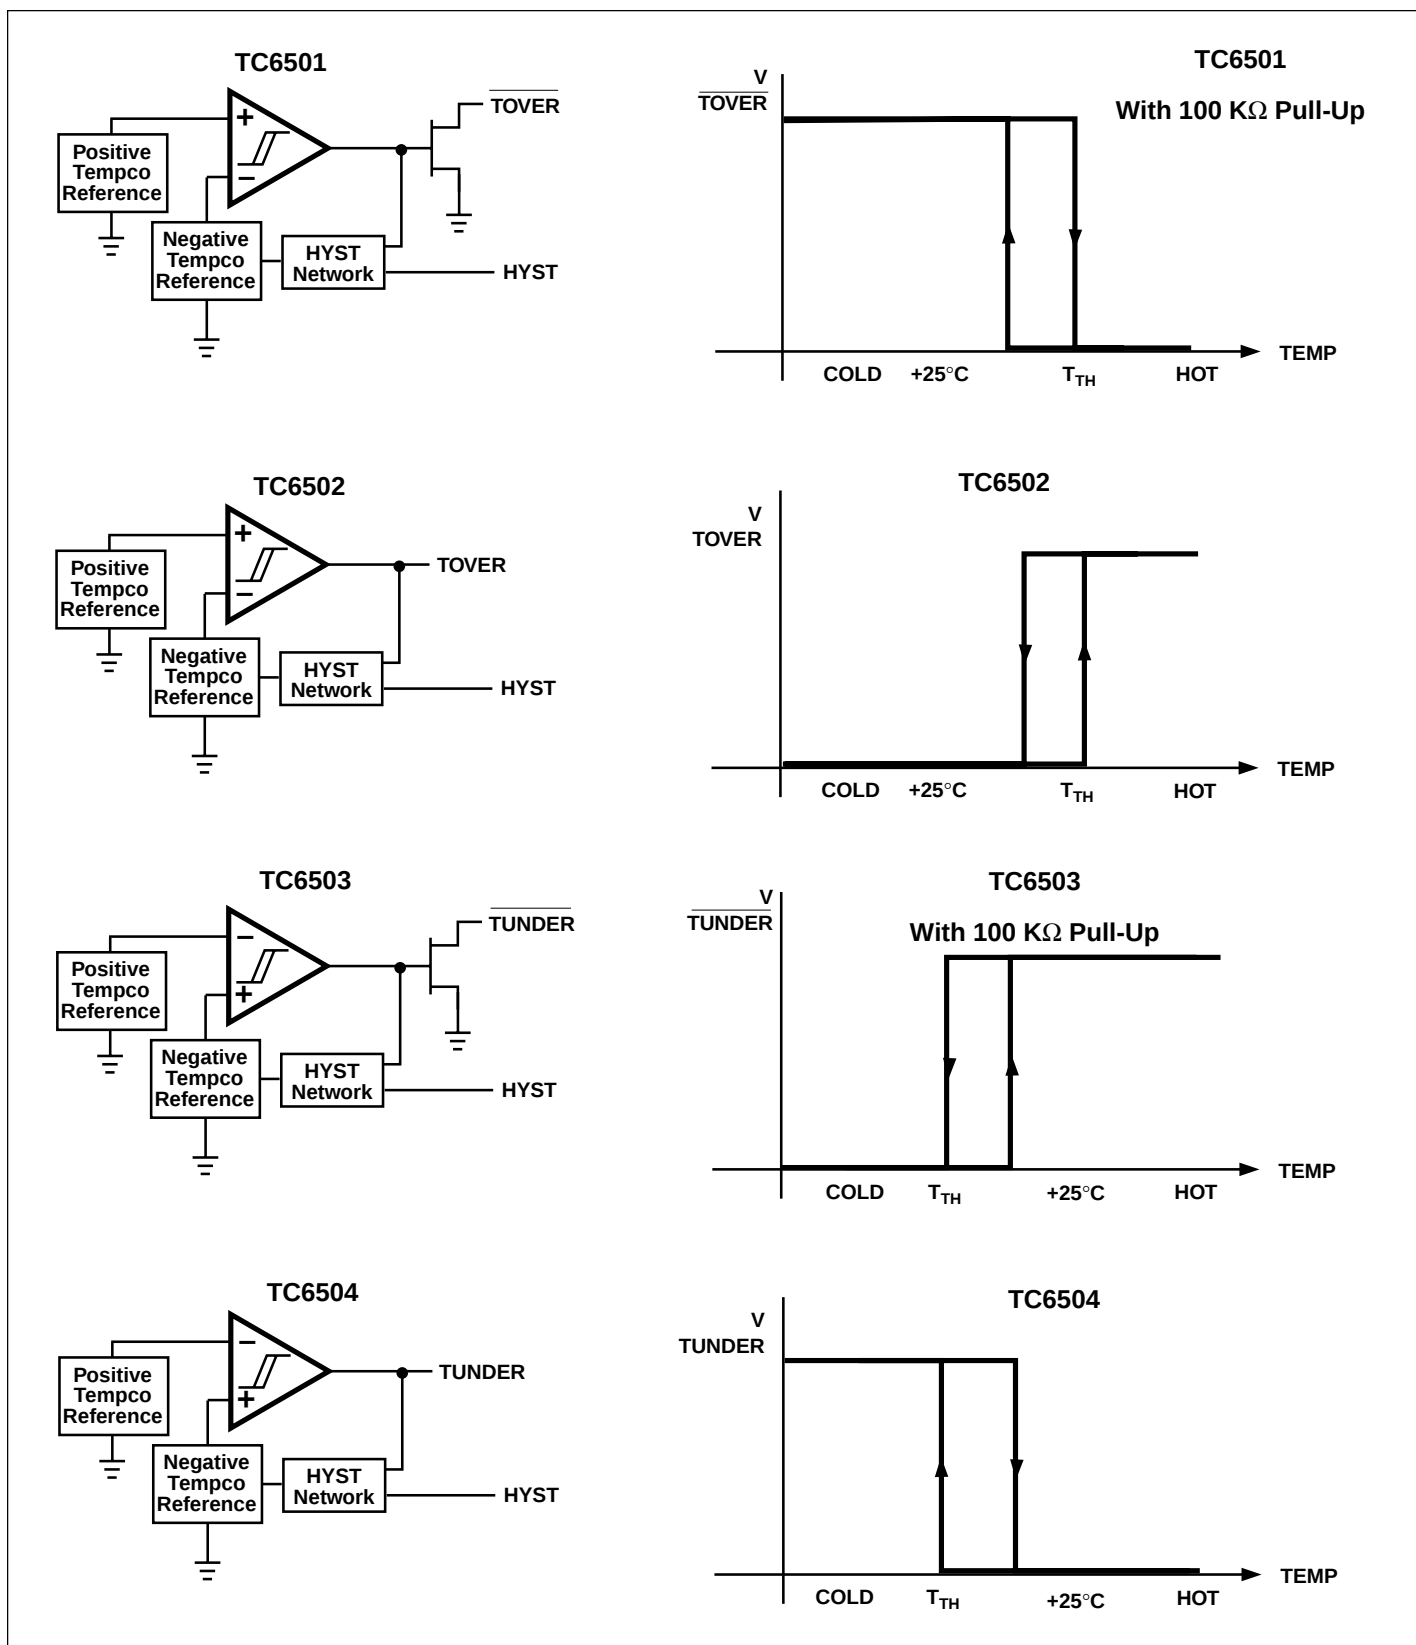


Figure 4. Functional Block Diagrams


TYPICAL CHARACTERISTICS CURVES

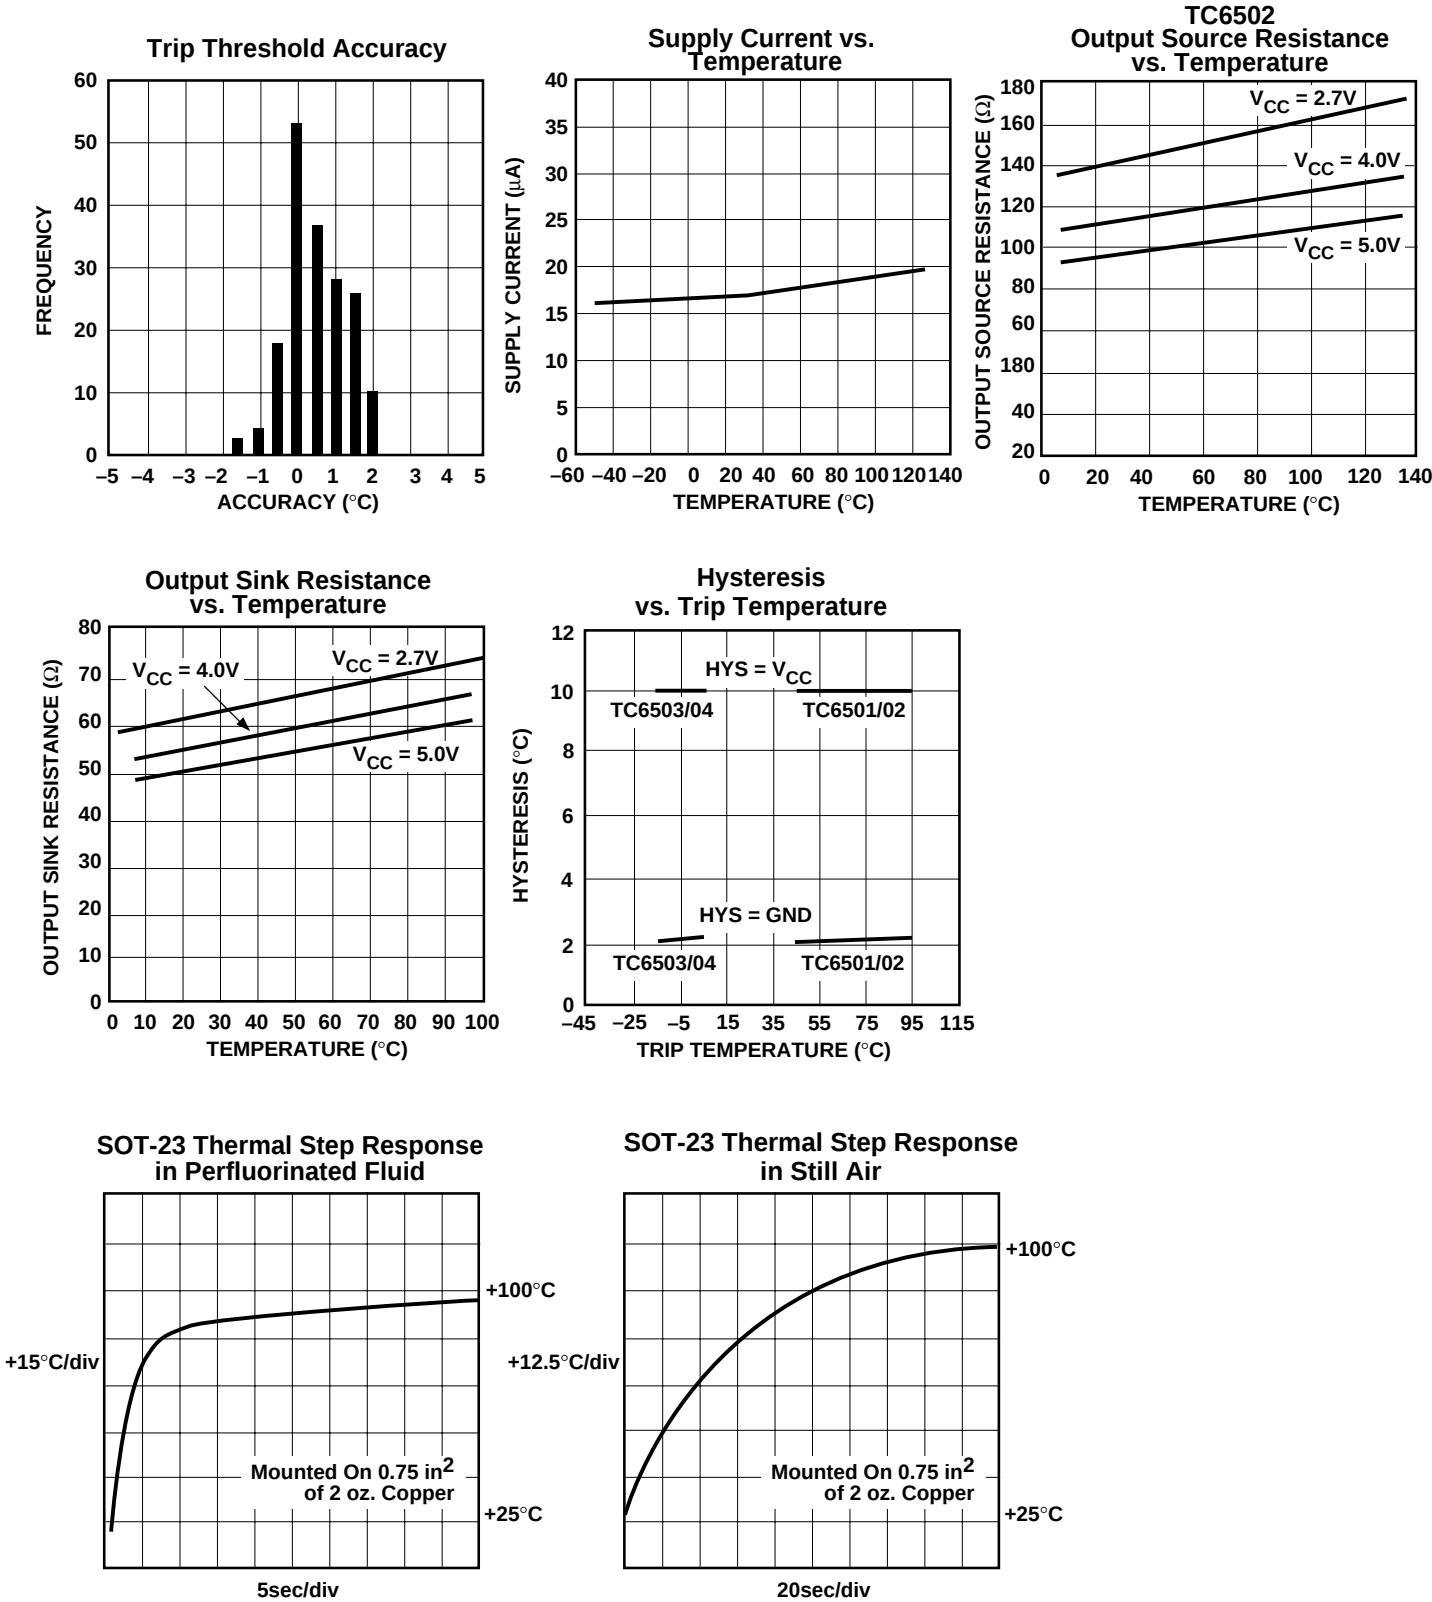

Ultra Small Temperature Switch with Pin-Selectable Hysteresis

TC6501
TC6502
TC6503
TC6504

MARKING

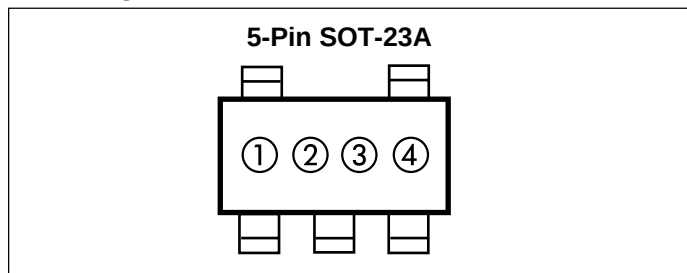

Part Numbers and Part Marking


Part Number	Code
TC6501P045VCT	HA
TC6501P065VCT	HC
TC6501P095VCT	HF
TC6502P045VCT	JA
TC6502P065VCT	JC
TC6502P095VCT	JF
TC6503N015VCT	KA
TC6503P005VCT	KB
TC6504N015VCT	LA
TC6504P005VCT	LB

- ① & ② = two letter part number codes
- ③ represents year and two-month period code
- ④ represents lot ID number

ex: 6501P045VCT = (H)(A)○○○

TAPING FORM

Component Taping Orientation for 5-Pin SOT-23A (EIAJ SC-74A) Devices

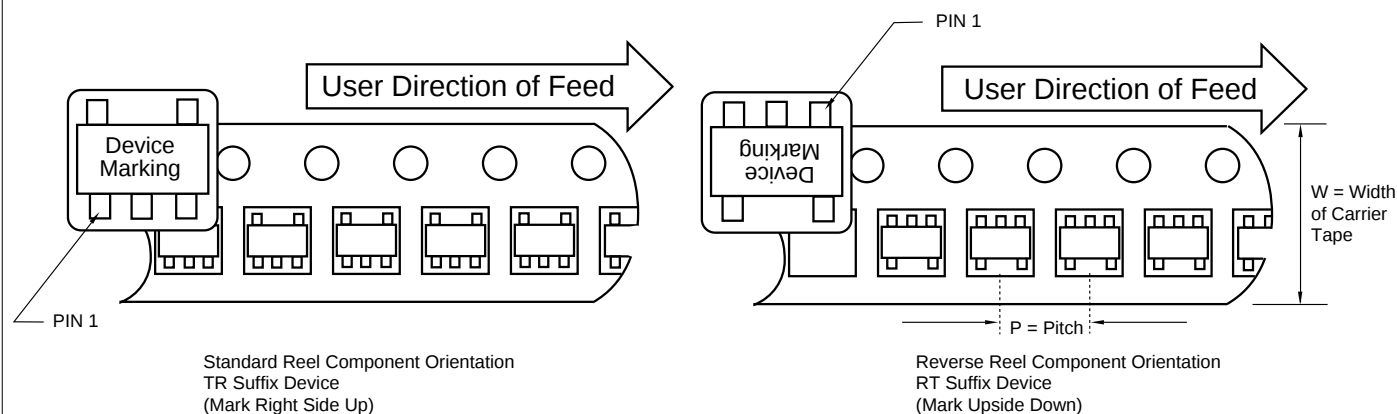

Carrier Tape, Reel Size, and Number of Components Per Reel


Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
5-Pin SOT-23A	8 mm	4 mm	3000	7 in

TC6501
TC6502
TC6503
TC6504

Ultra Small Temperature Switch
with Pin-Selectable Hysteresis

PACKAGE DIMENSIONS

5-Pin SOT-23A (EIAJ SC-74A)

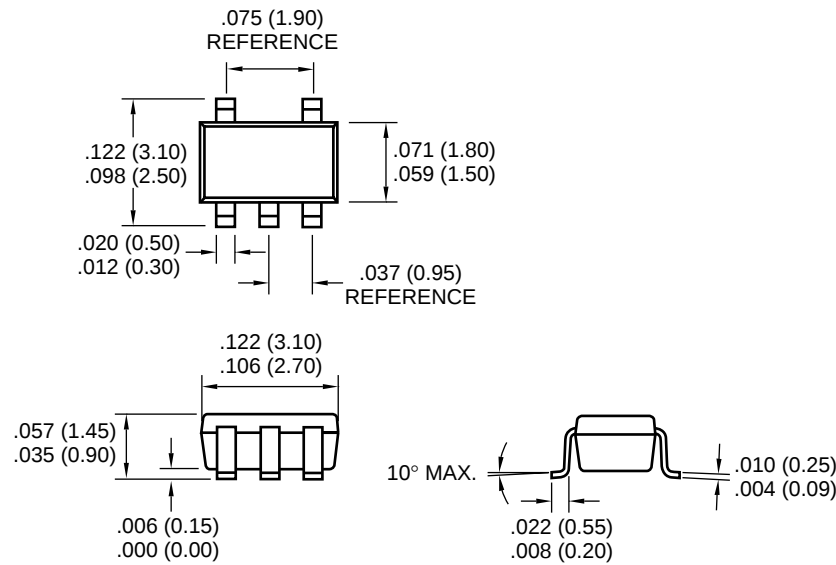

Dimensions: inches (mm)



WORLDWIDE SALES AND SERVICE

AMERICAS

Corporate Office

2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200 Fax: 480-792-7277
Technical Support: 480-792-7627
Web Address: <http://www.microchip.com>

Rocky Mountain

2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7966 Fax: 480-792-7456

Atlanta

500 Sugar Mill Road, Suite 200B
Atlanta, GA 30350
Tel: 770-640-0034 Fax: 770-640-0307

Austin

Analog Product Sales
8303 MoPac Expressway North
Suite A-201
Austin, TX 78759
Tel: 512-345-2030 Fax: 512-345-6085

Boston

2 Lan Drive, Suite 120
Westford, MA 01886
Tel: 978-692-3848 Fax: 978-692-3821

Boston

Analog Product Sales
Unit A-8-1 Millbrook Tarry Condominium
97 Lowell Road
Concord, MA 01742
Tel: 978-371-6400 Fax: 978-371-0050

Chicago

333 Pierce Road, Suite 180
Itasca, IL 60143
Tel: 630-285-0071 Fax: 630-285-0075

Dallas

4570 Westgrove Drive, Suite 160
Addison, TX 75001
Tel: 972-818-7423 Fax: 972-818-2924

Dayton

Two Prestige Place, Suite 130
Miamisburg, OH 45342
Tel: 937-291-1654 Fax: 937-291-9175

Detroit

Tri-Atria Office Building
32255 Northwestern Highway, Suite 190
Farmington Hills, MI 48334
Tel: 248-538-2250 Fax: 248-538-2260

Los Angeles

18201 Von Karman, Suite 1090
Irvine, CA 92612
Tel: 949-263-1888 Fax: 949-263-1338

Mountain View

Analog Product Sales
1300 Terra Bella Avenue
Mountain View, CA 94043-1836
Tel: 650-968-9241 Fax: 650-967-1590

New York

150 Motor Parkway, Suite 202
Hauppauge, NY 11788
Tel: 631-273-5305 Fax: 631-273-5335

San Jose

Microchip Technology Inc.
2107 North First Street, Suite 590
San Jose, CA 95131
Tel: 408-436-7950 Fax: 408-436-7955

Toronto

6285 Northam Drive, Suite 108
Mississauga, Ontario L4V 1X5, Canada
Tel: 905-673-0699 Fax: 905-673-6509

ASIA/PACIFIC

China - Beijing

Microchip Technology Beijing Office
Unit 915
New China Hong Kong Manhattan Bldg.
No. 6 Chaoyangmen Beidajie
Beijing, 100027, No. China
Tel: 86-10-85282100 Fax: 86-10-85282104

China - Shanghai

Microchip Technology Shanghai Office
Room 701, Bldg. B
Far East International Plaza
No. 317 Xian Xia Road
Shanghai, 200051
Tel: 86-21-6275-5700 Fax: 86-21-6275-5060

Hong Kong

Microchip Asia Pacific
RM 2101, Tower 2, Metroplaza
223 Hing Fong Road
Kwai Fong, N.T., Hong Kong
Tel: 852-2401-1200 Fax: 852-2401-3431

India

Microchip Technology Inc.
India Liaison Office
Divyasree Chambers
1 Floor, Wing A (A3/A4)
No. 11, O'Shaughnessy Road
Bangalore, 560 025, India
Tel: 91-80-2290061 Fax: 91-80-2290062

Japan

Microchip Technology Intl. Inc.
Benex S-1 6F
3-18-20, Shinyokohama
Kohoku-Ku, Yokohama-shi
Kanagawa, 222-0033, Japan
Tel: 81-45-471-6166 Fax: 81-45-471-6122

Korea

Microchip Technology Korea
168-1, Youngbo Bldg. 3 Floor
Samsung-Dong, Kangnam-Ku
Seoul, Korea
Tel: 82-2-554-7200 Fax: 82-2-558-5934

ASIA/PACIFIC (continued)

Singapore

Microchip Technology Singapore Pte Ltd.
200 Middle Road
#07-02 Prime Centre
Singapore, 188980
Tel: 65-334-8870 Fax: 65-334-8850

Taiwan

Microchip Technology Taiwan
11F-3, No. 207
Tung Hua North Road
Taipei, 105, Taiwan
Tel: 886-2-2717-7175 Fax: 886-2-2545-0139

EUROPE

Australia

Microchip Technology Australia Pty Ltd
Suite 22, 41 Rawson Street
Epping 2121, NSW
Australia
Tel: 61-2-9868-6733 Fax: 61-2-9868-6755

Denmark

Microchip Technology Denmark ApS
Regus Business Centre
Lautrup høj 1-3
Ballerup DK-2750 Denmark
Tel: 45 4420 9895 Fax: 45 4420 9910

France

Arizona Microchip Technology SARL
Parc d'Activite du Moulin de Massy
43 Rue du Saule Trapu
Batiment A - 1er Etage
91300 Massy, France
Tel: 33-1-69-53-63-20 Fax: 33-1-69-30-90-79

Germany

Arizona Microchip Technology GmbH
Gustav-Heinemann Ring 125
D-81739 Munich, Germany
Tel: 49-89-627-144 0 Fax: 49-89-627-144-44

Germany

Analog Product Sales
Lochhamer Strasse 13
D-82152 Martinsried, Germany
Tel: 49-89-895650-0 Fax: 49-89-895650-22

Italy

Arizona Microchip Technology SRL
Centro Direzionale Colleoni
Palazzo Taurus 1 V. Le Colleoni 1
20041 Agrate Brianza
Milan, Italy
Tel: 39-039-65791-1 Fax: 39-039-6899883

United Kingdom

Arizona Microchip Technology Ltd.
505 Eskdale Road
Winnersh Triangle
Wokingham
Berkshire, England RG41 5TU
Tel: 44 118 921 5869 Fax: 44-118 921-5820

All rights reserved. © 2001 Microchip Technology Incorporated. Printed in the USA. 1/01 Printed on recycled paper.

01/09/01

Information contained in this publication regarding device applications and the like is intended through suggestion only and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. No representation or warranty is given and no liability is assumed by Microchip Technology Incorporated with respect to the accuracy or use of such information, or infringement of patents or other intellectual property rights arising from such use or otherwise. Use of Microchip's products as critical components in life support systems is not authorized except with express written approval by Microchip. No licenses are conveyed, implicitly or otherwise, except as maybe explicitly expressed herein, under any intellectual property rights. The Microchip logo and name are registered trademarks of Microchip Technology Inc. in the U.S.A. and other countries. All rights reserved. All other trademarks mentioned herein are the property of their respective companies.