

Nominal diameter Withdraw. force Rated current Contact resistance

Type


Part No.

3 mm ~ 5 N 30 A 0.5 mΩ

SA 309

22.5109

Multilam™ plug 3 mm (.118 in) dia., gold plated.

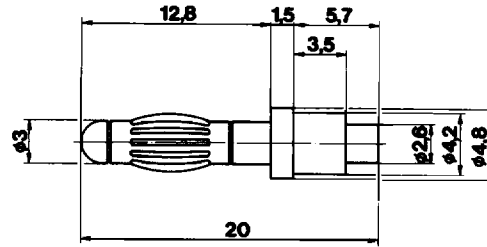


2:1

3 mm ~ 2.5 N 30 A 0.5 mΩ

LS 305-L

22.5108

Multilam™ plug 3 mm (.118 in) dia., with solder cup terminal. Gold plated.

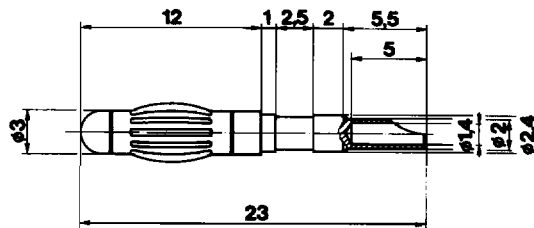

2:1

3 mm - ~ 10 A 0.6 mΩ

LK 305-L

21.4950
(7.5 cm)

Highly flexible patch cord with 3 mm (.118 in) dia. MC® Multilam™ plugs. Plugs machined brass, gold plated and spring-loaded with MC®-Multilam™. PVC insulated wire 0.5 mm² (20 AWG).

21.4960
(15 cm)


21.4970
(30 cm)

21.4980
(45 cm)

21.4990
(60 cm)

Components:

- Multilam Plug LS 305-L # 22.5108
- Insulator (polyamide) KT 2-S # 22.2010
- Wire HK 0.5 PVC # 22.0010
- Operating temperature -40°C to +70°C (-40°F to 158°F)

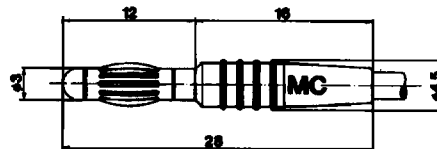

1.5:1

LS 305-L

KT 2-S

Colors: 0 - 9



0 - green/yellow 1 - red 2 - blue 3 - white 4 - black 5 - yellow 6 - green 7 - brown 8 - gray 9 - violet