




5KP5.0A / CA(S) - 5KP180A / CA(S)

5000W TRANSIENT VOLTAGE SUPPRESSORS

Features

- 5000W Peak Power Dissipation
- Standoff Voltage Range 5.0V - 180V
- Constructed with Glass Passivated Die
- Uni and Bidirectional Versions Available
- Excellent Clamping Capability
- Fast Response Time
- 100% Tested at Rated Peak Pulse Power

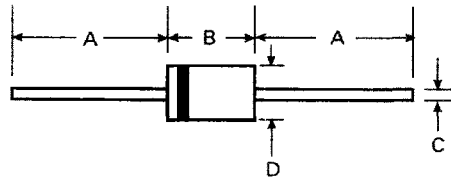

Mechanical Data

- Case: Transfer Molded Epoxy
- Leads: Axial, Solderable per MIL-STD-202 Method 208
- Marking: Unidirectional - Type Number and Cathode Band
- Marking: Bidirectional - Type Number Only
- Approx. Weight: 2.1 grams
- Mounting Position: Any

Dim	5KP		5KW	
	Min	Max	Min	Max
A	25.40	—	25.40	—
B	—	8.60	—	9.00
C	0.95	1.07	1.20	1.30
D	—	9.53	—	8.00

All Dimensions in mm

"S" Suffix Designates 5KW Package
No Suffix Designates 5KP Package

Maximum Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Value	Unit
Peak Power Dissipation at $T_p = 1.0\text{ms}$ (non-repetitive current pulse, per Figure 1 and derated above $T_A = 25^\circ\text{C}$ per Figure 4)	P_{pk}	5000	W
Steady state power dissipation at $T_J = 75^\circ\text{C}$ Lead lengths 9.5 mm per Figure 5 Mounted on copper land area of 20mm^2	P_d	8.0	W
Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method) Duty cycle = 4 pulses per minute (maximum)	I_{FSM}	400	A
Forward Voltage @ $I_F = 100\text{A}$ 300 μA Square Wave Pulse Unidirectional Only	V_F	3.5	V
Operating and storage temperature range	T_J, T_{STG}	-55 to +175	$^\circ\text{C}$

Notes: 1. S-suffix package (5KW) identified as follows: 5KPXX(C) (A) S.

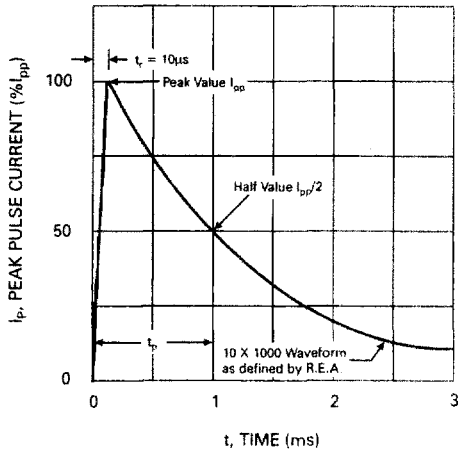


Fig. 1 Pulse Waveform

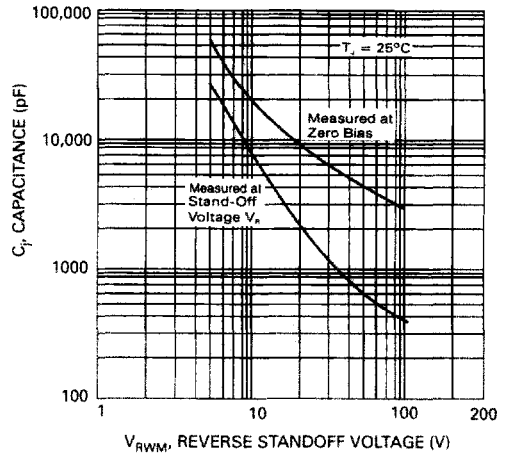


Fig. 2. Typical Junction Capacitance

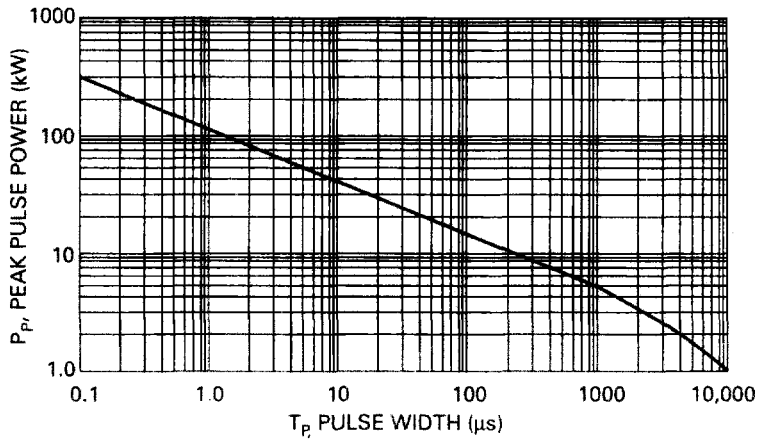


Fig. 3, Pulse Derating Curve

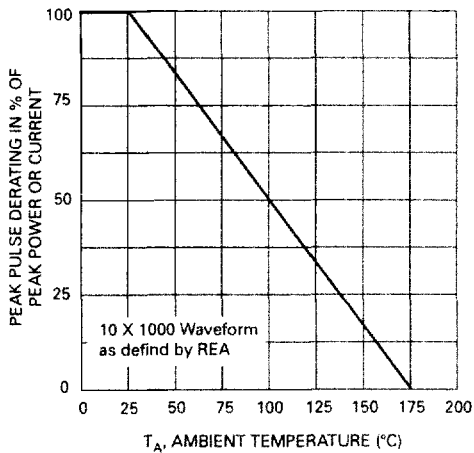


Fig. 4, Pulse Derating Curve

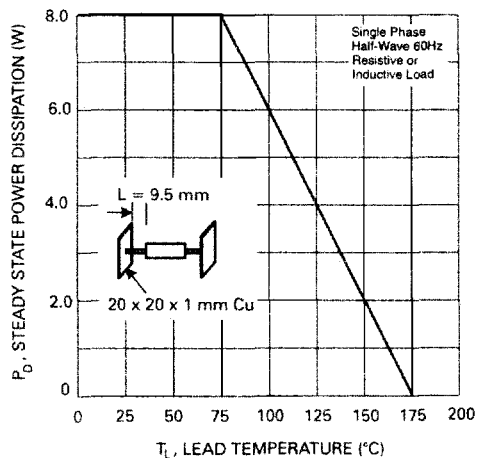


Fig. 5, Steady State Power Derating

Type Number	Type Number	Reverse Standoff Voltage	Breakdown Voltage V_{BR} @ I_T		Test Current	Max. Reverse Leakage @ V_R	Max. clamping Voltage @ I_{PP}	Max. Peak Pulse Current	Max. Voltage Temp. Variation of V_{BR}
			V_{RWM} (V)	MIN (V)					
5KP5.0	5KP5.0C	5.0	6.40	7.30	50	5000	9.6	520.0	4.0
5KP5.0A	5KP5.0CA	5.0	6.40	7.00	50	5000	9.2	543.0	4.0
5KP6.0	5KP6.0C	6.0	6.67	8.15	50	5000	11.4	439.0	4.0
5KP6.0A	5KP6.0CA	6.0	6.67	7.37	50	5000	10.3	485.0	4.0
5KP6.5	5KP6.5C	6.5	7.22	8.82	50	2000	12.3	407.0	4.0
5KP6.5A	5KP6.5CA	6.5	7.22	7.98	50	2000	11.2	447.0	4.0
5KP7.0	5KP7.0C	7.0	7.78	9.51	50	1000	13.3	378.0	5.0
5KP7.0A	5KP7.0CA	7.0	7.78	8.60	50	1000	12.0	417.0	5.0
5KP7.5	5KP7.5C	7.5	8.33	10.20	5.0	250	14.3	350.0	6.0
5KP7.5A	5KP7.5CA	7.5	8.33	9.21	5.0	250	12.9	388.0	6.0
5KP8.0	5KP8.0C	8.0	8.89	10.90	5.0	150	15.0	333.0	6.0
5KP8.0A	5KP8.0CA	8.0	8.89	9.83	5.0	150	13.6	367.0	6.0
5KP8.5	5KP8.5C	8.5	9.44	11.50	5.0	50	15.9	314.0	7.0
5KP8.5A	5KP8.5CA	8.5	9.44	10.40	5.0	50	14.4	347.0	7.0
5KP9.0	5KP9.0C	9.0	10.00	12.20	5.0	20	16.9	295.0	8.0
5KP9.0A	5KP9.0CA	9.0	10.00	11.10	5.0	20	15.4	325.0	8.0
5KP10	5KP10C	10.0	11.10	13.60	5.0	15	18.8	266.0	9.0
5KP10A	5KP10CA	10.0	11.10	12.30	5.0	15	17.0	294.0	9.0
5KP11	5KP11C	11.0	12.20	14.90	5.0	10	20.1	249.0	10
5KP11A	5KP11CA	11.0	12.20	13.50	5.0	10	18.2	274.0	10
5KP12	5KP12C	12.0	13.30	16.30	5.0	10	22.0	227.0	11
5KP12A	5KP12CA	12.0	13.30	14.70	5.0	10	19.9	251.0	11
5KP13	5KP13C	13.0	14.40	17.60	5.0	10	23.8	210.0	12
5KP13A	5KP13CA	13.0	14.40	15.90	5.0	10	21.5	232.0	12
5KP14	5KP14C	14.0	15.60	19.10	5.0	10	25.8	194.0	13
5KP14A	5KP14CA	14.0	15.60	17.20	5.0	10	23.2	215.0	13
5KP15	5KP15C	15.0	16.70	20.40	5.0	10	26.9	188.0	15
5KP15A	5KP15CA	15.0	16.70	18.50	5.0	10	24.4	206.0	15
5KP16	5KP16C	16.0	17.80	21.80	5.0	10	28.8	176.0	18
5KP16A	5KP16CA	16.0	17.80	19.70	5.0	10	26.0	192.0	16
5KP17	5KP17C	17.0	18.90	23.10	5.0	10	30.5	164.0	19
5KP17A	5KP17CA	17.0	18.90	20.90	5.0	10	27.6	181.0	18
5KP18	5KP18C	18.0	20.00	24.40	5.0	10	32.2	155.0	20
5KP18A	5KP18CA	18.0	20.00	22.10	5.0	10	29.2	172.0	19
5KP20	5KP20C	20.0	22.20	27.10	5.0	10	35.8	139.0	24
5KP20A	5KP20CA	20.0	22.20	24.50	5.0	10	32.4	154.0	22
5KP22	5KP22C	22.0	24.40	29.80	5.0	10	39.4	127.0	27
5KP22A	5KP22CA	22.0	24.40	26.90	5.0	10	35.5	141.0	24
5KP24	5KP24C	24.0	26.70	32.60	5.0	10	43.0	116.0	30
5KP24A	5KP24CA	24.0	26.70	29.50	5.0	10	38.9	128.0	27
5KP26	5KP26C	26.0	28.90	35.30	5.0	10	46.6	107.0	33
5KP26A	5KP26CA	26.0	28.90	31.90	5.0	10	42.1	119.0	29
5KP28	5KP28C	28.0	31.10	38.00	5.0	10	50.1	99.0	34
5KP28A	5KP28CA	28.0	31.10	34.40	5.0	10	45.5	110.0	30
5KP30	5KP30C	30.0	33.30	40.70	5.0	10	53.5	93.0	38
5KP30A	5KP30CA	30.0	33.30	36.80	5.0	10	48.4	103.0	35

Type Number	Type Number	Reverse Standoff Voltage	Breakdown Voltage V_{BR} @ I_T		Test Current	Max. Reverse Leakage @ V_R	Max. clamping Voltage @ I_{PP}	Max. Peak Pulse Current	Max. Voltage Temp. Variation of V_{BR}
			V_{RWM} (V)	MIN (V)					
(UNI)	(BI)	V_{RWM} (V)	MIN (V)	MAX (V)	I_t (mA)	I_R (μ A)	V_C (V)	I_{PP} (A)	mV/ $^{\circ}$ C
5KP33	5KP33C	33.0	36.70	44.90	5.0	10	59.0	86.0	41
5KP33A	5KP33CA	33.0	36.70	40.60	5.0	10	53.3	94.0	38
5KP36	5KP36C	36.0	40.00	48.90	5.0	10	64.3	78.0	45
5KP36A	5KP36CA	36.0	40.00	44.20	5.0	10	58.1	86.0	40
5KP40	5KP40C	40.0	44.40	54.30	5.0	10	71.4	70.0	50
5KP40A	5KP40CA	40.0	44.40	49.10	5.0	10	64.5	78.0	45
5KP43	5KP43C	43.0	47.80	58.40	5.0	10	76.7	65.0	54
5KP43A	5KP43CA	43.0	47.80	52.80	5.0	10	69.4	72.0	49
5KP45	5KP45C	45.0	50.00	61.10	5.0	10	80.3	62.0	57
5KP45A	5KP45CA	45.0	50.00	55.30	5.0	10	72.7	69.0	51
5KP48	5KP48C	48.0	53.30	65.10	5.0	10	85.5	58.0	62
5KP48A	5KP48CA	48.0	53.30	58.90	5.0	10	77.4	65.0	55
5KP51	5KP51C	51.0	56.70	69.30	5.0	10	91.1	55.0	65
5KP51A	5KP51CA	51.0	56.70	62.70	5.0	10	82.4	61.0	60
5KP54	5KP54C	54.0	60.00	73.30	5.0	10	96.3	52.0	70
5KP54A	5KP54CA	54.0	60.00	66.30	5.0	10	87.1	57.0	64
5KP58	5KP58C	58.0	64.40	78.70	5.0	10	103.0	49.0	77
5KP58A	5KP58CA	58.0	64.40	71.20	5.0	10	93.6	53.0	69
5KP60	5KP60C	60.0	66.70	81.50	5.0	10	107.0	47.0	79
5KP60A	5KP60CA	60.0	66.70	73.70	5.0	10	96.8	52.0	70
5KP64	5KP64C	64.0	71.10	86.90	5.0	10	114.0	44.0	85
5KP64A	5KP64CA	64.0	71.10	78.60	5.0	10	103.0	49.0	75
5KP70	5KP70C	70.0	77.80	95.10	5.0	10	125.0	40.0	93
5KP70A	5KP70CA	70.0	77.80	86.00	5.0	10	113.0	44.0	84
5KP75	5KP75C	75.0	83.30	102.00	5.0	10	134.0	37.0	100
5KP75A	5KP75A	75.0	83.30	92.10	5.0	10	121.0	41.0	90
5KP78	5KP78C	78.0	86.70	106.00	5.0	10	139.0	36.0	104
5KP78A	5KP78CA	78.0	86.70	95.80	5.0	10	126.0	40.0	94
5KP85	5KP85C	85.0	94.40	115.00	5.0	10	151.0	33.0	113
5KP85A	5KP85CA	85.0	94.40	104.00	5.0	10	137.0	36.0	102
5KP90	5KP90C	90.0	100.00	122.00	5.0	10	160.0	31.0	120
5KP90A	5KP90CA	90.0	100.00	111.00	5.0	10	146.0	34.0	109
5KP100	5KP100C	100.0	111.00	136.00	5.0	10	179.0	28.0	134
5KP110	5KP110C	110.0	122.00	149.00	5.0	10	196.0	26.0	147
5KP120	5KP120C	120.0	133.00	163.00	5.0	10	215.0	23.0	158
5KP150	5KP150C	150.0	166.00	204.00	5.0	10	268.0	18.5	200
5KP180	5KP180C	180.0	200.00	244.00	5.0	10	320.0	15.0	240

- Notes:
1. Suffix 'C' denotes bidirectional device. Suffix 'A' denotes 5% tolerance device, no suffix denotes 10% tolerance device.
 2. For bidirectional devices having V_R of 10 volts and under, the I_R limit is doubled.
 3. Type Number marking may contain a "V" or dash in place of decimal point.