



- Series 804 triple row 2,54 grid headers use MM #5016 pins. See page 182 for details.
- Series 805 triple row 2,54 grid sockets use MM #1303 pins. See page 150 for details.
- Series 805 triple row 2,54 grid sockets use Hi-Rel, 6-finger BeCu #47 contacts rated at 4.5 amps. See page 221 for details.
- Insulators are high temp. thermoplastic, suitable for all soldering operations.

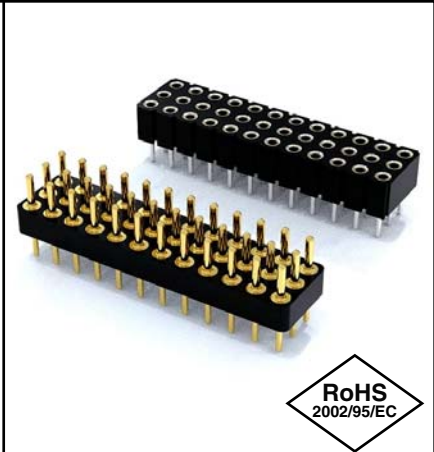

Ordering Information

Fig. 1	Series 804...002	Straight Pin Header
	804-10-0__-10-002000	Specify # of pins \rightarrow 09-96

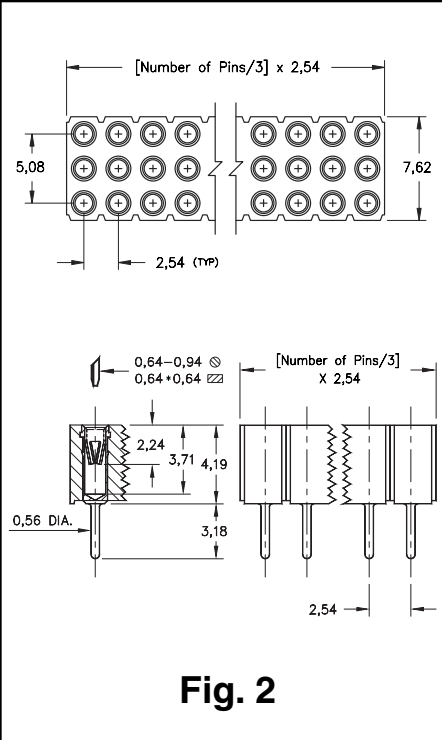

For Electrical, Mechanical & Environmental Data, See pg. 4

For RoHS compliance select \diamond plating code.

PLATING CODE =	10 \diamond			
Pin Plating	0,25 μ m Au			

Fig. 2	Series 805...012	Straight Pin Socket
	805-43-0__-10-012000	Specify # of pins \rightarrow 09-96

For Electrical, Mechanical & Environmental Data, See pg. 4

For RoHS compliance select \diamond plating code.

PLATING CODE =					43 \diamond
Sleeve (Pin)					5,08 μ m Sn
Contact (Clip)					0,76 μ m Au