


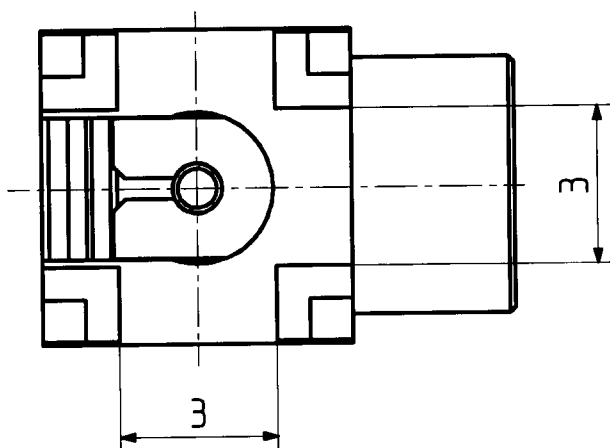
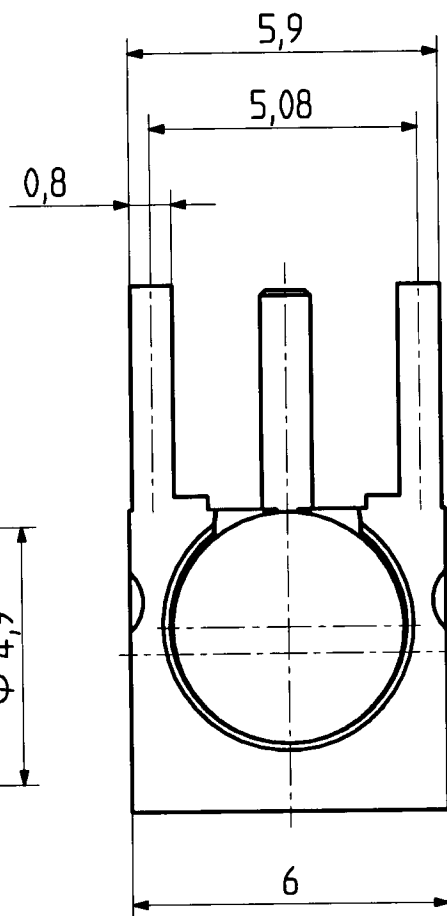


This drawing is copyright. Information contained thereon is supplied in confidence and must not be used for any other purpose than which it was supplied, or be reproduced without written permission of the owners.


Diese Zeichnung ist unser geistiges Eigentum und darf ohne unsere ausdrückliche Einwilligung weder kopiert, vervielfältigt, noch Drittpersonen oder Konkurrenzfirmen zugänglich gemacht werden.

type : 85 MCX-50-0-16

|          | date     | sign    |
|----------|----------|---------|
| drawn    | 07.09.99 | 4540/PM |
| checked  | 7.9.99   | 4587/JL |
| approved | 7.9.99   | 4587/JL |

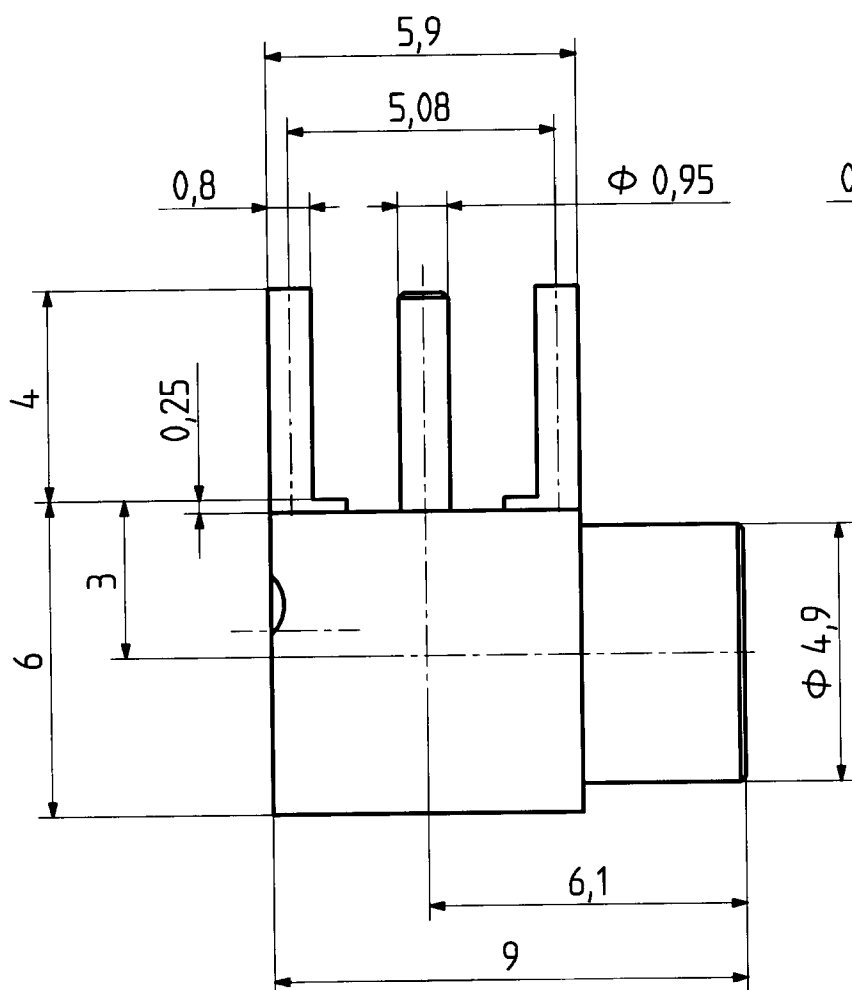


mounting hole  
ML 15

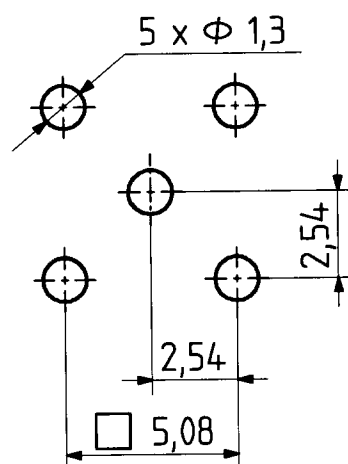

H+S 701 448.05

scale

7:1



HUBER + SUHNER RFX

dimensions in mm

drawing number

4.13.31806

Index

b

OZ drawing : OZ.98.4.13.5326

[RF Products](#)[FO Products](#)[Energy+Signal](#)[Transmission](#)[Polymer Solutions](#)

Search categories

[RF cable connectors](#)[RF panel connectors](#)[RF print connectors](#)[RF adaptors](#)[RF in-series adaptors](#)[RF coaxial cable](#)[RF low-noise cable](#)[RF lightning protector](#)[FO cable connectors](#)[FO adaptors](#)[FO cables](#)**Article number:****Type:****SUHNER Type:****85 MCX-50-0-16 / 111 NH**[Picture](#)

Article Number:

23001545

Series:

MCX

**Electrical Data:**

Impedance:

50  $\Omega$ 

Frequency Range:

DC ... 6.00 GHz

**Material Data:****Material****Surface Plating**

Centre contact:

Copper-Beryllium

Outer contact:

Brass

Gold / nickel underplated

Body:

Brass

Gold / nickel underplated

Insulator:

PTFE/PFA

**General Information:**

Interface according to:

IEC 60169-36\_CECC 22220

Weight:

1.70 g/0.06 oz

Packaging:

Bulk 100 pcs

**Attachment:**

Outline drawing:

[S31806](#)