

Type: RCH114

Product Description


- 10.5mm Max. ϕ , 14.4mm Max. Height.
- Inductance Range: 6.3 μ H ~ 39mH
- Rated current range: 0.09 ~ 4.3A
- In addition to the standard versions of inductors shown here, custom inductors are available to meet your exact requirements.



Feature

- Magnetically unshielded construction.
- Ideally Used in Printers, LCD TV, DVD, Printer, Copy Machine, Mainboard of the compounding machines, etc as Power Supplies's Inductors or DC-DC Converter inductors.
- RoHS Compliance

Dimensions (mm)

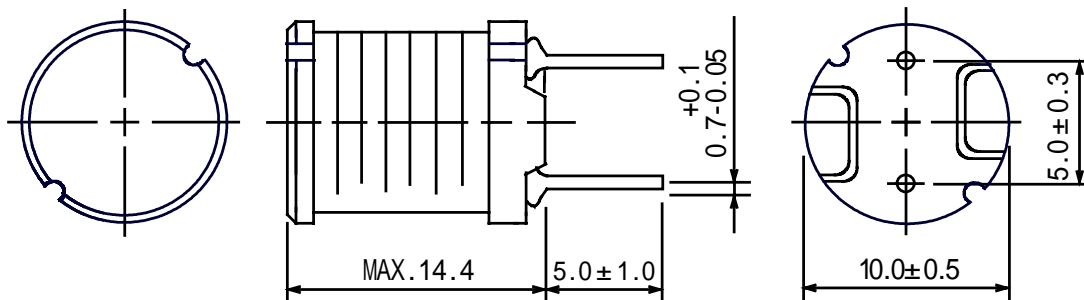

Type: RCH114
Specification

Part Name	Stamp	Inductance (Within) 1	D.C.R.() Max.(Typ.) at 20	Rated Current
				(A) 2
RCH114NP-6R3MB	6R3	6.3 μ H \pm 20 %	26m(20)m	4.3
RCH114NP-7R5MB	7R5	7.5 μ H \pm 20 %	29m(22m)	4.2
RCH114NP-8R8MB	8R8	8.8 μ H \pm 20 %	30m(23m)	4.1
RCH114NP-100KB	100	10 μ H \pm 10 %	33m(25m)	4.0
RCH114NP-120KB	120	12 μ H \pm 10 %	35m(27m)	3.9
RCH114NP-150KB	150	15 μ H \pm 10 %	39m(30m)	3.7
RCH114NP-180KB	180	18 μ H \pm 10 %	47m(36m)	3.5
RCH114NP-220KB	220	22 μ H \pm 10 %	51m(39m)	3.3
RCH114NP-270KB	270	27 μ H \pm 10 %	57m(44m)	3.1
RCH114NP-330KB	330	33 μ H \pm 10 %	64m(49m)	2.9
RCH114NP-390KB	390	39 μ H \pm 10 %	74m(57m)	2.7
RCH114NP-470KB	470	47 μ H \pm 10 %	83m(64m)	2.5
RCH114NP-560KB	560	56 μ H \pm 10 %	104m(80m)	2.3
RCH114NP-680KB	680	68 μ H \pm 10 %	117m(90m)	2.1
RCH114NP-820KB	820	82 μ H \pm 10 %	130m(100m)	1.9
RCH114NP-101KB	101	100 μ H \pm 10 %	143m(110m)	1.7
RCH114NP-121KB	121	120 μ H \pm 10 %	195m(150m)	1.5
RCH114NP-151KB	151	150 μ H \pm 10 %	221m(170m)	1.4
RCH114NP-181KB	181	180 μ H \pm 10 %	0.26(0.20)	1.3
RCH114NP-221KB	221	220 μ H \pm 10 %	0.35(0.27)	1.2
RCH114NP-271KB	271	270 μ H \pm 10 %	0.39(0.30)	1.1
RCH114NP-331KB	331	330 μ H \pm 10 %	0.52(0.40)	1.0
RCH114NP-391KB	391	390 μ H \pm 10 %	0.57(0.44)	0.92
RCH114NP-471KB	471	470 μ H \pm 10 %	0.65(0.50)	0.84
RCH114NP-561KB	561	560 μ H \pm 10 %	0.79(0.61)	0.75
RCH114NP-681KB	681	680 μ H \pm 10 %	0.96(0.74)	0.69
RCH114NP-821KB	821	820 μ H \pm 10 %	1.22(0.94)	0.62
RCH114NP-102KB	102	1.0 mH \pm 10 %	1.6(1.3)	0.52
RCH114NP-122KB	122	1.2 mH \pm 10 %	2.2(1.8)	0.46
RCH114NP-152KB	152	1.5 mH \pm 10 %	2.5(2.0)	0.41
RCH114NP-182KB	182	1.8 mH \pm 10 %	2.9(2.3)	0.36
RCH114NP-222KB	222	2.2 mH \pm 10 %	3.2(2.6)	0.32
RCH114NP-272KB	272	2.7 mH \pm 10 %	3.7(3.0)	0.29
RCH114NP-332KB	332	3.3 mH \pm 10 %	5.0(4.0)	0.27
RCH114NP-392KB	392	3.9 mH \pm 10 %	5.6(4.5)	0.25
RCH114NP-472KB	472	4.7 mH \pm 10 %	7.4(5.9)	0.23
RCH114NP-562KB	562	5.6 mH \pm 10 %	8.2(6.6)	0.21
RCH114NP-682KB	682	6.8 mH \pm 10 %	11.9(9.5)	0.19
RCH114NP-822KB	822	8.2 mH \pm 10 %	14(11)	0.17
RCH114NP-103KB	103	10 mH \pm 10 %	16(13)	0.16
RCH114NP-123KB	123	12 mH \pm 10 %	21(17)	0.15
RCH114NP-153KB	153	15 mH \pm 10 %	24(19)	0.14
RCH114NP-183KB	183	18 mH \pm 10 %	27(22)	0.13
RCH114NP-223KB	223	22 mH \pm 10 %	34(27)	0.12
RCH114NP-273KB	273	27 mH \pm 10 %	39(31)	0.11
RCH114NP-333KB	333	33 mH \pm 10 %	51(41)	0.10
RCH114NP-393KB	393	39 mH \pm 10 %	58(46)	0.09

1: Measuring frequency : 6.3 μ H ~ 8.8 μ H at 7.96 MHz
 1.0 μ H ~ 3.9 mH at 1.0 kHz

2: Rated current: The DC current at which the inductance decreases 90% of its initial value or when $t=40$, whichever is lower($T_a = 20$)