

Color-Keyed®


LOCKTITE® Connectors – Code Copper Conductor (for 600V)



For stranded, solid, flexible and other types of cables, each lug takes a range of wire sizes. Bolt holes and spacings listed are standard, but lugs with blank tongues will be furnished, if specified, without extra charge.

Tandem Type Two-Bolt Hole NEMA Drilled

Cat. No.	Cable Size	Dimensions (in.)							
		G	A	B	C	D	J	F	H
32007TL	4 to 1	3/8	3 9/16	2	3/4	7/32	2 9/32	7/16	1
32009TL	1 to 2/0	1/2	4 15/16	3	1	1/4	1 13/32	9/16	1 3/4
32011TL	2/0 to 4/0	1/2	5 5/8	3	1	9/32	1 5/16	9/16	1 3/4
32013TL	4/0 to 300	1/2	5 5/8	3	1 13/16	5/16	1 1/16	9/16	1 3/4
32015TL	300 to 500	1/2	6 1 1/32	3 1/2	1 3/8	1 1/32	—	5/8	1 3/4
32017TL	500 to 750	1/2	6 23/32	3 1/2	1 3/4	1 3/32	2 1/8	5/8	1 3/4

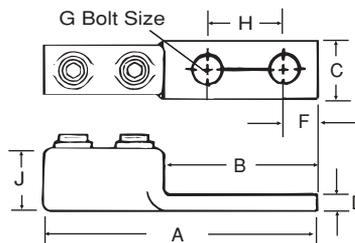

MECHANICAL



For easy installation in hard-to-reach places, these bar taps eliminate the necessity of drilling holes in the ground bus. They can be placed quickly at any location, and the only installing tool is a key wrench. A standard LOCKTITE® lug grip securely holds the tapping cable.

Ground Bus Taps – for 1/4" Copper Bus Bar

Cat. No.	Wire Size (in.)	Dimensions (in.)		Bus Thickness
		A	B	
31207	8 to 4	2 1/4	1 3/4	1/4
31208	4 to 1	2 9/16	1 3/4	1/4
31209	1 to 2/0	2 3/4	1 3/4	1/4
31210	2/0 to 4/0	2 3/4	1 3/4	1/4
31211	4/0 to 300	2 7/8	1 3/4	1/4
31212	300 to 500	3	1 3/4	1/4

For torque requirements see page 190.

