
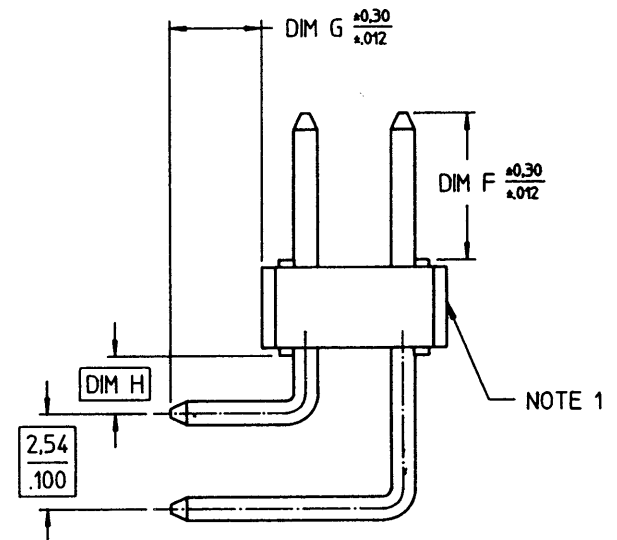
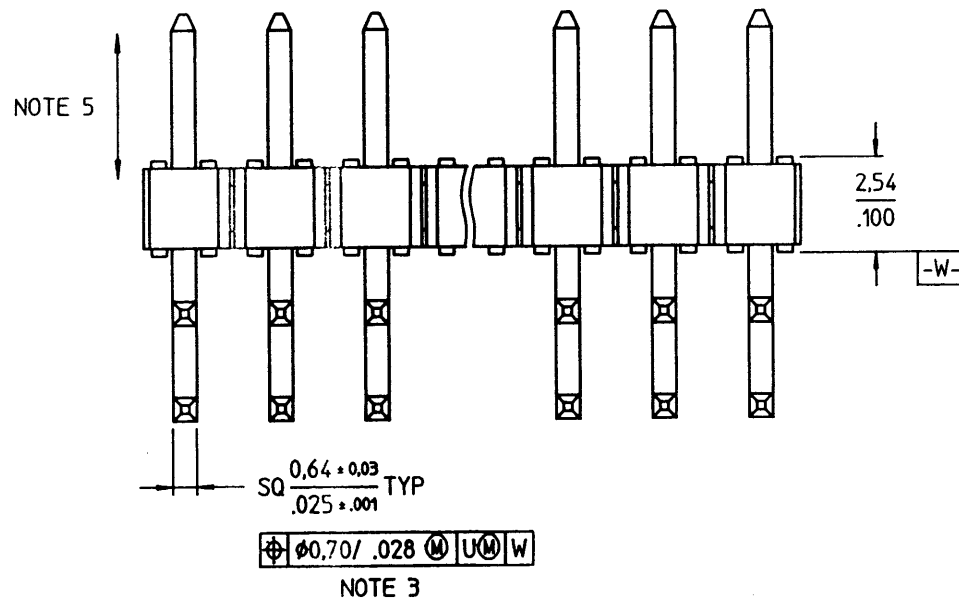






PRODUCT NO  
SEE TABLE

REV	DESCRIPTION	REV'D BY	DATE
A	RLSD LCR S30044	LONG	27SEPT93
B	ECR S30412	LONG	05NOV93
C	ECR S30472	LONG	17DEC93
D	ECR K40044	WW LEE	07NOV94

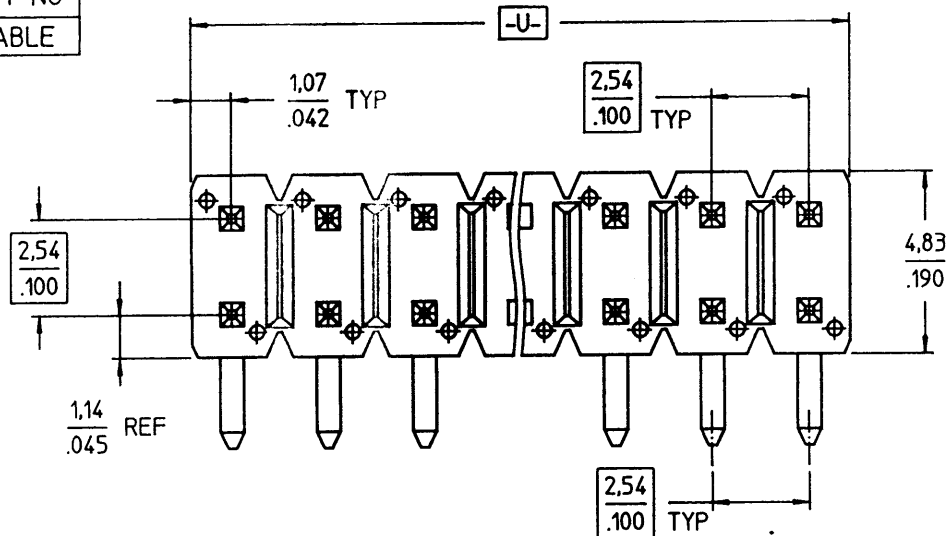

GEN. TOLERANCES		DO NOT SCALE DWG.			
XX $\pm$ 0.3/XX $\pm$ 0.01 XX $\pm$ 0.13/XX $\pm$ 0.005 XX $\pm$ 0.051/XX $\pm$ 0.0020 ANGLES = $\pm 2^\circ$		  			
NAME		DATE		DESCRIPTION  ECON-STIK HEADER .100/2.54 cc D/R R/A	
DRAWN		BK CHUA			
CHECKED		7/11/94			
APPROVED		7/14/94		PRODUCT NO. 92850	
				SCALE	SHT 1 OF 2

CUSTOMER COPY

PRODUCT NO	NO. OF POS.	MATING LENGTH	TAIL LENGTH	BEND LENGTH	PLATING TYPE
		DIM. F	DIM. G	DIM. H	
92850-001-XX	2 THRU 72	5,84 / .230	2,41 / .095	1,52 / .060	2u" Au OVER 50u" Ni
92850-002-XX	2 THRU 72	8,08 / .318	2,41 / .095	1,52 / .060	2u" Au OVER 50u" Ni

REV
A
B
C
D



NOTES :

- ① BODY MATERIAL : 20% MIN. GLASS FILLED NYLON.  
FLAME RETARDANT PER UL-94V-0.  
COLOR : BLACK.
- 2 PIN MATERIAL : BRASS.
- ③ MEASURED WITH PART IN RESTRAINED CONDITION.
- 4 TWO SIDES OF PIN TIPS NOT PLATED. TYPICAL BOTH ENDS.
- ⑤ 2 LBS / 0,9 KG MIN PIN RETENTION IN EITHER DIRECTION.
- 6 PACKAGE IN POLY BAGS PER BUS-14-099.
- 7 PART NO CONSIST OF,

92850-XXX-XX

└── NO OF POSITION  
└── BASE P/NO

CUSTOMER COPY

<b>GEN. TOLERANCES</b> XX±0,3/XX±0,01 X,XX±0,13/X,XX±0,005 X,XXX±0,051/X,XXX±0,0020 ANGLES = ±2°		<b>DO NOT SCALE DWG.</b>  		<b>BERG</b> ELECTRONICS <b>DESCRIPTION</b> ECON-STIK HEADER .100/2,54 cc D/R R/A	
		NAME      DATE BK CHUA    07NOV94			
DRAWN		BK CHUA		PRODUCT NO. 92850	
CHECKED		<i>[Signature]</i>		SCALE	
APPROVED		<i>[Signature]</i>		SHT 2 OF 2	