


ASH-33 Series Pitch 11mm

Specifications


BARRIER MATERIAL: THERMOPLASTIC (UL 94V-0), BLACK
 TERMINALS: TIN PLATED BRASS
 SCREWS: NICKEL PLATED STEEL
 WIRE RANGE AWG: 12-18 STR.
 RATING: 20 AMPERES, 300 VAC
 INSULATION WITHSTANDS VOLTAGE AC 2000
 INSULATION RESISTANCE 500MΩ OR MORE AT DC 500V

MOUNTING END & BARRIER
 END ARE BOTH AVAILABLE


ASH-331

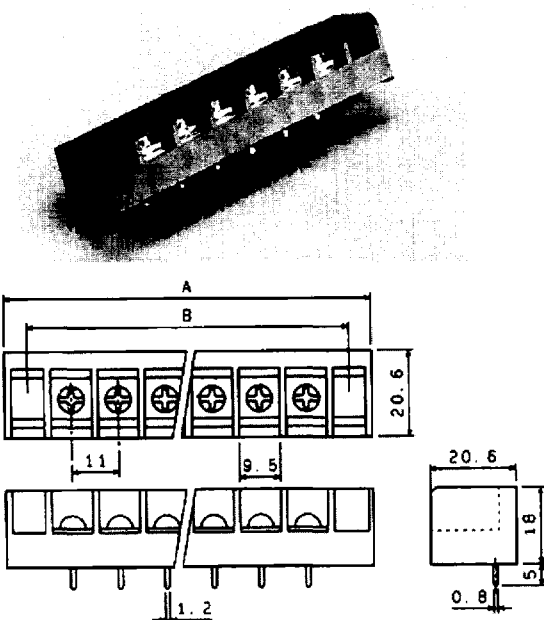


ASH-332

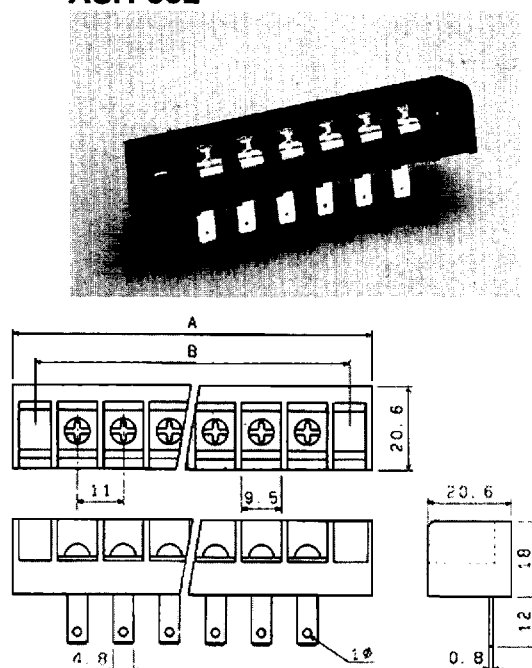

ASH-333


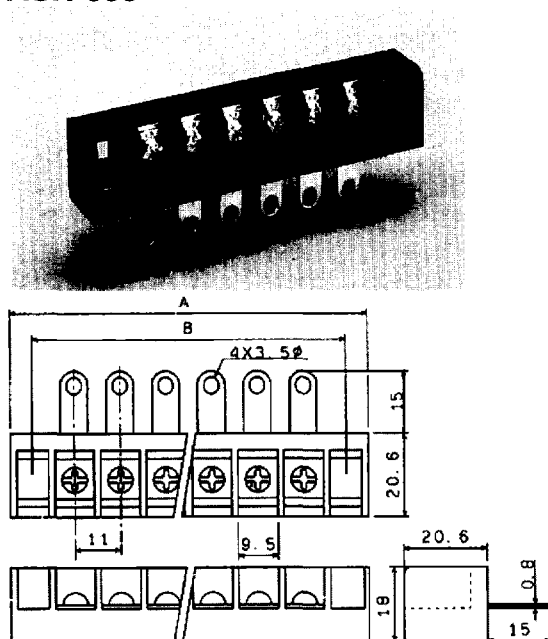


ASH-334

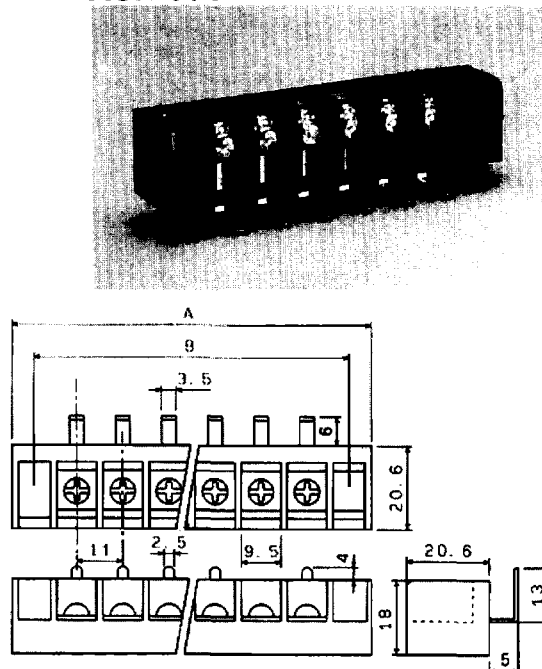

ASH-33 Series Continued....

ASH-335

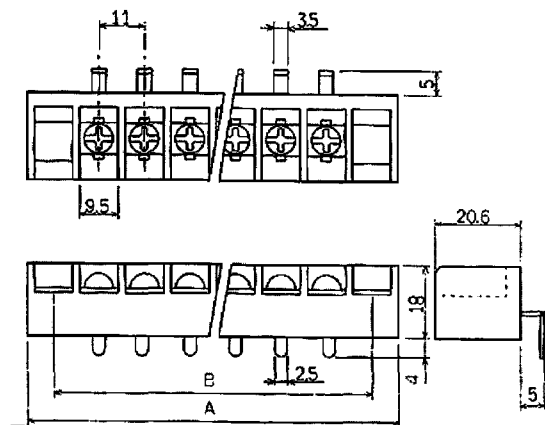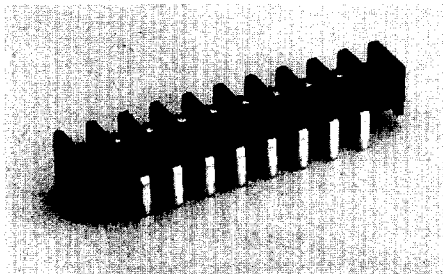

DIMENSION: $\pm 0.8\text{mm/m}$

Pole	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
A	45	57	68	79	89	101	112	123	134	145	156	167	178	189	200	211
B	33	44	55	66	77	88	99	110	121	132	143	154	165	176	187	198

Pole	18	19	20	21	22	23	24	25	26	27	28	29	30
A	222	232	244	254	266	277	288	298	312	322	333	344	355
B	209	220	231	242	253	264	275	286	297	308	319	330	341