




MMS-110-01-L-DP



MMS-116-01-L-SD

(2,00mm) .0787"

MMS-XD, MMS-XP SERIES

BOX CONTACT SOCKET STRIPS

Mates with:
TMM, MTMM, MMT,
LTMM, TW, TCMD

Features:

- Box style connectors on 2mm pitch
- High quality double beam contacts insure performance
- Four styles for pass-through/bottom entry applications
- LCP for high temperature reflow soldering

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?MMS

Insulator Material:
Black Liquid Crystal Polymer
Flammability Rating:
UL 94V-0

Insulation Resistance:
5000 MΩ min

Operating Temp Range:
-55°C to +125°C with Gold
-55°C to +105°C with Tin

Withstanding Voltage:
600 VAC

Contact Material:
Phosphor Bronze

Plating:
Sn or Au over
50μ" (1,27μm) Ni


Contact Resistance:
10 mΩ max

Lead Size Range:
.019" (0,48mm) SQ
to .021" (0,53mm) SQ

RoHS Compliant:
Yes

Lead-Free Solderable:
Yes

Note:
Some sizes, styles and options are non-standard, non-returnable.

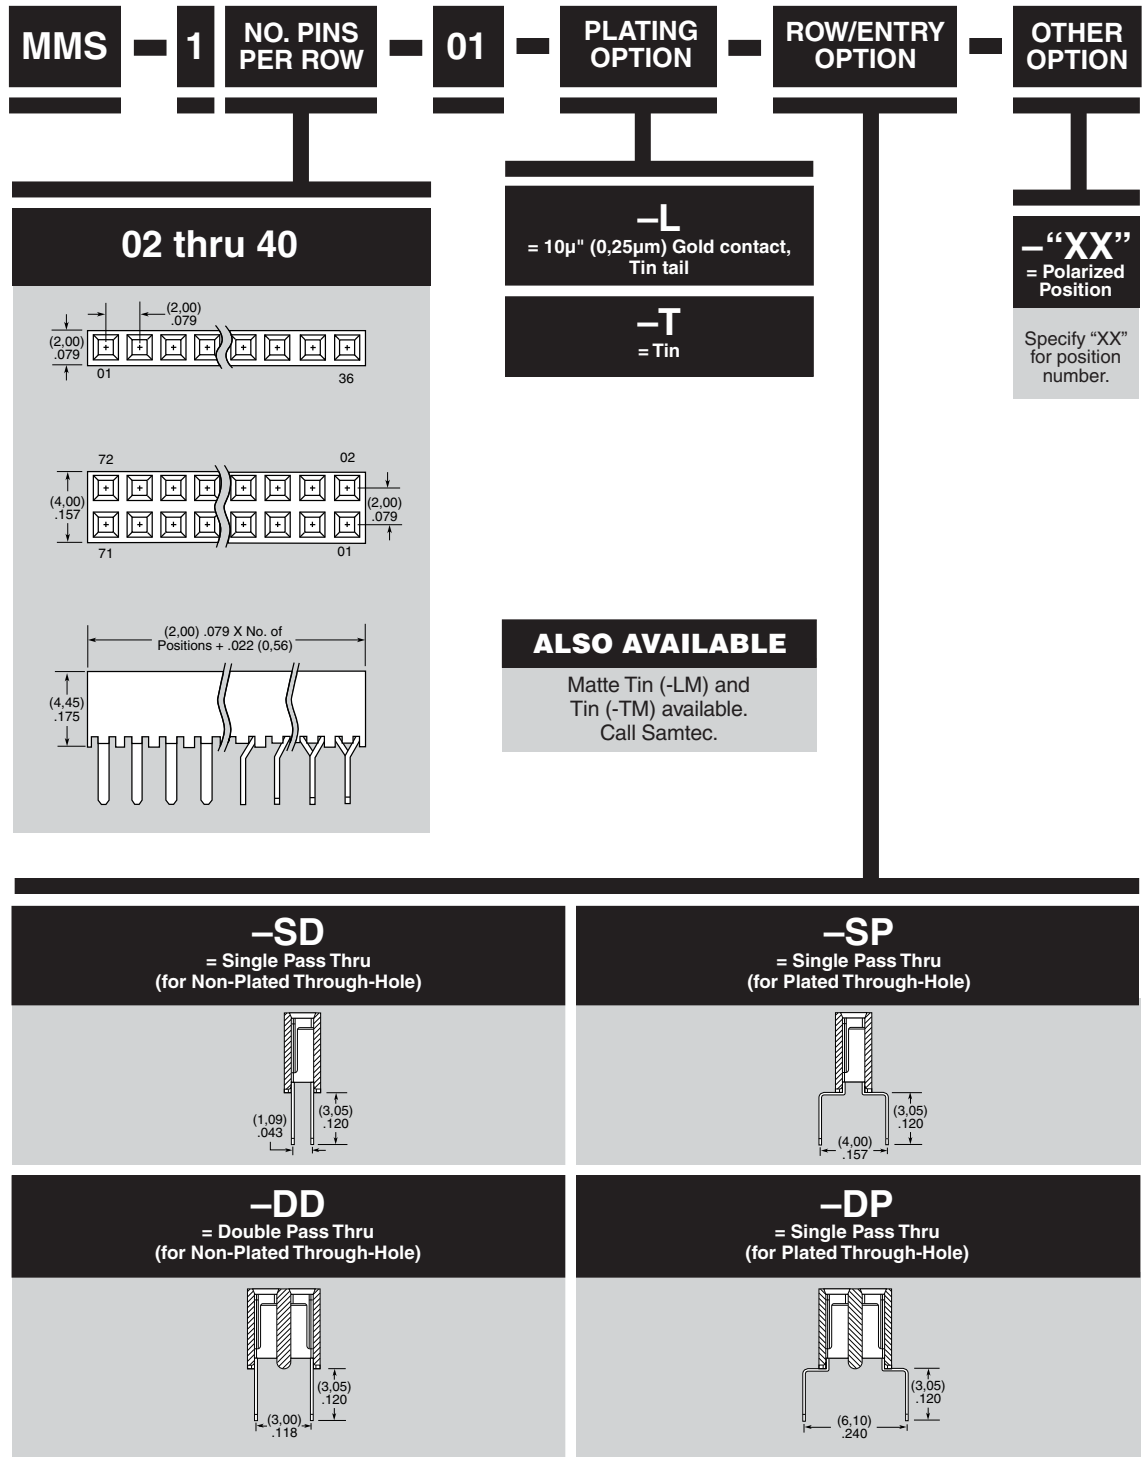

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM