

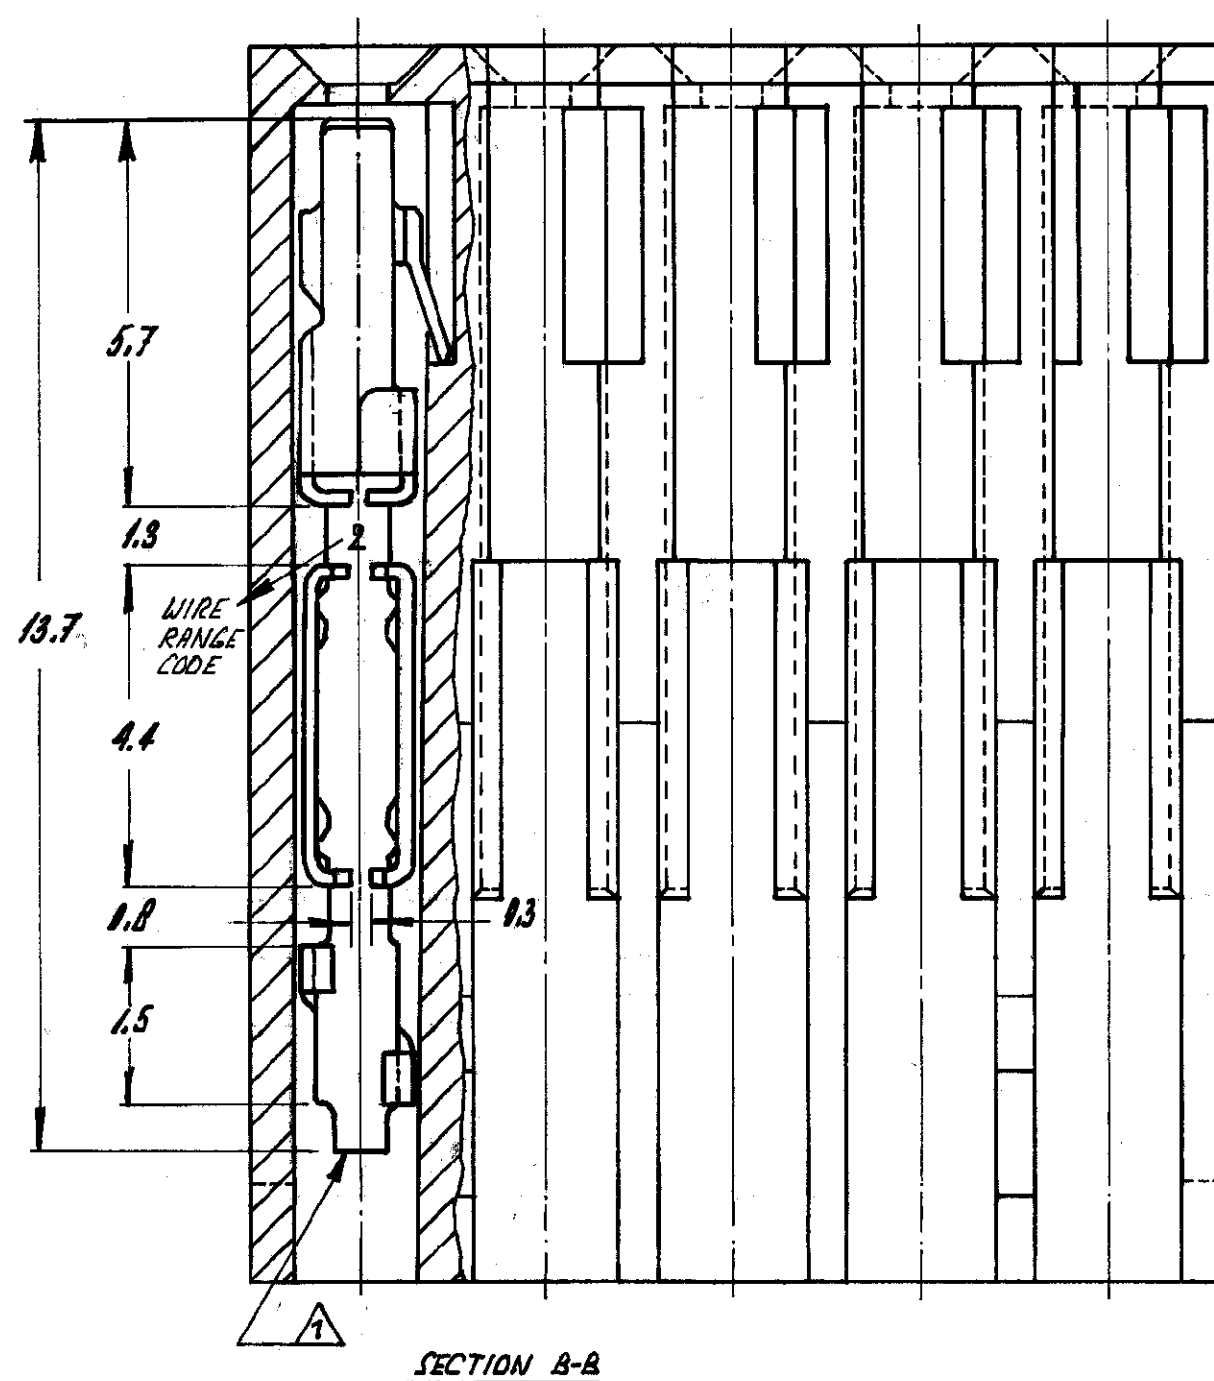


USED ON

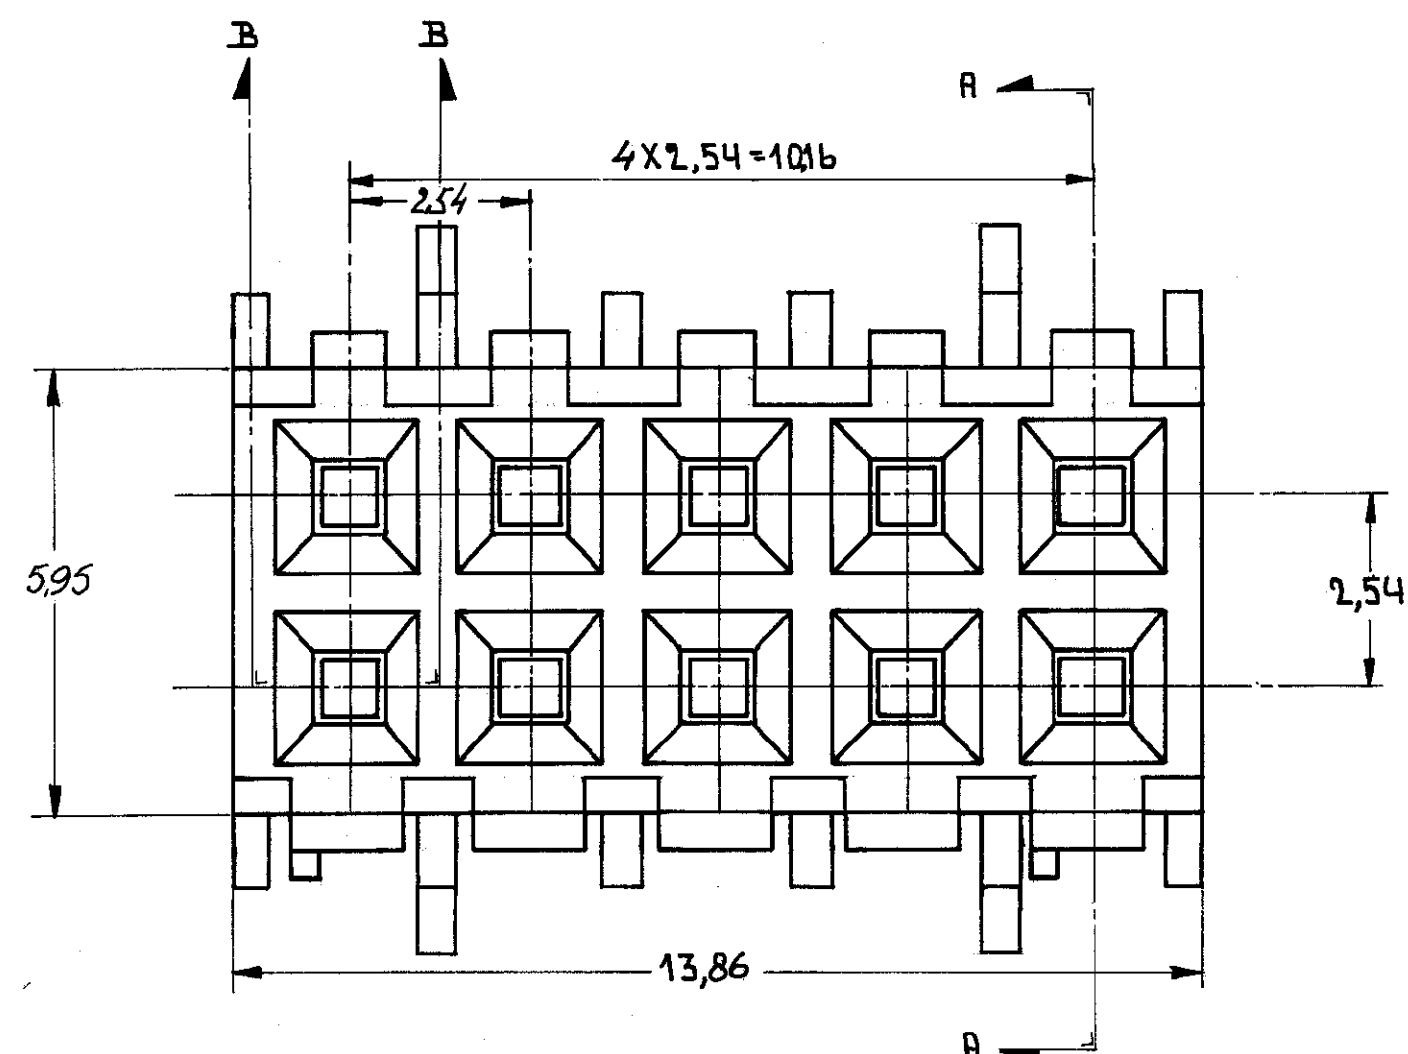

SECTION B-B

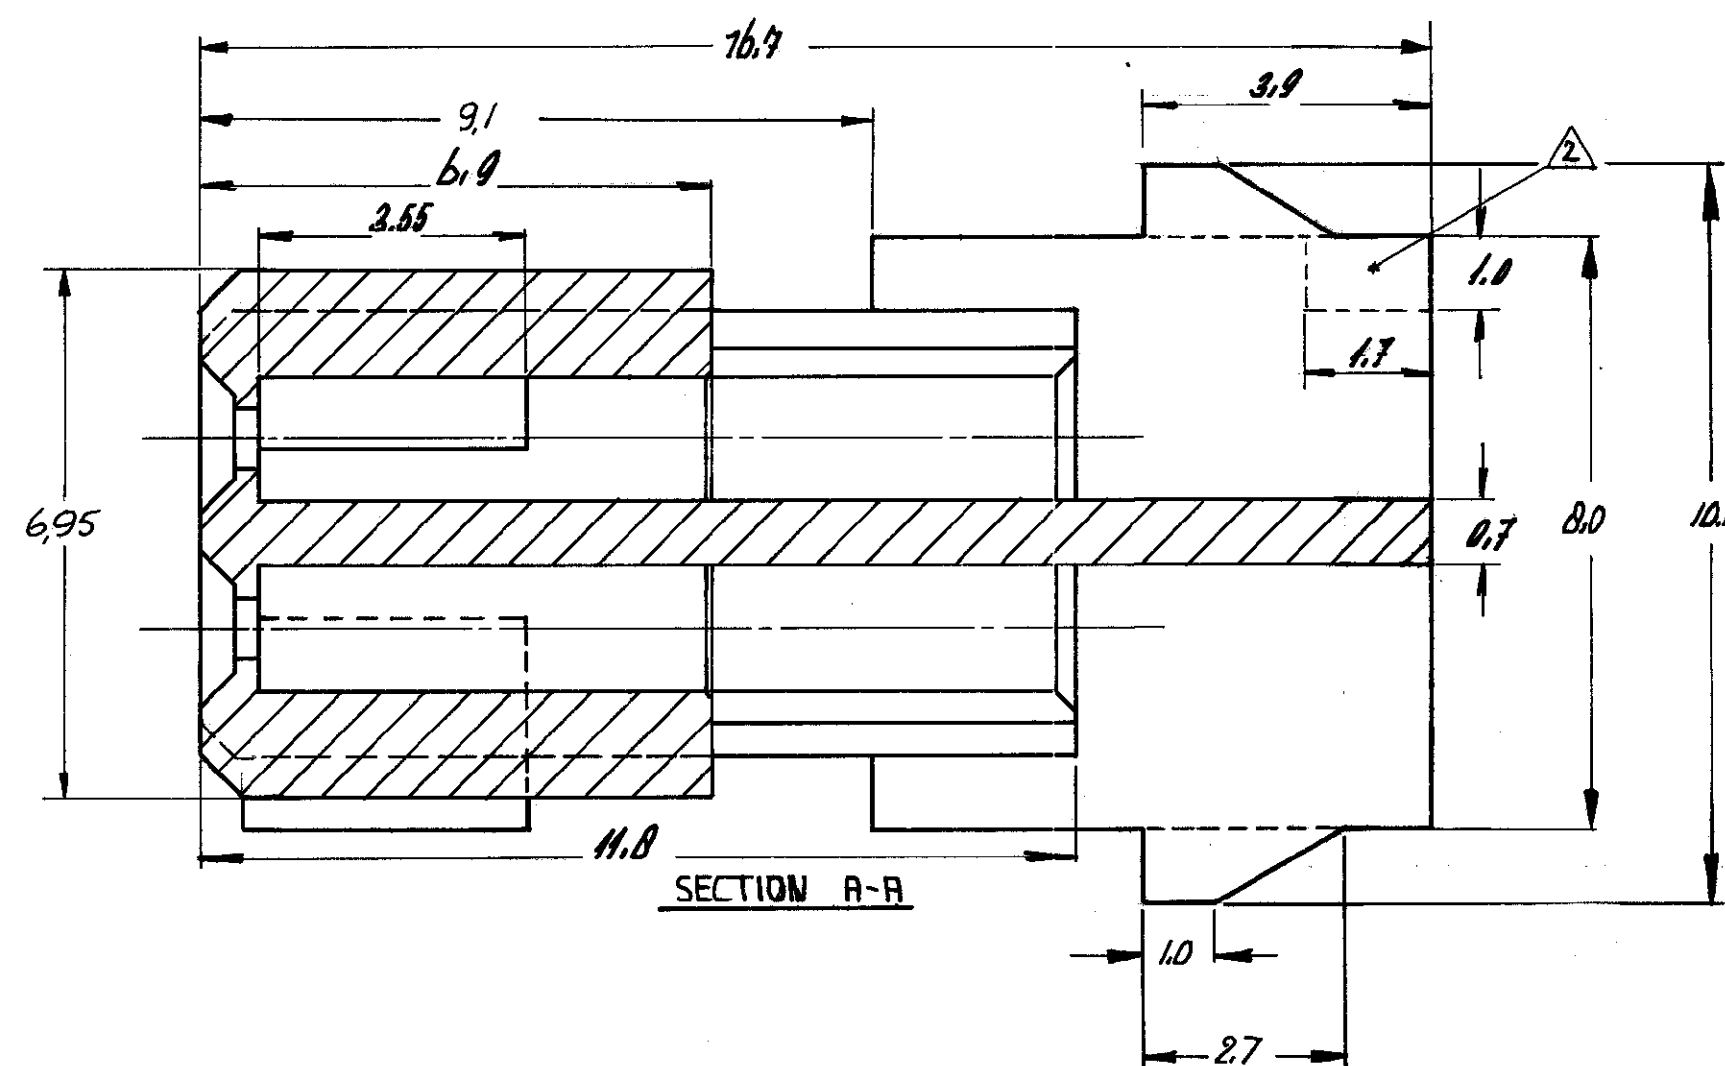

SECTION A-A

NOTES:

- 1 ALL CAVITIES LOADED WITH CONTACTS, ONE CONTACT SHOWN ONLY.
- 2 TWO POLARISING-OPENINGS FOR COVER, ONLY IN OUTER WALLS AT SIDE OF NARROW RIBS ONLY.
- 3 CONNECTOR MARKED WITH DATE-CODE.
- 4 CONNECTOR PRINTED WITH DATE CODE, WIRE SIZE AND GOLDPLATING THICKNESS.
- 5 PLATING SAME AS -1, ONLY 1.3 μm Au OVER 1.25 μm Ni.
- 6 PLATING SAME AS -1, ONLY 1.0 μm Au OVER 1.25 μm Ni.

2-166502-6	1	SAME AS -6
2-166502-5	1	SAME AS -5
166502-6		SEE NOTE 1
166502-5		SEE NOTE 1
166502-4		SAME AS -1, ONLY 1.25 μm Au
166502-3	3	SAME AS -1, ONLY 2.0 μm Au
166502-2		
166502-1		
ORDER NO.		MATERIAL
		PLATING

HOUSING:
THERMOPLASTIC
POLYESTER
COLOUR: GREY

CONTACTS:
PHOSPHOR BRONZE

CONTACT AREA:
0.8 μm Au OVER 0.8 μm Ni.
TERMINATION AREA:
SNIP OVER 0.8 μm Ni.

CUSTOMER COPY FOR REFERENCE ONLY

DR L. VAN DER HEYDEN	DATE	©1980 BY AMP-HOLLAND N.V. ALL RIGHTS RESERVED A-MP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.		AMP AMP-HOLLAND N.V. 's-Hertogenbosch
CHK 15/8-80	DATE	WIRE-RANGE	INSUL-RANGE	
DE	DATE	SCALE 1D:1	SIZE C	NO C-166502
APP 15/8-80	DATE	NAME 2x5 POS. M.T. CABLE CONNECTOR AWG 26-22		

Click to activate links to all other products

Wire Termination Type:	IDC
Housing Material:	Thermoplastic Polyester
Housing Flammability Rating:	UL 94V-0
Rows Loaded:	Fully Loaded

Wire Range (mm [AWG]):	0.15-0.3² [26-22]
Contact Type:	MT (IDC)
Contact Mating Area Plating:	Gold (30) over Nickel (50)
Contact Material:	Copper Tin
Color:	Gray

[Copyright](#) and [Privacy Statement](#)

Visit [Tyco International, Ltd.](#)

[Products](#) | [Brands](#) | [Industries](#) | [Customer Service](#) | [About](#) | [Home](#)