
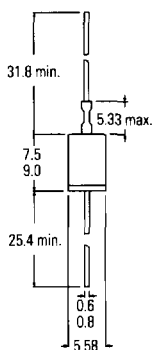


1N6036 - 1N6072A
Series



All dimensions in mm

Invisible Protection

When no problems exist, Crydom TVS Diodes are totally invisible to the circuits they're protecting. But when potentially damaging transients occur, they provide high-speed "clamping" to prevent damage – and then return to their electronically invisible state.

1N60 SERIES (1500 WATT) METAL AXIAL TRANSIENT VOLTAGE SUPPRESSORS
(hermetically sealed package for harsh industrial environments)

FEATURES

- Glass passivated junction
- Stand-off voltage range: 6.8-200 V
- Excellent clamping capability
- Low zener impedance
- 100% surge tested
- -65°C to +175°C
- Hermetically sealed
- Bi-directional

MAXIMUM RATINGS

- Peak pulse power (PPK): 1500 watts (10 X 1000 μ s)
- 1 watt steady state
- Response time: 1×10^{-12} s (theoretical)
- Operating and storage temperature: -55°C to +175°C

MECHANICAL CHARACTERISTICS

- Case: Metal hermetically sealed DO-13 package
- Terminals: Axial leads, solderable per MIL-STD-202 Method 208
- Weight: 1.5 grams (approx.)

Transient Voltage Suppression (TVS) Diodes

1N6036 – 1N6072A Series

PART NUMBER	REVERSE STAND-OFF VOLTAGE V _R (V)	BREAKDOWN VOLTAGE V _{BR} (V) @ I _R			MAXIMUM REVERSE LEAKAGE I _R @ V _R (µA)	MAXIMUM CLAMPING VOLTAGE V _C @ I _{PP} (V)	MAXIMUM PEAK PULSE CURRENT I _{PP} (A)	MAX. VOLTAGE TEMPERATURE VARIATION OF V _{BR} (mV/°C)
		MIN.	MAX.	(mA)				
*1N6036	5.5	6.75	8.25	10.0	1000.0	11.7	128.0	5.0
*1N6036A	6.0	7.13	7.88	10.0	1000.0	11.3	132.0	5.0
*1N6037	6.5	7.38	9.02	10.0	500.0	12.5	120.0	5.0
*1N6037A	7.0	7.79	8.61	10.0	500.0	12.1	124.0	5.0
1N6038	7.0	8.19	10.0	1.0	200.0	13.8	109.0	7.0
1N6038A	7.5	8.65	9.55	1.0	200.0	13.4	112.0	7.0
1N6039	8.0	9.0	11.0	1.0	50.0	15.0	100.0	7.0
1N6039A	8.5	9.5	10.5	1.0	50.0	14.5	103.0	7.0
1N6040	8.5	9.9	12.1	1.0	10.0	16.2	93.0	8.0
1N6040A	9.0	10.5	11.6	1.0	10.0	15.6	96.0	8.0
*1N6041	9.0	10.8	13.2	1.0	5.0	17.3	87.0	9.0
*1N6041A	10.0	11.4	12.6	1.0	5.0	16.7	90.0	9.0
1N6042	10.0	11.7	14.3	1.0	5.0	19.0	79.0	10.0
1N6042A	11.0	12.4	13.7	1.0	5.0	18.2	82.0	10.0
1N6043	11.0	13.5	16.5	1.0	5.0	22.0	68.0	11.0
1N6043A	12.0	14.3	15.8	1.0	5.0	21.2	71.0	12.0
1N6044	12.0	14.4	17.6	1.0	5.0	23.5	64.0	12.0
1N6044A	13.0	15.2	16.8	1.0	5.0	22.5	67.0	13.0
*1N6045	14.0	16.2	19.8	1.0	5.0	26.5	56.5	14.0
*1N6045A	15.0	17.1	18.9	1.0	5.0	25.2	59.5	15.0
1N6046	16.0	18.0	22.0	1.0	5.0	29.1	51.5	17.0
1N6046A	17.0	19.0	21.0	1.0	5.0	27.7	54.0	18.0
1N6047	17.0	19.8	24.2	1.0	5.0	31.9	47.0	19.0
1N6047A	18.0	20.9	23.1	1.0	5.0	30.6	49.0	20.0
1N6048	19.0	21.6	26.4	1.0	5.0	34.7	43.0	24.0
1N6048A	20.0	22.8	25.2	1.0	5.0	33.2	45.0	24.0
*1N6049	21.0	24.3	29.7	1.0	5.0	39.1	38.5	27.0
*1N6049A	22.0	25.7	28.4	1.0	5.0	37.5	40.0	28.0
1N6050	24.0	27.0	33.0	1.0	5.0	43.5	34.5	36.0
1N6050A	25.0	28.5	31.5	1.0	5.0	41.4	36.0	31.0
*1N6051	26.0	29.7	36.3	1.0	5.0	47.7	31.5	32.0
*1N6051A	28.0	31.4	34.7	1.0	5.0	45.7	33.0	34.0
1N6052	29.0	32.4	39.6	1.0	5.0	52.0	29.0	36.0
1N6052A	30.0	34.2	37.8	1.0	5.0	49.9	30.0	37.0
1N6053	31.0	35.1	42.9	1.0	5.0	56.4	26.5	39.0
1N6053A	33.0	37.1	41.0	1.0	5.0	53.9	28.0	40.0
*1N6054	34.0	38.7	47.3	1.0	5.0	61.9	24.0	44.0

*Preferred voltages.

Note: Suffix "A" denotes 5% tolerance device. No suffix denotes 10% tolerance device. Electrical specifications @ 25°C.

1N6036 – 1N6072A Series


PART NUMBER	REVERSE STAND-OFF VOLTAGE V_R (V)	BREAKDOWN VOLTAGE V_{BR} (V) @ I_R			MAXIMUM REVERSE LEAKAGE I_R @ V_R (μ A)	MAXIMUM CLAMPING VOLTAGE V_C @ I_{PP} (V)	MAXIMUM PEAK PULSE CURRENT I_{PP} (A)	MAX. VOLTAGE TEMPERATURE VARIATION OF V_{BR} (mV/°C)
		MIN.	MAX.	(mA)				
*1N6054A	36.0	40.9	45.2	1.0	5.0	59.3	25.3	43.0
*1N6055	38.0	42.3	51.7	1.0	5.0	67.8	22.2	49.0
*1N6055A	40.0	44.7	49.4	1.0	5.0	64.8	23.2	47.0
*1N6056	41.0	45.9	56.1	1.0	5.0	73.5	20.4	53.0
*1N6056A	43.0	48.5	53.6	1.0	5.0	70.1	21.4	51.0
1N6057	45.0	50.4	61.6	1.0	5.0	80.5	18.6	58.0
1N6057A	47.0	53.2	58.8	1.0	5.0	77.0	19.5	56.0
*1N6058	48.0	55.8	68.2	1.0	5.0	89.0	16.9	64.0
*1N6058A	53.0	58.9	65.1	1.0	5.0	85.0	17.7	62.0
*1N6059	55.0	61.2	74.8	1.0	5.0	98.0	15.3	70.0
*1N6059A	58.0	64.6	71.4	1.0	5.0	92.0	16.3	68.0
1N6060	60.0	67.5	82.5	1.0	5.0	108.0	13.9	77.0
1N6060A	64.0	71.3	78.8	1.0	5.0	103.0	14.6	75.0
*1N6061	66.0	73.8	90.2	1.0	5.0	118.0	12.7	84.0
*1N6061A	70.0	77.9	86.1	1.0	5.0	113.0	13.3	82.0
1N6062	73.0	81.9	100.0	1.0	5.0	131.0	11.4	90.0
1N6062A	75.0	86.5	95.5	1.0	5.0	125.0	12.0	86.0
*1N6063	81.0	90.0	110.0	1.0	5.0	144.0	10.4	99.0
*1N6063A	82.0	95.0	105.0	1.0	5.0	137.0	11.0	94.0
1N6064	90.0	99.0	121.0	1.0	5.0	158.0	9.5	109.0
1N6064A	94.0	105.0	116.0	1.0	5.0	152.0	9.9	104.0
1N6065	95.0	108.0	132.0	1.0	5.0	173.0	8.7	120.0
1N6065A	100.0	114.0	126.0	1.0	5.0	165.0	9.1	115.0
1N6066	105.0	117.0	143.0	1.0	5.0	187.0	8.0	131.0
1N6066A	110.0	124.0	137.0	1.0	5.0	179.0	8.4	125.0
1N6067	121.0	135.0	165.0	1.0	5.0	215.0	7.0	142.0
1N6067A	128.0	143.0	158.0	1.0	5.0	207.0	7.2	136.0
1N6068	137.0	153.0	187.0	1.0	5.0	258.0	5.8	164.0
1N6068A	145.0	162.0	179.0	1.0	5.0	245.0	6.1	157.0
*1N6069	145.0	162.0	198.0	1.0	5.0	274.0	5.5	175.0
*1N6069A	150.0	171.0	189.0	1.0	5.0	261.0	5.7	167.0
1N6070	155.0	171.0	210.0	1.0	5.0	292.0	5.1	186.0
1N6070A	160.0	181.0	200.0	1.0	5.0	278.0	5.4	188.0
*1N6071	165.0	180.0	220.0	1.0	5.0	308.0	4.9	197.0
*1N6071A	170.0	190.0	210.0	1.0	5.0	294.0	5.1	188.0
1N6072	175.0	198.0	242.0	1.0	5.0	344.0	4.3	219.0
1N6072A	185.0	209.0	231.0	1.0	5.0	328.0	4.6	209.0

Transient Voltage Suppression (TVS) Diodes

1N6036 – 1N6072A Series




Peak Power Derating Curve
Peak Pulse Power in Percentage of 25°C Rating



Percentage peak pulse power plotted against ambient temperature

Continuous DC Power Derating Curve
Continuous DC Power Dissipation



Continuous DC power dissipation plotted against junction temperature

Specify Crydom

...for these industry-leading components and products:

- **Solid State Relays**
 - Printed Circuit Board Mount
 - Panel Mount
 - DIN Rail Mount
- **Power Cubes**
- **I/O Modules**
- **Transient Voltage Suppression Components**
 - TVS Diodes
 - Thyristor Suppression Devices
 - Gas Discharge Tubes (GDT)
 - Zeners/Studs
 - Hybrid Arrester Devices

Ordering Information

For recommended applications and more information contact:

Sales: 1-877-502-5500

Technical support: 1-877-702-7700

Corporate Headquarters: 1-619-715-7200


Fax: 1-619-715-7280

E-mail: sales@crydom.com

Website: www.crydom.com

About Crydom

Over the years Crydom has become the supplier of choice for advanced, high-quality products like those featured here. It's the result of our teams of design and production engineers – material, production control, and quality assurance experts, and more – working seamlessly together to create, produce, and deliver superior components and products that satisfy the most demanding environmental and performance requirements. We focus on timely delivery and competitive pricing aimed at meeting your needs and helping you succeed in today's fast-paced, fast-changing global markets.



FASTFAX Product Info: 1-888-267-9191

Crydom

9525 Chesapeake Drive
San Diego, CA 92123 USA



©1998 Crydom
Specifications subject to change without notice.