




























Terminal Strips, with Push-buttons on one or both Sides, with Fixing Flanges or Snap-in Mounting Feet, Series 261

Side-entry



CAGE CLAMP®
CONNECTION





3
19

	0.08 – 2.5 mm² 500 V/6 kV/3 ① 24 A Pole width 6 mm / 0.236 in  8 – 9 mm / 0.33 in *            	2 x 0.08 – 2.5 mm² 500 V/6 kV/3 ① 24 A Pole width 10 mm / 0.394 in  8 – 9 mm / 0.33 in *            
	AWG 28 – 14 300 V, 15 A 300/600 V, 10/5 A ②	2 x AWG 28 – 14 300 V, 15 A 300/600 V, 10/5 A ②

- ① 500 V = rated voltage
6 kV = rated surge voltage
3 = pollution degree
(see also Section 10)
- ② For longer strips and/or assemblies of different colors, please see form on page 3.50.
- ③ For item-No. and packing-unit, see page 3.17
- ④ Suitable for EEx i-applications with blue insulating housings

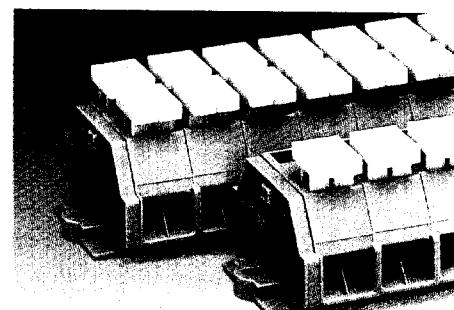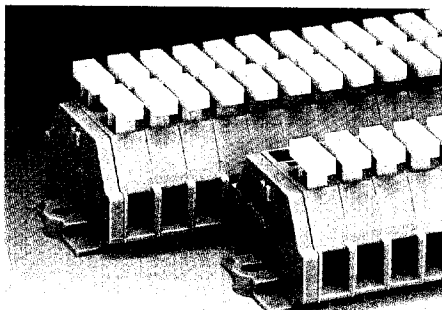

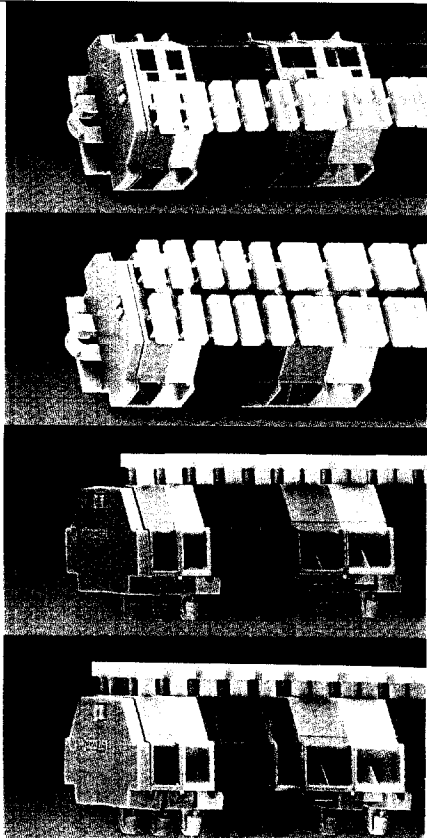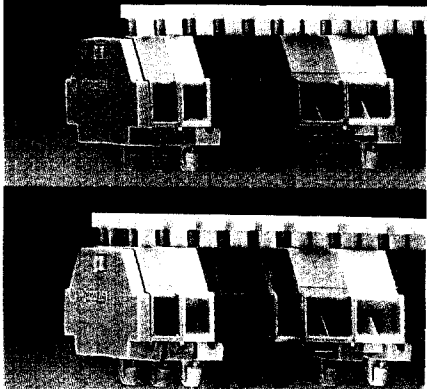Description	No. of poles Add. item-No. for	No. of poles Add. item-No. for
	2-conductor terminal strips with fixing flanges, for screw fixing or similar methods, fixing hole diameter 3.2 mm (with mounting adapter 209-123 also for DIN 35 rail) with push-buttons on one side, grey	4-conductor terminal strips with fixing flanges, for screw fixing or similar methods, fixing hole diameter 3.2 mm (with mounting adapter 209-123 also for DIN 35 rail) with push-buttons on one side, grey
	2 – 12 ② 261-.../331-000 ③	2 – 12 ② 261-.../332-000 ③
	with push-buttons on both sides, grey	with push-buttons on both sides, grey
	2 – 12 ② 261-.../341-000 ③	2 – 12 ② 261-.../342-000 ③
	2-conductor terminal strips with snap-in mounting feet, for plate thickness 0.6 – 1.2 mm, fixing hole diameter 3.5 mm (fits aluminum rail 210-154 or with mounting adapter 209-120 for DIN 35 rail) with push-buttons on one side, grey	4-conductor terminal strips with snap-in mounting feet, for plate thickness 0.6 – 1.2 mm, fixing hole diameter 3.5 mm (fits aluminum rail 210-154 or with mounting adapter 209-120 for DIN 35 rail) with push-buttons on one side, grey
	2 – 12 ② 261-.../331-000 ③	2 – 12 ② 261-.../332-000 ③
	with push-buttons on both sides, grey	with push-buttons on both sides, grey
	2 – 12 ② 261-.../341-000 ③	2 – 12 ② 261-.../342-000 ③

Modular terminal blocks and terminal strips with fixing flanges



L = No. of poles x pole width
L₁ = L + 8.1 mm
L₂ = L + 14.5 mm

Additional item-Nos. for colored terminal strips
blue .../000-006 ①

Modular terminal blocks and terminal strips with snap-in mounting feet

④ End terminal block; see page 3.18 and example of an assembly on page 3.51.

L = (No. of poles x pole width) + 4.4 mm

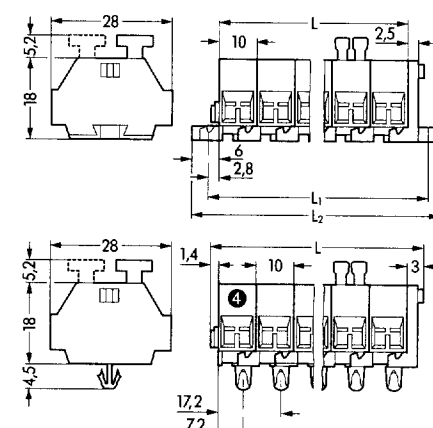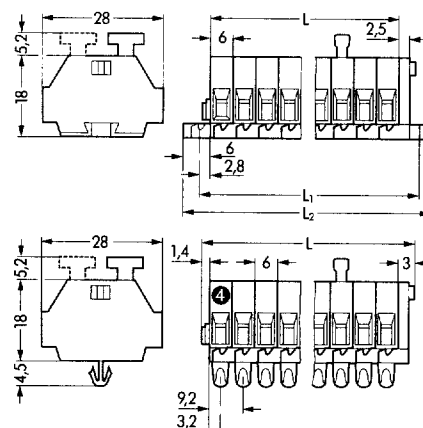

WAGO