

4-Pin Straight Mini Cordset


Specifications

Coupling Nut	Epoxy-Coated Zinc
Connector	Molded oil-resistant PVC
Contacts	Gold-plated palladium/nickel
Cable	Oil-resistant yellow PVC jacket, 18AWG stranded copper, 300V, UL recognized and CSA certified
Cable O.D.	4/c = 7.4mm (0.29in) 5/c = 7.4mm (0.29in)
Temperature	-20°C to +105°C (-4°F to +221°F)

Features


- UL recognized and CSA certified
- General purpose 18AWG cable
- Highly visible yellow PVC jacket offers good oil and chemical resistance
- One-piece molded body design
- Ratcheting coupling nut for vibration resistance

Dimensions—mm (in)

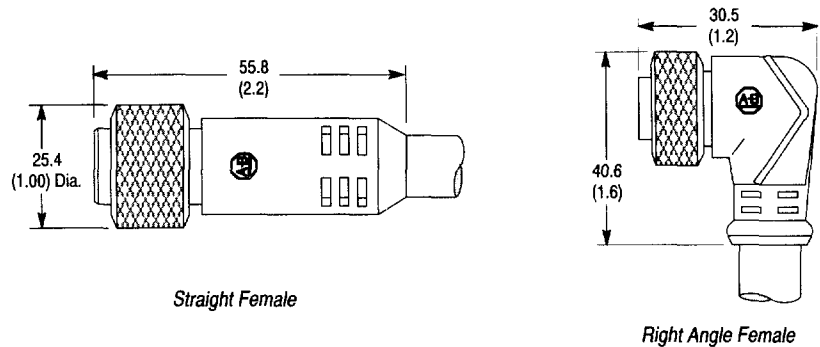

Dimensions are approximate. Illustrations are not drawn to scale.

Selection Guide



Female Connector (Sensor End)		Cable			Catalog Number
Face View of Female	Connector Style	Wire Color	Wire Rating	Length—m (ft)	
	Straight	1 Green 2 Red/Black Tr 3 Red/White Tr	18AWG 300V 3A	1.8 (6)	889N-F3AEA-6F
				3.7 (12)	889N-F3AEA-12F
				6.1 (20)	889N-F3AEA-20F
	Straight	1 Black 2 Blue 3 Brown 4 White	18AWG 300V 3A	1.8 (6)	889N-F4AE-6F
				3.7 (12)	889N-F4AE-12F
	Right Angle			6.1 (20)	889N-F4AE-20F
				1.8 (6)	889N-R4AE-6F
	3.7 (12)			889N-R4AE-12F	
	6.1 (20)			889N-R4AE-20F	
	Straight	1 Black 2 Blue 3 Grey 4 Brown 5 White	18AWG 300V 3A	1.8 (6)	889N-F5AE-6F
				3.7 (12)	889N-F5AE-12F
				6.1 (20)	889N-F5AE-20F
	Right Angle			1.8 (6)	889N-R5AE-6F
				3.7 (12)	889N-R5AE-12F
				6.1 (20)	889N-R5AE-20F