MICRO SWITCH
a Honeywell Division

FED.MFG.CODE 91929

ASSEMBLY- 13AT189-T2

CATALOG LISTING

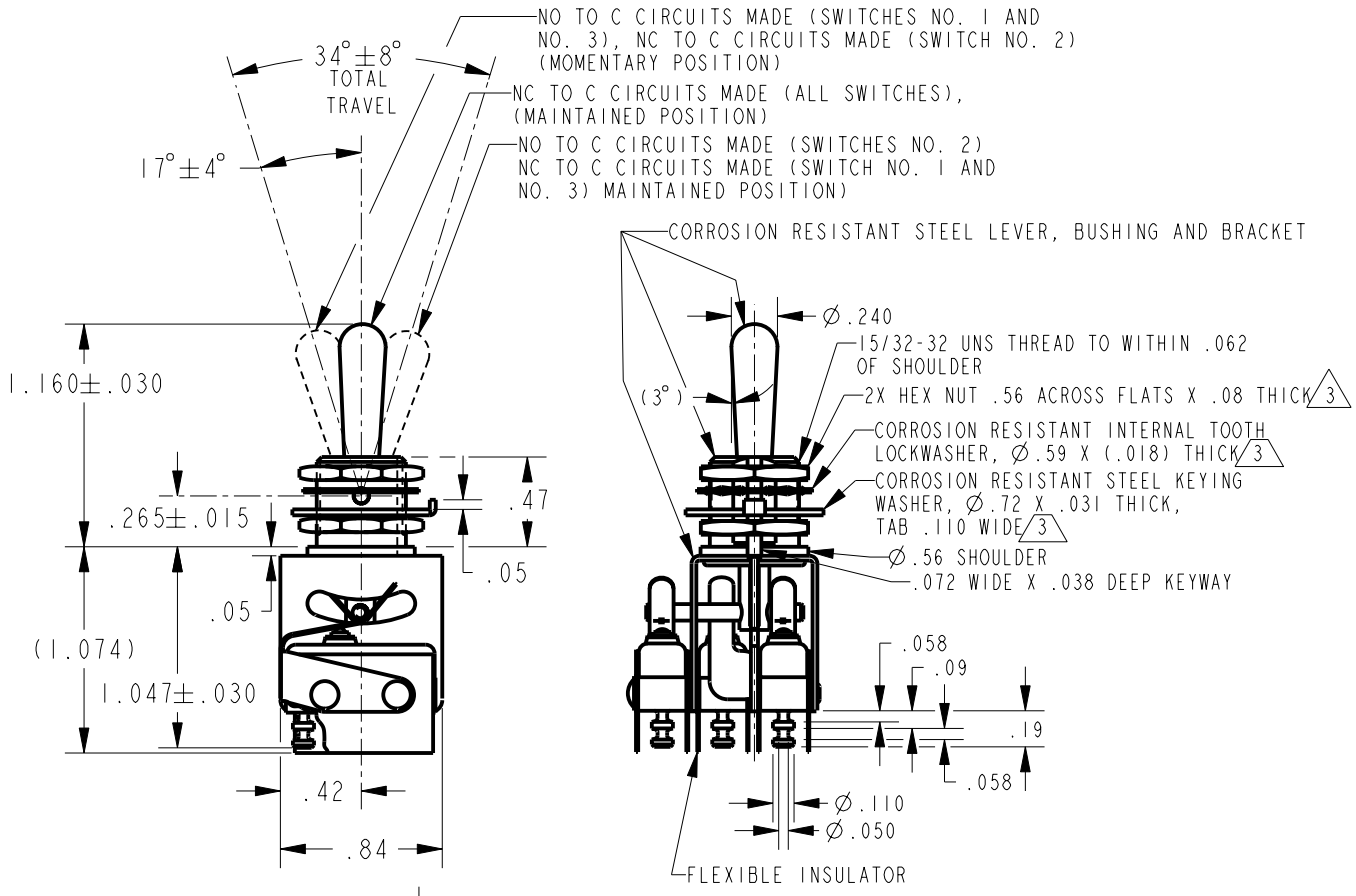

NOTE:
1 - UNIT INCLUDES CAT. LIST. 21SM284-T2 (MS25085-2) BASIC SWITCH 3X
2 - TERMINALS ARE PLATED FOR SOLDERING
3 - HARDWARE MAY BE FURNISHED ASSEMBLED WITH SWITCH OR IN PACKET PER MIL-PRF-8805
4 - REPLACEMENTMOUNTING HARDWARE PACKET 15PA312-AT

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T (3)

	SEA LEVEL		50,000 FT
LOAD	28 VDC	115 VAC	28 VDC
RESISTIVE	5	5	2.5
INDUCTIVE	3	5	2.5
LAMP	2.4	1.5	2.4

SCALE FULL — DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.0)	±.030
TWO PLACE (.00)	±.015
THREE PLACE (.000)	±.005
ANGLES	±

WEIGHT

REVISIONS

A	206069	GLH 29JUL02

CATALOG LISTING 13AT189-T2 PAGE 1 OF 1 — ISSUE 7 — RELEASE NO. PR-15691 — REPLACES -

DRAWN	GLH	29JUL02
CHECK		
CHECK	SAV	29JUL02
CHECK		
CHECK		

PTC/CAD 2D