




Single Digit LED Displays 5", 7" 7-Segment

Digit Size	Part No.		Chip		Absolute Maximum Ratings				Electro-optical Data(At 10mA)			Drawing No.
	Common Anode	Common Cathode	Material/Emitted Color	Peak Wave Length λ_p (nm)	$\Delta\lambda$ (nm)	Pd (mw)	If (mA)	Ifp (mA)	Vf (v)		Iv. Typ. Per.Seg. (mcd)	
									Typ.	Max.		
5.00" Single-Digit	BS-AG21RD	BS-CG21RD	GaAsP/Red	655	40	800	40	200	16.0	20.0	25.0	SD-65
	BS-AG25RD	BS-CG25RD	GaP/ Bright Red	700	90	375	15	50	21.0	25.0	30.0	
	BS-AG25RE	BS-CG25RE										
	BS-AG22RD	BS-CG22RD	GaP/ Green	568	30	750	30	150	21.0	25.0	42.0	
	BS-AG23RD	BS-CG23RD	GaAsP/GaP/ Yellow	585	35	750	30	150	20.0	25.0	33.0	
	BS-AG24RD	BS-CG24RD	GaAsP/GaP/ Hi-Eff.Red	635	45	750	30	150	19.0	25.0	37.0	
			GaAsP/GaP/ Orange									
BS-AG26RD	BS-CG26RD	GaAlAs/ SH Super Red	660	20	750	30	150	17.0	25.0	100.0		
BS-AG2FRD	BS-CG2FRD	GaAlAs/ DDH Super Red	660	20	750	30	150	20.0	25.0	133.0		

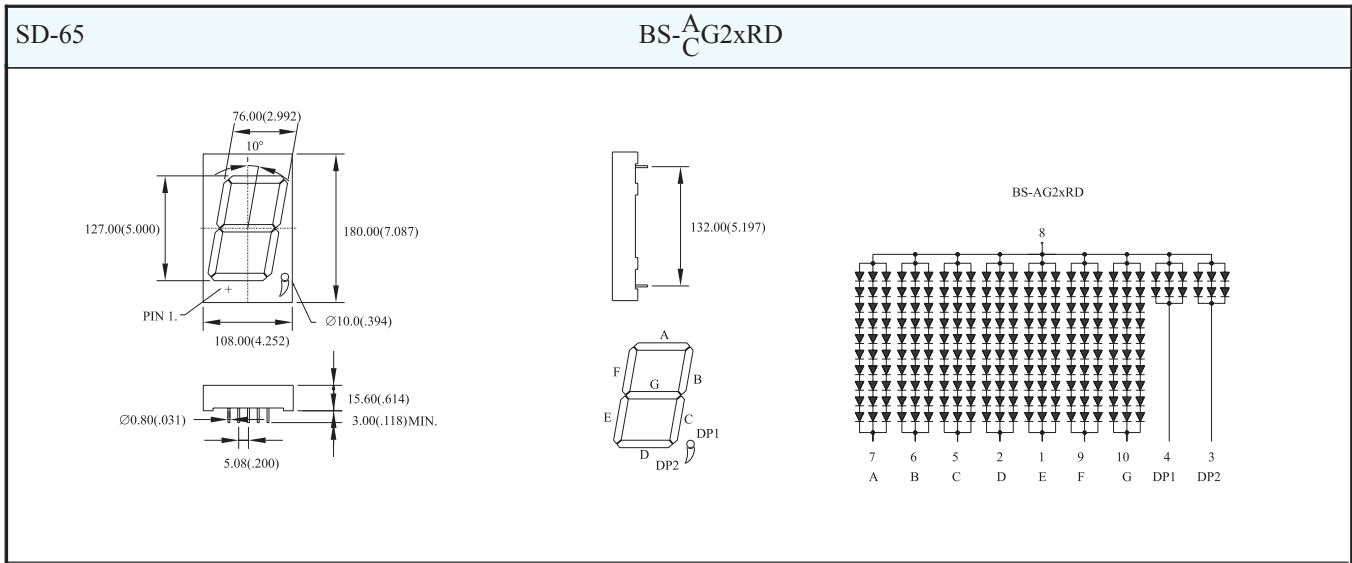

- NOTES: 1.ALL Dimensions are in millimeters(inches).
 2.Tolerance is±0.25mm(.010")
 3.Specifications are subject to change without notice.
 4.NP:No Pin. 5.NC:No Connect