

April 13, 1998

TEL: 805-498-2111 FAX: 805-498-3804 WEB: <http://www.semtech.com>


DESCRIPTION

The SC1117 series of high performance positive voltage regulators are designed for use in applications requiring low dropout performance at full rated current. Additionally, the SC1117 series provides excellent regulation over variations in line, load and temperature. Outstanding features include low dropout performance at rated current, fast transient response, internal current limiting and thermal shutdown protection of the output device. The SC1117 series of three terminal regulators offer fixed and adjustable voltage options available in both space saving SOT-223 and TO-263 packages.


APPLICATIONS

- Low voltage microcontrollers
- Switching power supply post-regulator

BLOCK DIAGRAM

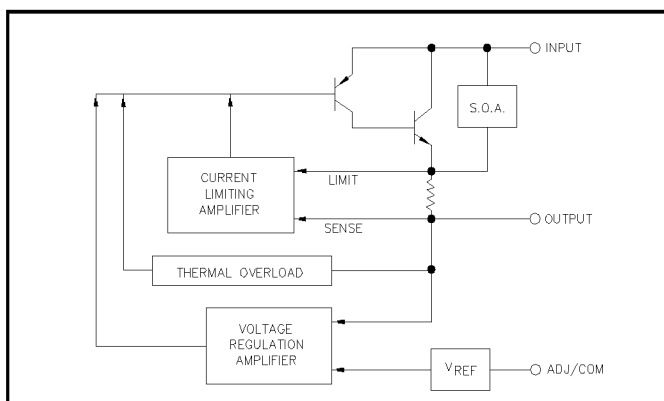

PIN CONFIGURATIONS

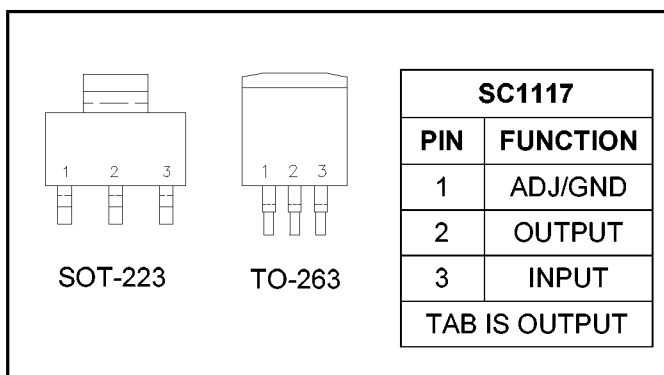

FEATURES

- V_{IN} 15V max.
- Low dropout performance, 1.3V max.
- Full current rating over line and temperature
- Fast transient response
- $\pm 2\%$ total output regulation over line, load and temperature
- Adjust pin current max 120 μ A over temperature
- Fixed/adjustable output voltage
- Line regulation 0.2% max.
- Load regulation 0.4% max.
- SOT-223 and TO-263 packages

ORDERING INFORMATION

DEVICE ⁽¹⁾⁽²⁾	PACKAGE	V _{OUT} VOLTS
SC1117CM-X.X SC1117CM	TO-263	See Note (1) 1.30 to 13.5
SC1117CST-X.X SC1117CST	SOT-223	See Note (1) 1.30 to 13.5

Notes:

(1) Where X.X denotes voltage options. Available voltages are: 2.85V, 3.3V and 5V. Leave blank for adjustable version (1.3 to 13.5V). Contact factory for additional voltage options.

(2) Add suffix 'TR' for tape and reel.

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Maximum	Units
Input Voltage	V _{IN}	15	V
Power Dissipation	P _D	Internally Limited	W
Thermal Resistance Junction to Case SOT-223 TO-263	θ_{JC}	15 3	°C/W
Thermal Resistance Junction to Ambient SOT-223 TO-263	θ_{JA}	150 60	°C/W
Operating Junction Temperature Range	T _J	0 to 125	°C
Storage Temperature Range	T _{STG}	-65 to 150	°C
Lead Temperature (Soldering) 10 Sec.	T _{LEAD}	260	°C

April 13, 1998

ELECTRICAL CHARACTERISTICS

Unless otherwise noted: Adj $V_{IN} = 2.65V$ to $15V$ and Adj $I_O = 10mA$ to $800mA$;
 Fixed $V_{IN} = (V_{OUT} + 1.5)$ to $15V$ and Fixed $I_O = 0mA$ to $800mA$.

		Test Conditions			Test Limits			
Parameter	Symbol	V_{IN}	I_O	$T_j^{(4)}$	Min	Typ	Max	Units
Output Voltage ⁽¹⁾ (Fixed Voltage Versions)	V_O	$V_O + 2V$	$10mA$	$25^\circ C$	$0.99 V_O $	V_O	$1.01 V_O $	V
		$(V_O + 1.5V)$ to $12V$		O.T.	$0.98 V_O $	V_O	$1.02 V_O $	
Reference Voltage ⁽¹⁾ (Adjustable Voltage Version)	V_{REF}	$5V$	$10mA$	$25^\circ C$	1.238	1.250	1.262	V
				O.T.	1.225	1.250	1.270	
Line Regulation ⁽¹⁾	$REG_{(LINE)}$		$10mA$	O.T.		0.035	0.2	%
Load Regulation ⁽¹⁾	$REG_{(LOAD)}$	$6.5V$		O.T.		0.2	0.4	%
Dropout Voltage $\Delta V_{OUT}, \Delta V_{REF} = 1\%$	V_D		$800mA$	O.T.		1.2	1.3	V
Current Limit	I_{CL}			O.T.	0.8			A
Quiescent Current Fixed Voltage Version	I_Q	$15V$		O.T.		10	14	mA
Temperature Coefficient	T_C			O.T.		0.005		%/ $^\circ C$
Adjust Pin Current	I_{ADJ}			O.T.		55	120	μA
Adjust Pin Current Change	ΔI_{ADJ}			O.T.		0.2	5	μA
Temperature Stability	T_S			O.T.		0.5		%
Minimum Load Current Adj Voltage Version	I_O	$V_O + 5V$		O.T.		5	10	mA
RMS Output Noise ⁽²⁾	V_N			$25^\circ C$		0.003		% V_O
Ripple Rejection Ratio ⁽³⁾	R_A	$V_O + 5V$		O.T.	60	72		dB


NOTES:

1. Low duty cycle pulse testing with Kelvin connections required.
2. Bandwidth of 10 Hz to 10kHz.
3. 120Hz input ripple (C_{ADJ} for ADJ = $25\mu F$).
4. Over Temp. (O.T.) = over specified operating junction temperature range.

April 13, 1998

TYPICAL APPLICATIONS

FIXED VOLTAGE REGULATOR⁽¹⁾⁽²⁾

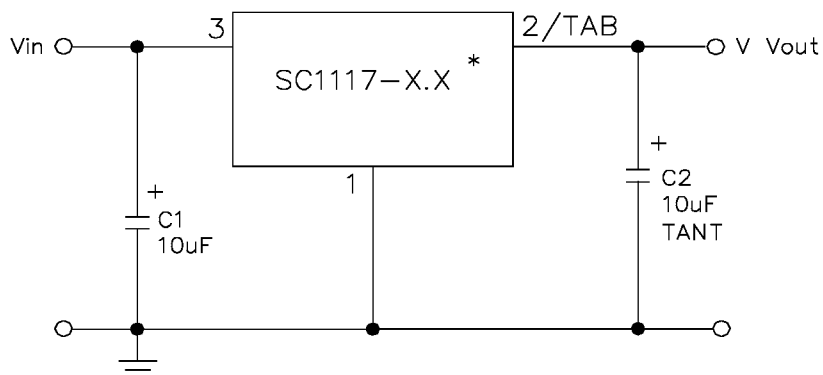


(1) $C1$ NEEDED IF DEVICE IS FAR FROM FILTER CAPACITORS.

(2) $C2$ REQUIRED FOR STABILITY.

* X.X = 2.85, 3.3 OR 5.0


ADJUSTABLE VOLTAGE REGULATOR⁽¹⁾⁽²⁾

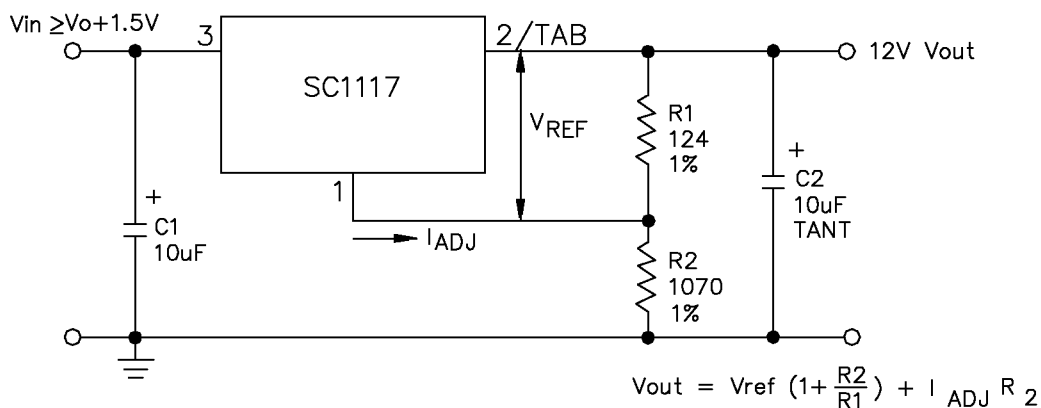

(1) $C1$ NEEDED IF DEVICE IS FAR FROM FILTER CAPACITORS.

(2) $C2$ REQUIRED FOR STABILITY.

April 13, 1998

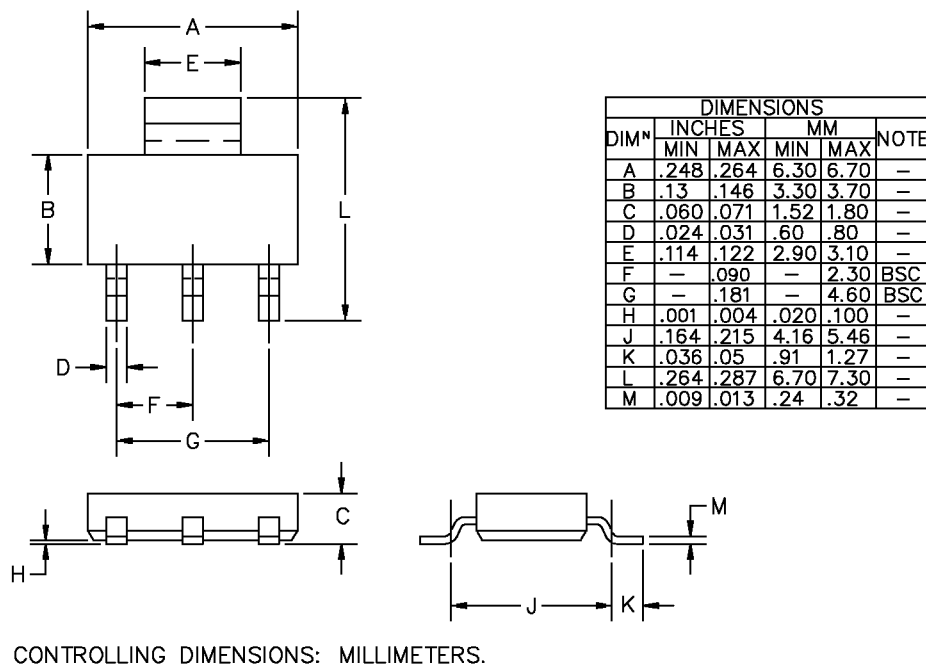DEVICE OUTLINE - SOT-223

DEVICE OUTLINE - TO-263
