


PLUGABLE COILS

09P SERIES



09P

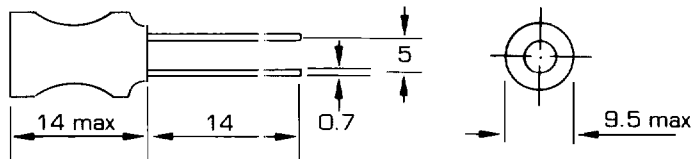

09P SERIES COILS & STANDARD VALUES

Ordering Code	Inductance L (μH) at 20 KHz	Tol. %	Q		SRF (MHz) min.	Dc-Res (Ω) max.	Rated DC Current (mA)
			min.	Freq. (MHz)			
09P-331K	330	10%	35	0.796	2.7	1.0	500
09P-391K	390				2.5	1.1	460
09P-471K	470				2.3	1.3	420
09P-561K	560				2.0	1.5	400
09P-681K	680				1.9	1.9	350
09P-821K	820				1.7	2.2	310
09P-102J	1000	±5	70	0.252	1.6	2.6	280
09P-122J	1200				1.4	3.0	250
09P-152J	1500				1.2	5.1	220
09P-182J	1800				1.1	5.6	200
09P-222J	2200				1.0	7.0	180
09P-272J	2700				0.9	8.0	170
09P-332J	3300				0.8	9.0	150
09P-392J	3900				0.75	10.0	140
09P-472J	4700				0.65	11.5	130
09P-562J	5600				0.63	15.0	120
09P-682J	6800				0.57	17.0	110
09P-822J	8200				0.50	20.0	100
09P-103J	10000		70	0.079	0.41	35.0	90
09P-123J	12000				0.38	40.0	80
09P-153J	15000				0.35	45.0	70
09P-183J	18000				0.34	50.0	65
09P-223J	22000				0.30	58.0	60
09P-273J	27000				0.29	70.0	55
09P-333J	33000				0.26	75.0	50