



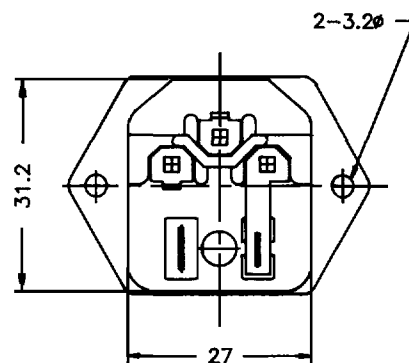
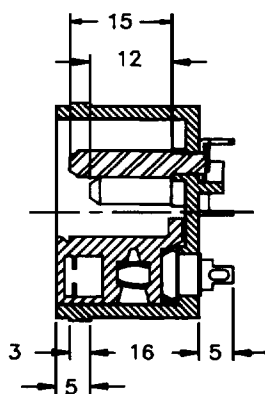


3P AC INLET RECEPTACLE (WITH FUSE HOLDER)

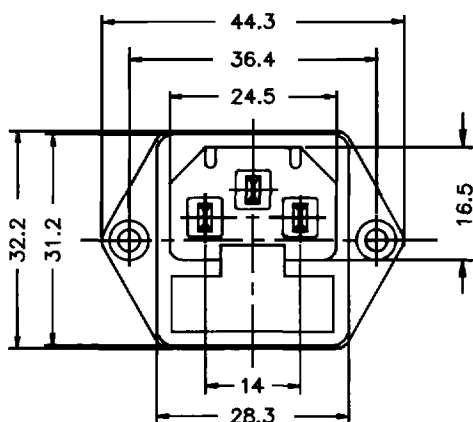

Insulation Resistance: 100M Ω Min.
 Dielectric Strength: 2000V Min.
 Operating Temperature: 65°C
 10A 250V: SEMKO,NEMKO,DEMKO,FIMKO.
 6A 250V: UL,CSA.

MODEL NO	NEW	2AC-01200030
	OLD	AC-012

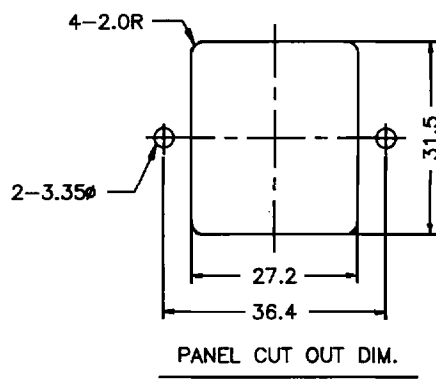

Insulation Resistance: 100M Ω Min.
 Dielectric Strength: 2000V Min.
 Operating Temperature: 65°C
 10A 250V: SEMKO,NEMKO,DEMKO,FIMKO.
 6A 250V: UL,CSA.

MODEL NO	NEW	2AC-01300030
	OLD	AC-013

PANEL THICKNESS	DIM "L"
0.8~1.8	31.3~31.5
1.9~3.2	31.5~31.7

