

40VA & 50VA Wire Lead Transformers

4000 Series - Class II U.L. 1585

Inherently Energy Limited (No secondary fusing required)

- Type "K" Foot Mount - features a steel bracket welded to the bottom of the laminations for easy mounting.
- Type "G" Panel Mount - features .156" diameter holes in each corner to allow direct mounting to a panel.

PART NUMBER	VA RATING	PRIMARY VOLTS	SEC. VOLTS	FREQUENCY HERTZ	"A" DIM.	"B" DIM.	"C" DIM.	"D" DIM.	"E" DIM.	BOX QUANTITY	APPROX. WEIGHT
4000-01V18K*	40	120	24	50/60	2.812"	2.25"	1.88"	2.25"	1.25"	25	1.52 lbs .69 kg
-02V18K*		240	24								
-03V18K*		277	24								
-04V18K*		480	24								
-09V18K*		208/240	24								
-51V18K*		380/415	24								
-78V18K*		575	24								
4000-01E07K999**	40	120	24	50/60	3.125"	2.625"	2.188"	2.125"	.875"	25	1.52 lbs .69 kg
-01E07K*		120	24								
-02E07K*		240	24								
-03E07K999**		277	24								
-03E07K*		277	24								
-04E07K999**		480	24								
-04E07K*		480	24								
-05E07K999**		120/208/240	24								
-05E07K*		120/208/240	24								
-09E07K999**		208/240	24								
-09E07K*		208/240	24								
-13E07K*		208/240/480	24								
-51E07K*		380/415	24								
-78E07K*		575	24								
4000-01AW18K999**	50	120	24	50/60	3.125"	2.625"	2.188"	2.56"	1.25"	10	2.10 lbs .95 kg
-01AW18K*		120	24								
-02AW18K*		240	24								
-03AW18K999**		277	24								
-03AW18K*		277	24								
-04AW18K999**		480	24								
-04AW18K*		480	24								
-09AW18K999**		208/240	24								
-09AW18K*		208/240	24								
-51AW18K*		380/415	24								
-78AW18K*		575	24								

To specify Panel Mount, change "K" in the part number to "G".
*A three digit customer ID suffix will be assigned by the factory.
Consult factory for availability of other voltage combinations.
** Part numbers with the "999" suffix are in stock and available for immediate shipment.


AGENCY APPROVALS: U.L./C.U.L. File E87824
Guide No. XOKV2
C.S.A. File LR56266
Insulation System = 130°C Class B

THE FOLLOWING FEATURES ARE STANDARD ON ALL LEADED MODELS									
PRIMARY LEAD COLOR CODE								SECONDARY	
VOLTAGE	COM	120	208	240	277	480	575	24	VAC
COLOR	BLK	WHT	RED	ORG	BRN	BLK/RED	GRY	BLU	YEL
LENGTH	9 1/2"	9 1/2"	9 1/2"	9 1/2"	9 1/2"	9 1/2"	9 1/2"	9 1/2"	9 1/2"
STRIP LENGTH	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
All leads are 18 AWG stranded 2/64" insulation thickness. ** Part numbers with "999" suffix have 12" total lead length, with 1/2" strip.									




40VA & 50VA Wire Lead Transformers

4000 Series - Class II U.L. 1585

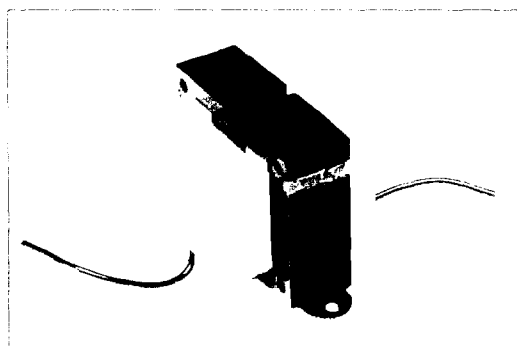


4000-01E07K*

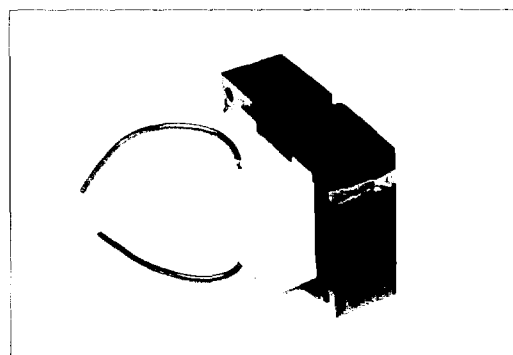


4000-01E07G*

Type "K" Foot Mount

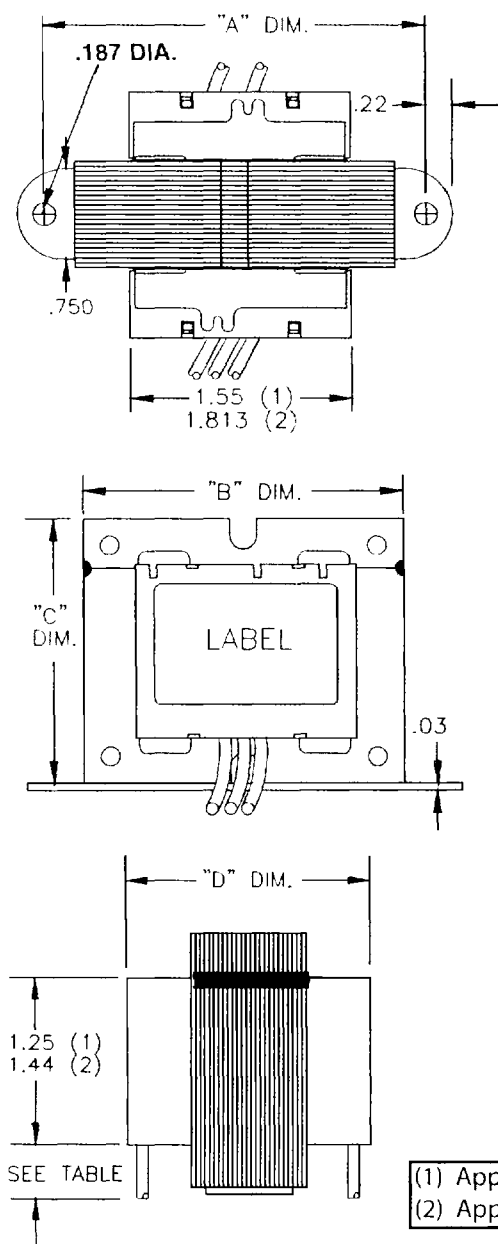

Type "G" Panel Mount

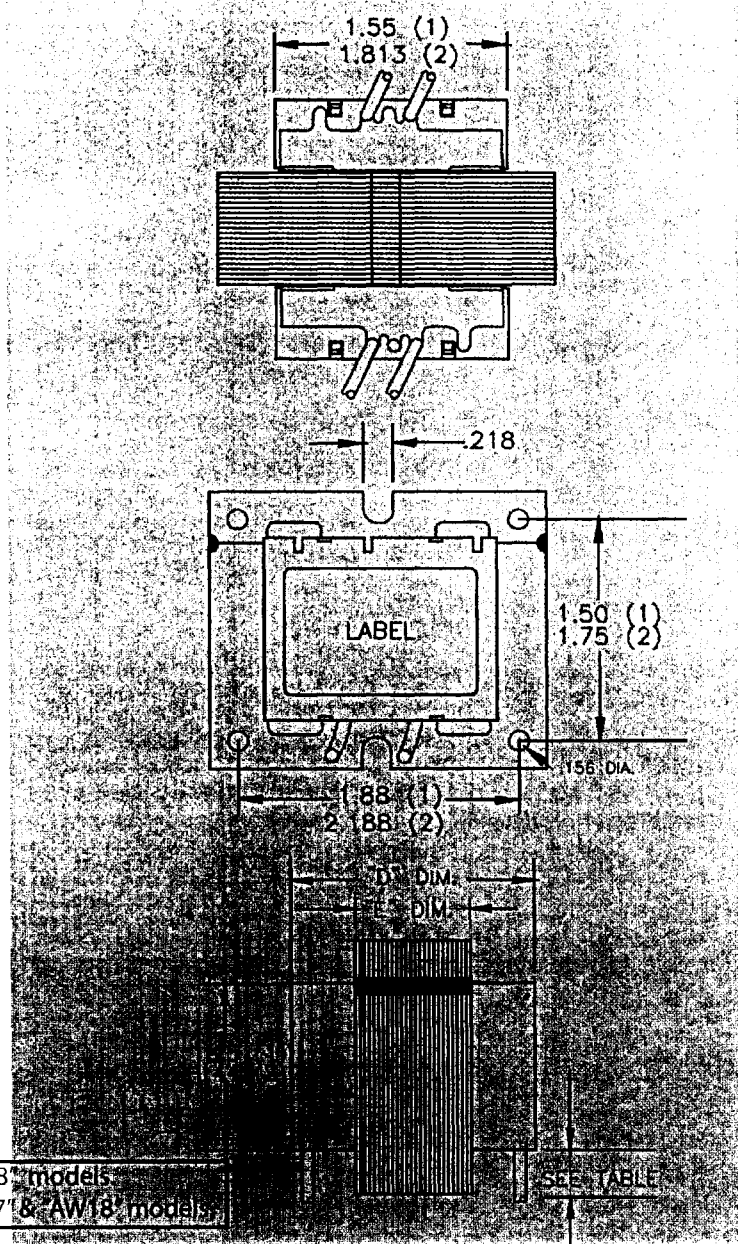

- (1) Applies to "V18" models
- (2) Applies to "E07" & "AW18" models

Dimensions shown are in inches and apply to transformers listed on page 26.



Products Unlimited Corp.
Sales & Technical Support
815-626-0300