



## 79LXX

## LINEAR INTEGRATED CIRCUIT


### 3-TERMINAL 0.1A NEGATIVE VOLTAGE REGULATOR

#### DESCRIPTION

The UTC **79LXX** family is monolithic fixed voltage regulator integrated circuit. They are suitable for applications that required supply current up to 100mA.

#### FEATURES

- \* Output Current up to 100mA.
- \* Fixed Output Voltage of -5V, -6V, -8V, -9V, -12V, -15V, -18V and -24V Available.
- \* Thermal Overload Shutdown Protection.
- \* Short Circuit Current Limiting.

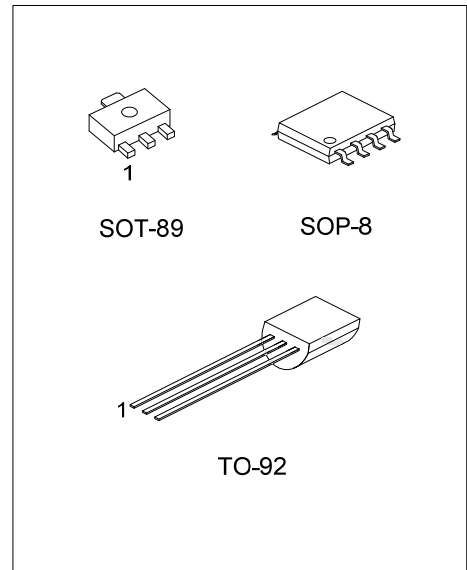

#### ORDERING INFORMATION



Ordering Number			Pin Assignment								Package	Packing
Normal	Lead Free Plating	Halogen Free	1	2	3	4	5	6	7	8		
79Lxx-AB3-R	79LxxL-AB3-R	79LxxG-AB3-R	G	I	O	-	-	-	-	-	SOT-89	Tape Reel
79Lxx-S08-R	79LxxL-S08-R	79LxxG-S08-R	O	I	I	N	G	I	I	N	SOP-8	Tape Reel
79Lxx-T92-B	79LxxL-T92-B	79LxxG-T92-B	G	I	O	-	-	-	-	-	TO-92	Tape Box
79Lxx-T92-K	79LxxL-T92-K	79LxxG-T92-K	G	I	O	-	-	-	-	-	TO-92	Bulk

Note: 1. xx: Output Voltage, refer to Marking Information.

2. Note: Pin Assignment: I:VIN O:VOUT G:GND

<p>79LxxL-AB3-R</p>	<p>(1) B: Tape Box, K: Bulk, R: Tape Reel, T: Tube</p> <p>(2) AB3: SOT-89, S08: SOP-8, T92: TO-92</p> <p>(3) G: Halogen Free, L: Lead Free, Blank: Pb/Sn</p> <p>(4) xx: refer to Marking Information</p>
---------------------	--

### MARKING INFORMATION

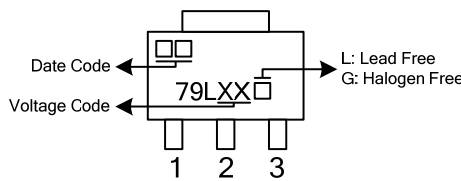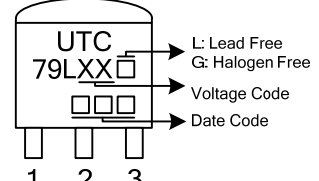PACKAGE	VOLTAGE CODE	MARKING
SOT-89	05:-5.0V 06:-6.0V 08:-8.0V 09:-9.0V	 <p>Diagram of SOT-89 package marking. The package is a small surface-mount component with three pins labeled 1, 2, and 3. The top surface has a rectangular area containing the marking '79LXX'. To the left of this area are two small squares, labeled 'Date Code'. To the right is one small square, labeled 'L: Lead Free' and 'G: Halogen Free'. Below the '79LXX' marking is another small square, labeled 'Voltage Code'.</p>
TO-92	10:-10V 12:-12V 15:-15V 18:-18V 24:-24V	 <p>Diagram of TO-92 package marking. The package is a small through-hole component with three pins labeled 1, 2, and 3. The top surface has a rectangular area containing the marking 'UTC' above '79LXX'. To the right of this area are two small squares, labeled 'L: Lead Free' and 'G: Halogen Free'. Below the '79LXX' marking is another small square, labeled 'Voltage Code'. At the bottom of the marking area are two more small squares, labeled 'Date Code'.</p>

### ■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	VALUE	UNIT	
Input Voltage	$V_{IN}$	$V_{OUT} = -5 \sim -9V$	-30	V
		$V_{OUT} = -12 \sim -15V$	-35	V
		$V_{OUT} = -18 \sim -24V$	-35	V
Power Dissipation	$P_D$	SOT-89	350	mW
		SOP-8	300	mW
		TO-92	625	mW
Ambient Operating Temperature	$T_{OPR}$	-30 ~ +125	°C	
Storage Temperature	$T_{STG}$	-40 ~ +125	°C	

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

### ■ ELECTRICAL CHARACTERISTICS

**79L05**( $T_J=25^\circ C$ ,  $C_1=0.33\mu F$ ,  $C_{OUT}=1\mu F$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	$V_{OUT}$	$V_{IN}=-10V$ , $I_{OUT}=40mA$	-4.8	-5.0	-5.2	V
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	$V_{IN}=-7 \sim -20V$ , $I_{OUT}=40mA$		15	150	mV
Load Regulation	$\frac{\Delta V_{OUT}}{\Delta I_{OUT} \times V_{OUT}}$	$V_{IN}=-10V$ , $I_{OUT}=1 \sim 100mA$		7	60	mV
Quiescent current	$I_Q$	$V_{IN}=-10V$ , $I_{OUT}=40mA$		3.5	6.0	mA
Ripple Rejection	RR	$V_{IN}=-8 \sim -18V$ , $I_{OUT}=40mA$ , $e_{in}=1V_{p-p}$ , $f=120Hz$	41	71		dB
Output Voltage Noise	eN	$V_{IN}=-10V$ , $I_{OUT}=40mA$ BW=10Hz~100kHz		120		$\mu V$

**79L06**( $T_J=25^\circ C$ ,  $C_1=0.33\mu F$ ,  $C_{OUT}=1\mu F$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	$V_{OUT}$	$V_{IN}=-12V$ , $I_{OUT}=40mA$	-5.76	-6.0	-6.24	V
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	$V_{IN}=-8.5 \sim -20V$ , $I_{OUT}=40mA$		15	150	mV
Load Regulation	$\frac{\Delta V_{OUT}}{\Delta I_{OUT} \times V_{OUT}}$	$V_{IN}=-12V$ , $I_{OUT}=1 \sim 100mA$		7	60	mV
Quiescent current	$I_Q$	$V_{IN}=-12V$ , $I_{OUT}=40mA$		3.5	6.0	mA
Ripple Rejection	RR	$V_{IN}=-9 \sim -19V$ , $I_{OUT}=40mA$ $e_{in}=1V_{p-p}$ , $f=120Hz$	41	71		dB
Output Voltage Noise	eN	$V_{IN}=-12V$ , $I_{OUT}=40mA$ BW=10Hz~100kHz		120		$\mu V$

**79L08**( $T_J=25^\circ C$ ,  $C_1=0.33\mu F$ ,  $C_{OUT}=1\mu F$ , unless otherwise specified)

PARAMETER	SYMBOL	Test conditions	MIN	TYP	MAX	UNIT
Output Voltage	$V_{OUT}$	$V_{IN}=-14V$ , $I_{OUT}=40mA$	-7.68	-8.0	-8.32	V
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	$V_{IN}=-10.5 \sim -23V$ , $I_{OUT}=40mA$		24	175	mV
Load Regulation	$\frac{\Delta V_{OUT}}{\Delta I_{OUT} \times V_{OUT}}$	$V_{IN}=-14V$ , $I_{OUT}=1 \sim 100mA$		10	80	mV
Quiescent current	$I_Q$	$V_{IN}=-14V$ , $I_{OUT}=40mA$		3.5	6.0	mA
Ripple Rejection	RR	$V_{IN}=-11 \sim -21V$ , $I_{OUT}=40mA$ $e_{in}=1V_{p-p}$ , $f=140Hz$	39	68		dB
Output Voltage Noise	eN	$V_{IN}=-14V$ , $I_{OUT}=40mA$ BW=10Hz~100kHz		190		$\mu V$

■ ELECTRICAL CHARACTERISTICS(Cont.)

79L09( $T_J=25^\circ\text{C}$ ,  $C_1=0.33\mu\text{F}$ ,  $C_{OUT}=1\mu\text{F}$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	$V_{OUT}$	$V_{IN}=-15\text{V}$ , $I_{OUT}=40\text{mA}$	-8.64	-9.0	-9.36	V
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	$V_{IN}=-12.5\sim-24\text{V}$ , $I_{OUT}=40\text{mA}$		27	200	mV
Load Regulation	$\frac{\Delta V_{OUT}}{\Delta I_{OUT} \times V_{OUT}}$	$V_{IN}=-15\text{V}$ , $I_{OUT}=1\sim 100\text{mA}$		12	90	mV
Quiescent current	$I_Q$	$V_{IN}=-15\text{V}$ , $I_{OUT}=40\text{mA}$		3.5	6.0	mA
Ripple Rejection	RR	$V_{IN}=-12\sim-22\text{V}$ , $I_{OUT}=40\text{mA}$ $e_{in}=1\text{Vp-p}$ , $f=150\text{Hz}$	37	64		dB
Output Voltage Noise	eN	$V_{IN}=-15\text{V}$ , $I_{OUT}=40\text{mA}$ $BW=10\text{Hz}\sim 100\text{kHz}$		210		$\mu\text{V}$

79L12( $T_J=25^\circ\text{C}$ ,  $C_1=0.33\mu\text{F}$ ,  $C_{OUT}=1\mu\text{F}$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	$V_{OUT}$	$V_{IN}=-19\text{V}$ , $I_{OUT}=40\text{mA}$	-11.52	-12.0	-12.48	V
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	$V_{IN}=-14.5\sim-27\text{V}$ , $I_{OUT}=40\text{mA}$		36	250	mV
Load Regulation	$\frac{\Delta V_{OUT}}{\Delta I_{OUT} \times V_{OUT}}$	$V_{IN}=-19\text{V}$ , $I_{OUT}=1\sim 100\text{mA}$		16	100	mV
Quiescent current	$I_Q$	$V_{IN}=-19\text{V}$ , $I_{OUT}=40\text{mA}$		3.5	6.0	mA
Ripple Rejection	RR	$V_{IN}=-15\sim-25\text{V}$ , $I_{OUT}=40\text{mA}$ $e_{in}=1\text{Vp-p}$ , $f=190\text{Hz}$	37	64		dB
Output Voltage Noise	eN	$V_{IN}=-19\text{V}$ , $I_{OUT}=40\text{mA}$ $BW=10\text{Hz}\sim 100\text{kHz}$		210		$\mu\text{V}$

79L15( $T_J=25^\circ\text{C}$ ,  $C_1=0.33\mu\text{F}$ ,  $C_{OUT}=1\mu\text{F}$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	$V_{OUT}$	$V_{IN}=-23\text{V}$ , $I_{OUT}=40\text{mA}$	-14.4	-15.0	-15.6	V
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	$V_{IN}=-17.5\sim-30\text{V}$ , $I_{OUT}=40\text{mA}$		45	300	mV
Load Regulation	$\frac{\Delta V_{OUT}}{\Delta I_{OUT} \times V_{OUT}}$	$V_{IN}=-23\text{V}$ , $I_{OUT}=1\sim 100\text{mA}$		20	150	mV
Quiescent current	$I_Q$	$V_{IN}=-23\text{V}$ , $I_{OUT}=40\text{mA}$		3.5	6.0	mA
Ripple Rejection	RR	$V_{IN}=-18.5\sim-28.5\text{V}$ , $I_{OUT}=40\text{mA}$ $e_{in}=1\text{Vp-p}$ , $f=230\text{Hz}$	34	63		dB
Output Voltage Noise	eN	$V_{IN}=-23\text{V}$ , $I_{OUT}=40\text{mA}$ $BW=10\text{Hz}\sim 100\text{kHz}$		340		$\mu\text{V}$

79L18( $T_J=25^\circ\text{C}$ ,  $C_1=0.33\mu\text{F}$ ,  $C_{OUT}=1\mu\text{F}$ , unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	$V_{OUT}$	$V_{IN}=-27\text{V}$ , $I_{OUT}=40\text{mA}$	-17.28	-18.0	-18.72	V
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	$V_{IN}=-20.5\sim-33\text{V}$ , $I_{OUT}=40\text{mA}$		54	300	mV
Load Regulation	$\frac{\Delta V_{OUT}}{\Delta I_{OUT} \times V_{OUT}}$	$V_{IN}=-27\text{V}$ , $I_{OUT}=1\sim 100\text{mA}$		23	170	mV
Quiescent current	$I_Q$	$V_{IN}=-27\text{V}$ , $I_{OUT}=40\text{mA}$		3.5	6.0	mA
Ripple Rejection	RR	$V_{IN}=-23\sim-33\text{V}$ , $I_{OUT}=40\text{mA}$ $e_{in}=1\text{Vp-p}$ , $f=270\text{Hz}$	33	60		dB
Output Voltage Noise	eN	$V_{IN}=-27\text{V}$ , $I_{OUT}=40\text{mA}$ $BW=10\text{Hz}\sim 100\text{kHz}$		410		$\mu\text{V}$

■ ELECTRICAL CHARACTERISTICS(Cont.)


79L24(T<sub>J</sub>=25°C, C<sub>1</sub>=0.33μF, C<sub>OUT</sub>=1μF, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V <sub>OUT</sub>	V <sub>IN</sub> =-33V, I <sub>OUT</sub> =40mA	-23.04	-24.0	-24.96	V
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	V <sub>IN</sub> =-27~-38V, I <sub>o</sub> =40mA		72	350	mV
Load Regulation	$\frac{\Delta V_{OUT}}{\Delta I_{OUT} \times V_{OUT}}$	V <sub>IN</sub> =-33V, I <sub>OUT</sub> =1~100mA		30	200	mV
Quiescent current	I <sub>Q</sub>	V <sub>IN</sub> =-33V, I <sub>OUT</sub> =40mA		3.5	6.0	mA
Ripple Rejection	RR	V <sub>IN</sub> =-29~-35V, I <sub>OUT</sub> =40mA e <sub>in</sub> =1Vp-p, f=330Hz	31	55		dB
Output Voltage Noise	eN	V <sub>IN</sub> =-33V, I <sub>OUT</sub> =40mA BW=10Hz~100kHz		550		μV







## ■ APPLICATION CIRCUIT

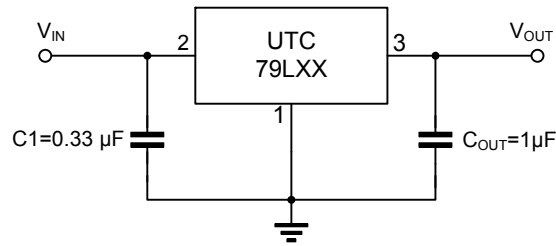

## ■ TEST CIRCUIT

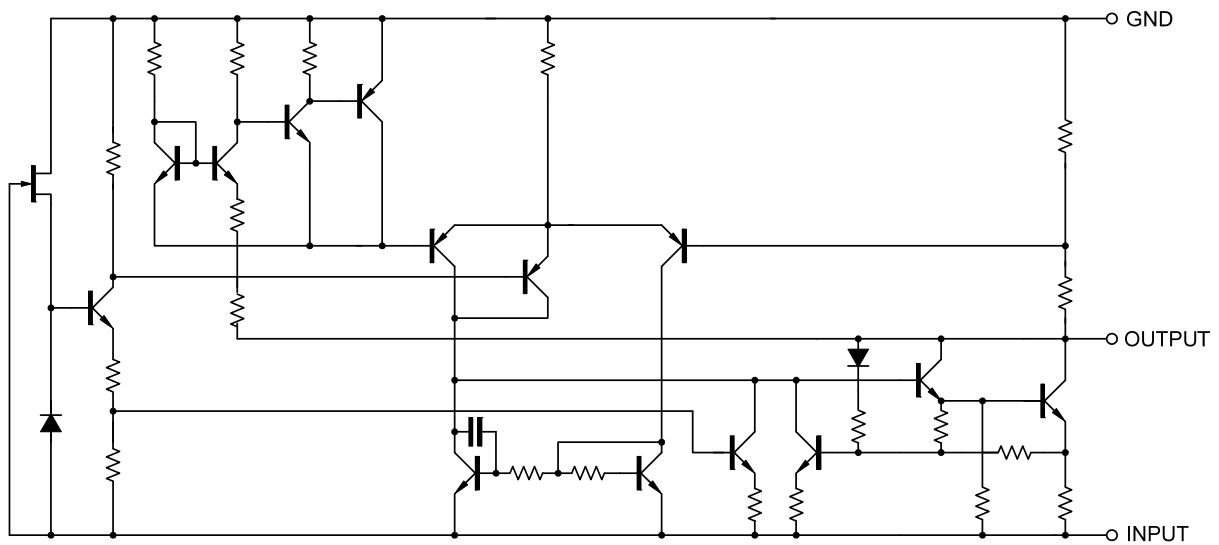


## TYPICAL CHARACTERISTICS

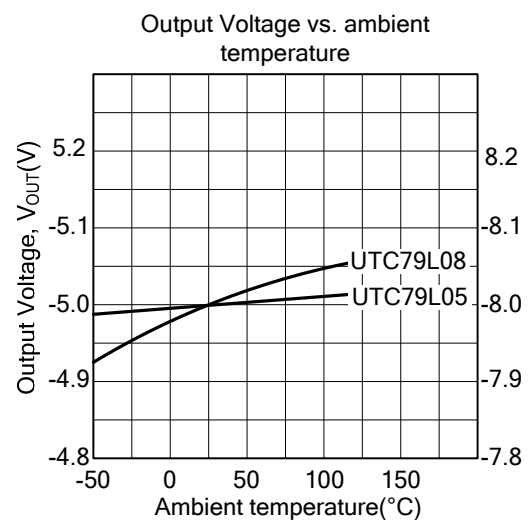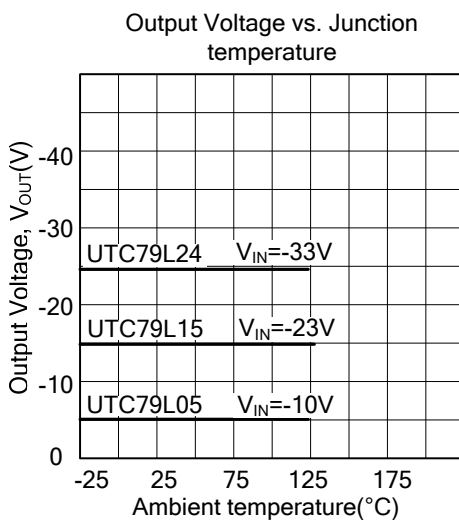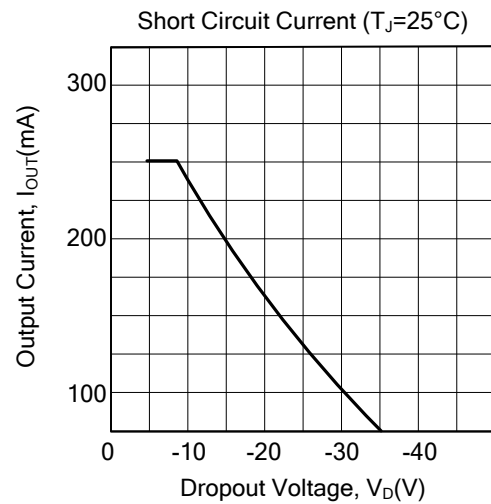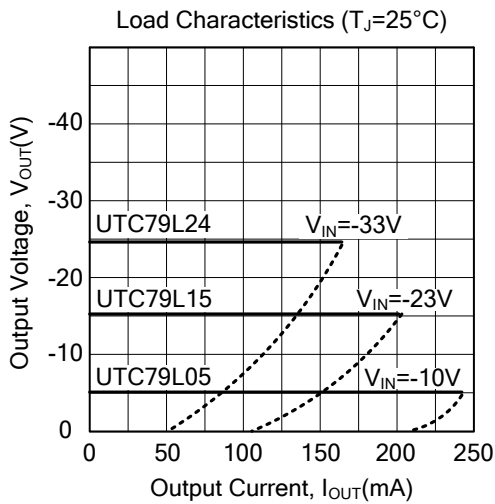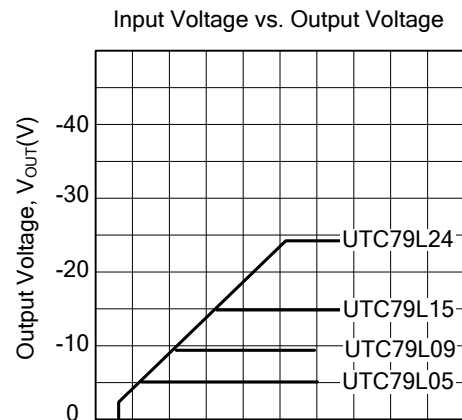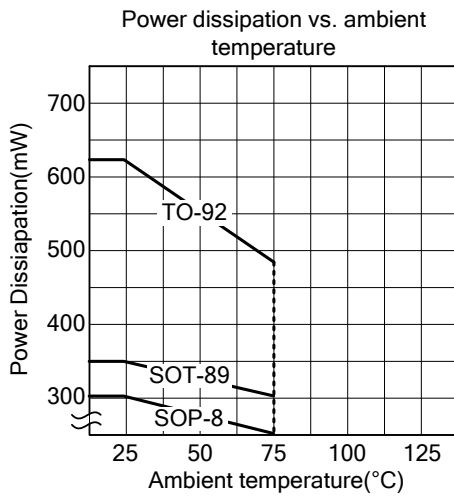


■ TYPICAL CHARACTERISTICS(Cont.)


UTC79L05 Dropout Characteristics  
( $T_J=25^\circ\text{C}$ )

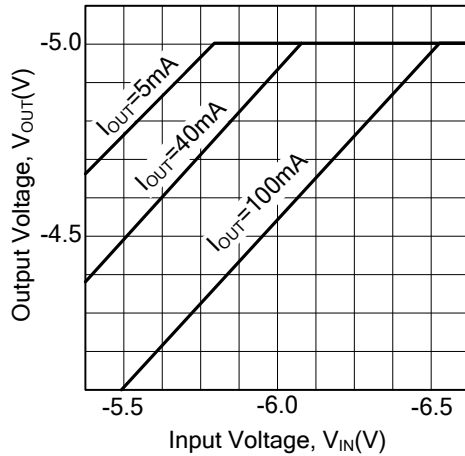

UTC79L08 Dropout Characteristics  
( $T_J=25^\circ\text{C}$ )

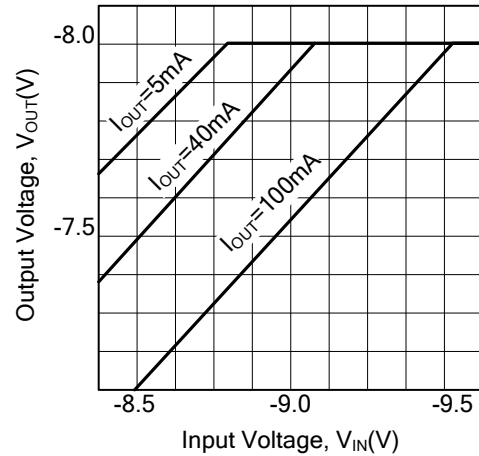

Current vs. Input Voltage  
( $I_{OUT}=0\text{mA}$ ,  $T_J=25^\circ\text{C}$ )

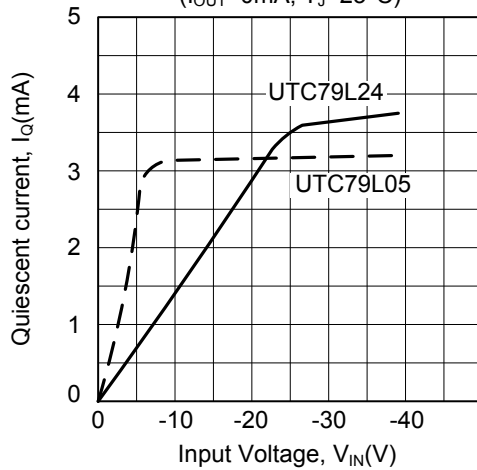

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.