


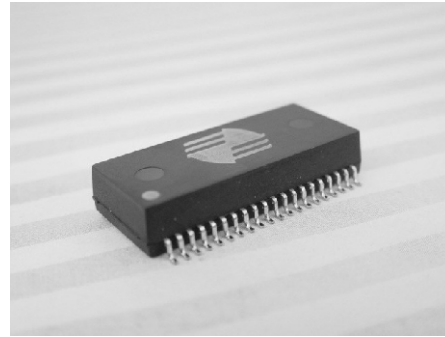




-  Eight Transformers in a single SMT package
-  Models designed for leading quad and dual T1/E1/CEPT/ISDN-Pri transceivers
-  Excellent crosstalk performance



ELECTRICAL SPECIFICATION @25°C

Part Number		Turns Ratio (Pri: Sec ±2%)		OCL (mH Min)		LL (uH Max)		Cww (pF Max)		Schematic	Primary Pins	
Std. Temp (0°C to +70°C)	Ext. Temp (-40°C to +85°C)	Tx	Rx	Tx	Rx	Tx	Rx	Tx	Rx		Tx	Rx
821-M0399	821-M0418	1:1.36	1:1.36CT	1.2		0.6		35		1	1-2, 6-7, 11-12, 16-17	38-36, 33-31, 28-26, 23-21
821-M0400	821-M0419	1:1.14	1:1.14CT	1.2		0.6		35		1	1-2, 6-7, 11-12, 16-17	38-36, 33-31, 28-26, 23-21
821-M0401	821-M0420	1:2CT	1:2CT	1.2		0.8		35		3	4-5, 9-10, 14-15, 19-20	24-25, 29-30, 34-35, 39-40
821-M0402	821-M0421	1:2	1:2CT	1.2		0.6		35		4	1-2, 9-10, 11-12, 19-20	23-25, 26-28, 33-35, 36-38
821-M0403	821-M0422	1:1.36CT	1:2CT	1.2		0.6		35		3	24-25, 29-30, 34-35, 39-40	4-5, 9-10, 14-15, 19-20
821-M0404	821-M0423	1:2CT	1:1CT	1.2		0.6		35		2	1-2, 6-7, 11-12, 16-17	21-22, 26-27, 31-32, 36-37
821-M0405	821-M0424	1CT:1.41	1CT:1.41	1.2		0.6		35		3	1-3, 6-8, 11-13, 16-18	21-23, 26-28, 31-33, 36-38
821-M0406	821-M0425	1:1.15	1:2CT	1.2		0.6		35		1	1-2, 6-7, 11-12, 16-17	21-23, 26-28, 31-33, 36-38
821-M0407	821-M0426	1:1/1.26	1:2CT	1.2		0.6		35		2	1-2, 6-7, 11-12, 16-17	21-22, 26-27, 31-32, 36-37
821-M0408	821-M0427	1:1.15	1:1.15	1.2		0.6		35		5	1-3, 6-8, 11-13, 16-18	4-5, 9-10, 14-15, 19-20
821-M0409	821-M0428	1:2	1:2	1.2		0.6		35		5	1-3, 6-8, 11-13, 16-18	4-5, 9-10, 14-15, 19-20
821-M0410	----	1:1.08	1.08CT:1	1.2		0.4	0.5	35		1	1-2, 6-7, 11-12, 16-17	38-36, 33-31, 28-26, 23-21
821-M0411	821-M0429	1:2CT	1CT:2	1.2		0.6		35		3	4-5, 9-10, 14-15, 19-20	1-3, 6-8, 11-13, 16-18
821-M0412	----	1:1.70	1:1.36CT	1.2		0.8	0.6	35		1	1-2, 6-7, 11-12, 16-17	21-23, 26-28, 31-33, 36-38
821-M0622	----	1:1.36CT	1:1CT	1.2		0.6		35		3	24-25, 29-30, 34-35, 39-40	4-5, 9-10, 14-15, 19-20
821-M0413	821-M0431	1:2.4	1:1	1.0		0.5		35		6	1-2, 8-9, 11-12, 18-19	24-25, 27-28, 34-35, 37-38
----	821-M0430	1:1.5	1.41:1	1.0		0.5		35		6	1-2, 8-9, 11-12, 18-19	24-25, 27-28, 34-35, 37-38
821-M0414	----	1:2/2.4	1:0.79/1	1.0		1.0		35		7	1-2, 9-10, 11-12, 19-20	37-36, 35-34, 27-26, 25-24
821-M0415	----	1:2.42	1:2.42	1.2		0.6		35		5	1-3, 6-8, 11-13, 16-18	4-5, 9-10, 14-15, 19-20




ELECTRICAL SPECIFICATION @25°C

Part Number		Turns Ratio (Pri: Sec ±2%)		OCL (mH Min)		LL (uH Max)		Cww (pF Max)		Schematic	Primary Pins	
Std. Temp (0°C to +70°C)	Ext. Temp (-40°C to +85°C)	Tx	Rx	Tx	Rx	Tx	Rx	Tx	Rx		Tx	Rx
821-M0416	----	1:2.1CT	1:2.1CT	1.2	0.6	0.6		35		2	1-2, 6-7, 11-12, 16-17	21-22, 26-27, 31-32, 36-37
821-M0417	----	1:2.45CT	1:2.45CT	1.2	0.6	0.6		35		2	1-2, 6-7, 11-12, 16-17	21-22, 26-27, 31-32, 36-37
----	821-M1624	1:2	1:2	1.2		0.7		35		6	1-2, 6-7, 11-12, 16-17	3-4, 8-9, 13-14, 18-19
----	821-M1643	1:2CT	1CT:1	1.2		0.6		35		3	4-5, 9-10, 14-15, 19-20	1-3, 6-8, 11-13, 16-18
----	821-M1014	1:1.36	1:1	1.2		0.6		40		5	1-3, 6-8, 11-13, 16-18	4-5, 9-10, 14-15, 19-20
----	821-M1015	1:1CT	1:1CT	1.2		0.6		35		3	4-5, 9-10, 14-15, 19-20	24-25, 29-30, 34-35, 39-40
----	821-M1016	1:1.26CT	1:1.26CT	1.2		0.6		35		3	4-5, 9-10, 14-15, 19-20	24-25, 29-30, 34-35, 39-40
----	821-M1644	1:1	1:1	1.2		0.7		35		5	1-3, 6-8, 11-13, 16-18	4-5, 9-10, 14-15, 19-20

MECHANICAL DIMENSIONS

Package: SO040A

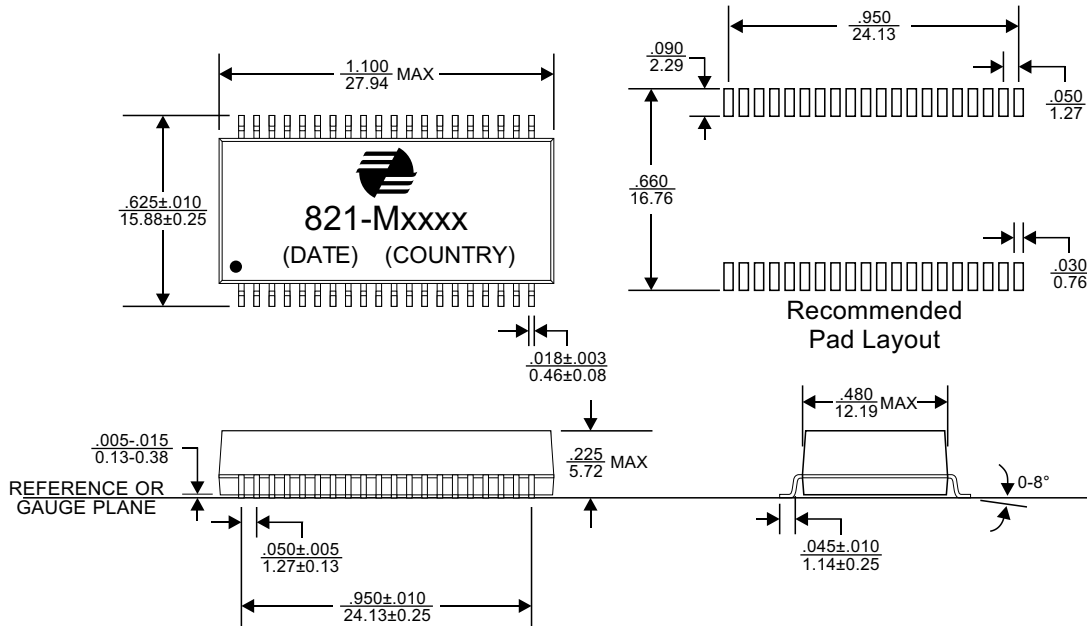


Notes: All dimensions are specified in $\frac{\text{inches}}{\text{mm}}$ with higher precedence in inches.
Unless otherwise specified, all tolerances are $\pm \frac{.010}{.25}$.

Weight (in gram)	: 4.0 typ.
Tape & Reel	: 350 / reel




SCHEMATICS


Schematic 1

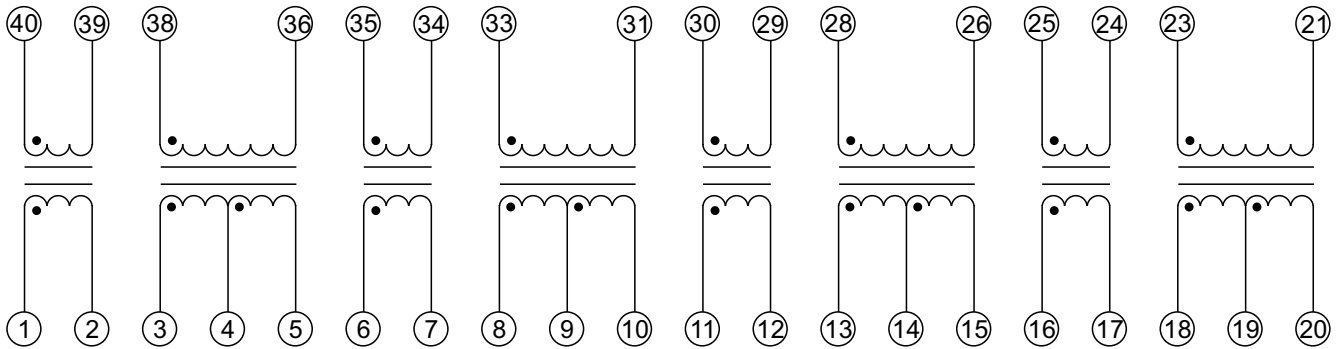

Schematic 2

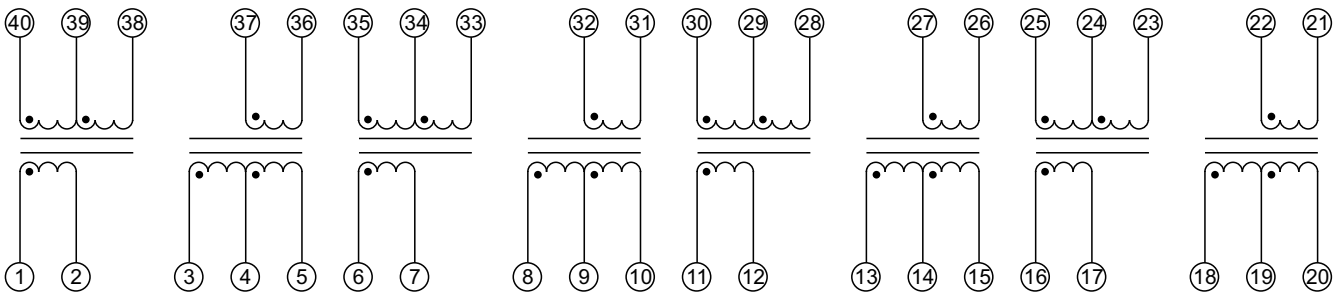


Schematic 3

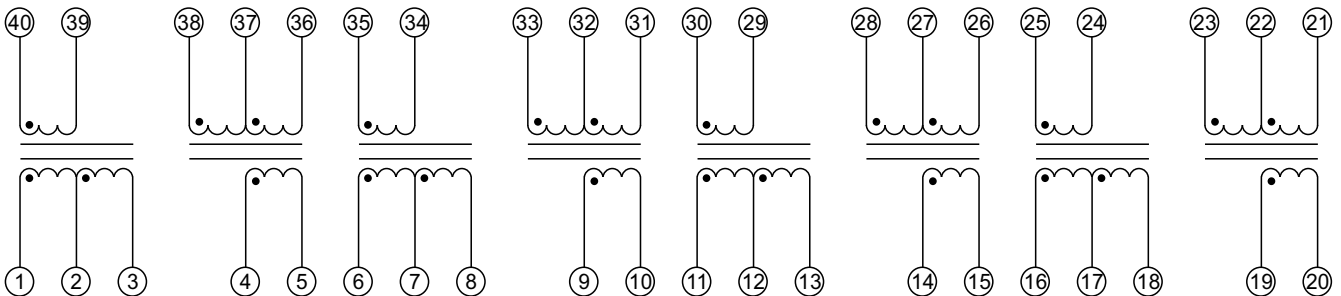




SCHEMATICS


Schematic 4

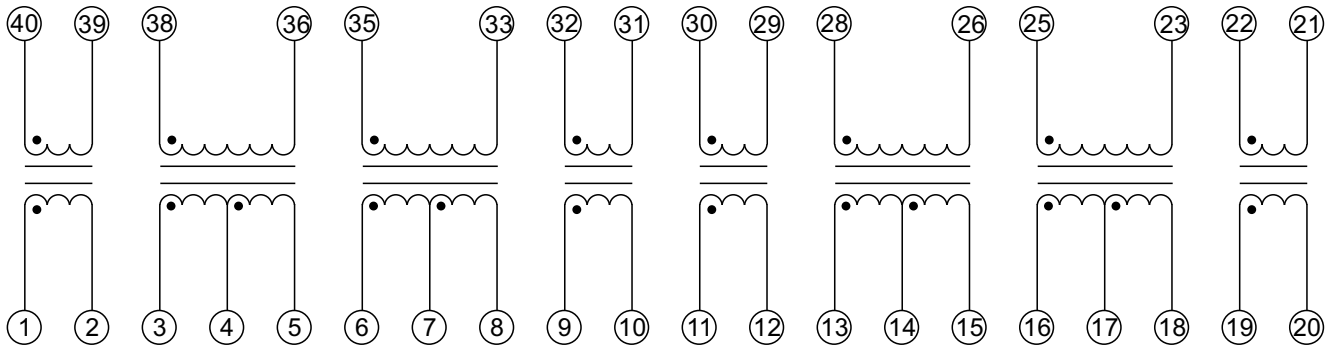

Schematic 5

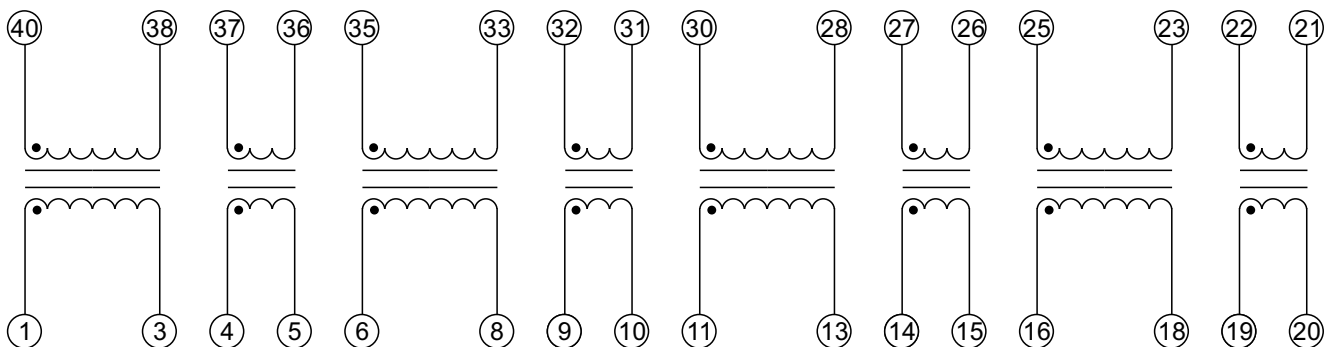


Schematic 6

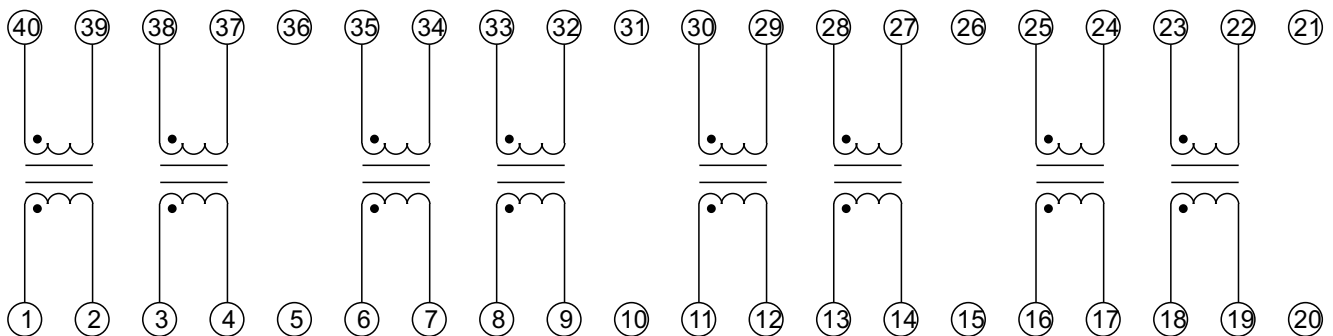



SCHEMATICS

Schematic 7

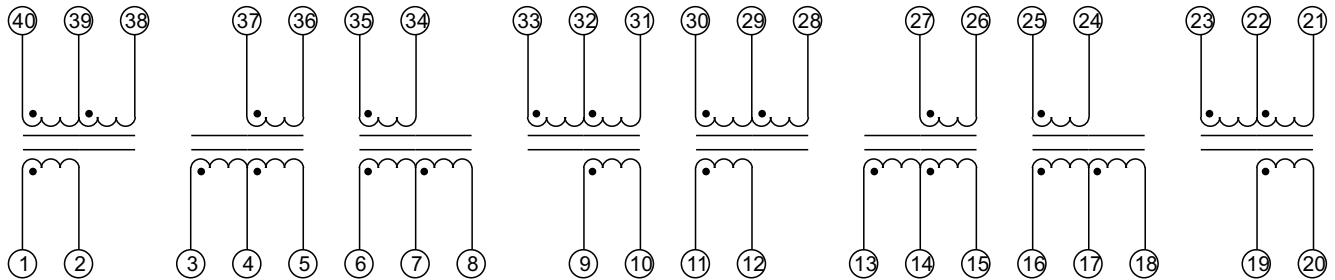

FOR MORE INFORMATION, PLEASE CONTACT

HEADQUARTER
Unit B10, 3/F., Merit Industrial Centre,
94 Tokwawan Road, Kowloon,
Hong Kong
Tel: (852) 2954 3333
Fax: (852) 2954 3304
Email: eempl@eleceltek.com
Website: <http://www.eleceltek.com>

Information herein is for reference only and subject to change without notice. It does not constitute any representation, warranty or commitment of the company in respect of the products in any aspect. All logos, brands and product names mentioned herein are trademarks or registered trademarks of their respective owners. The company does not assume any liability arising out of the application or use of any product or circuit described herein. Copyrights 2004, E & E Magnetic Products Limited.