

Chip Beads(SMD) For Power Line

Conformity to RoHS Directive

ACH Series ACH32C Type

FEATURES

- These T-type EMC filters comprise ferrite beads and chip capacitors and are engineered to handle high current levels.
- They provide highly effective EMC suppression.
- Because their structures are almost entirely ferrite, they exhibit excellent attenuation characteristics.
- Because guarantee temperature range is -40 to $+125^{\circ}\text{C}$, it is possible to use in strict environmental condition.
- Available for reflow soldering.

APPLICATIONS

Home electronic equipment, (TVs, VCRs, CD players, DAT players, electric musical instruments, PCs, etc.), office automation equipment (computers, terminals, stand-alone word processors, fax machines, etc.), factory automation equipment (robots, numerical control devices, process controllers, etc.), automotive electronics (car navigation, ECU, etc.)

PRODUCT IDENTIFICATION

ACH	32C	-	103	-	T	-	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
(1)	(2)	(3)	(4)	(5)			

- (1) Series name
 (2) Dimensions
 32C: 3216 type(3.2×1.6mm)
 (3) Capacitance
 103: 10000pF
 (4) Packaging style
 T: ϕ 180mm reel taping
 TL: ϕ 330mm reel taping
 (5) TDK internal code


TEMPERATURE RANGES

Operating/Storage	-40 to $+125^{\circ}\text{C}$
-------------------	---------------------------------


PACKAGING STYLE AND QUANTITIES

Packaging style	Reel	Quantity
Taping	ϕ 180mm	2000 pieces/reel
	ϕ 330mm	10000 pieces/reel

SHAPES AND DIMENSIONS/CIRCUIT DIAGRAM

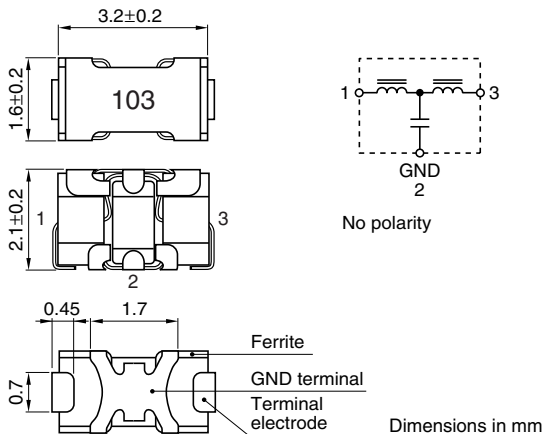

RECOMMENDED PC BOARD PATTERN REFLOW SOLDERING

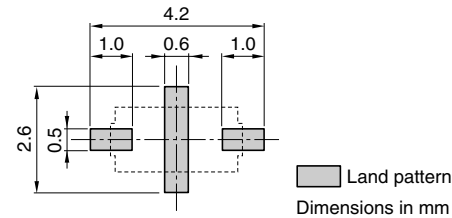

- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
- Please contact our Sales office when your application are considered the following:
 The device's failure or malfunction may directly endanger human life (e.g. application for automobile/aircraft/medical/nuclear power devices, etc.)
- All specifications are subject to change without notice.





ELECTRICAL CHARACTERISTICS

Part No.	Rated voltage Edc(V)max.	Rated current (A)max.	Insulation resistance (M Ω)min.	DC resistance (m Ω)max.	Guaranteed attenuation (dB)	Guaranteed frequency bandwidth (MHz)
ACH32C-100-T-001	50	6	100	2	-15	2000 to 6000
ACH32C-220-T-001	50	6	100	2	-15	1300 to 2500
ACH32C-470-T-001	50	6	100	2	-15	650 to 2500
ACH32C-101-T-001	50	6	100	2	-20	450 to 1300
ACH32C-331-T-001	50	6	100	2	-20	200 to 800
ACH32C-102-T-001	50	6	100	2	-25	100 to 350
ACH32C-222-T-001	50	6	100	2	-25	55 to 300
ACH32C-103-T-001	50	6	100	2	-25	30 to 200
ACH32C-333-T-001	50	6	100	2	-25	10 to 300
ACH32C-104-T-001	50	6	100	2	-25	3.5 to 200

TYPICAL ELECTRICAL CHARACTERISTICS

ATTENUATION vs. FREQUENCY CHARACTERISTICS

(Glass epoxy coated double side mounting PCB)

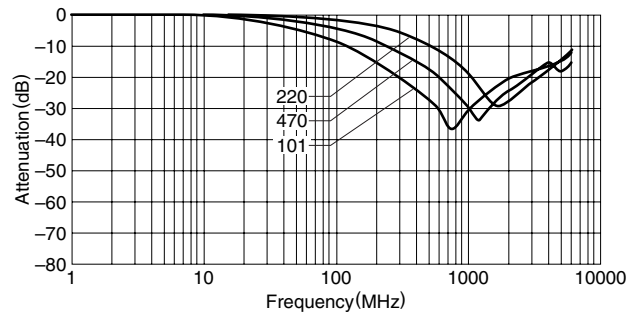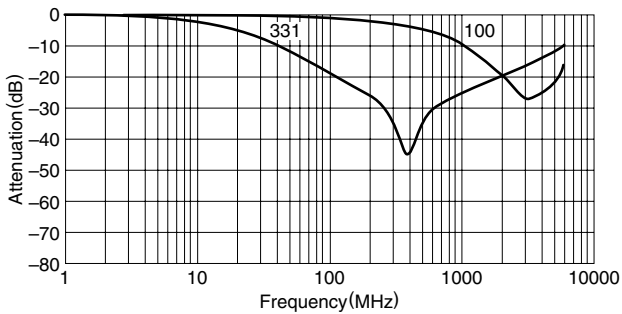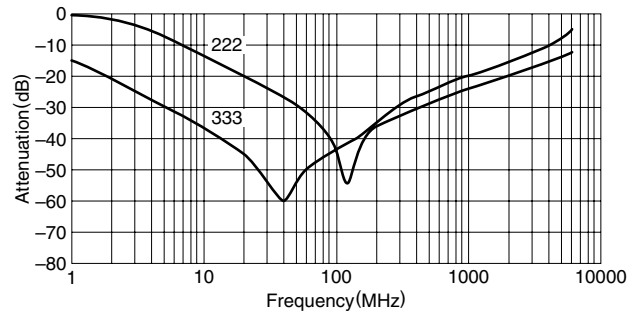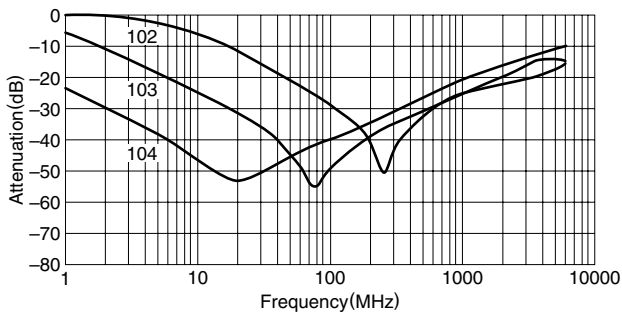

CIRCUIT DIAGRAM

