



ASH-10 Series Pitch 10mm

Specifications



BARRIER MATERIAL: PHENOLIC OR THERMOPLASTIC, BLACK
 TERMINALS: TIN PLATED BRASS
 SCREWS: NICKEL PLATED STEEL
 WIRE RANGE AWG: 14-22 STR.
 RATING: 15 AMPERES, 300 VAC
 INSULATION WITHSTANDS VOLTAGE AC 2000
 INSULATION RESISTANCE 500MΩ OR MORE AT DC 500V

MOUNTING END & BARRIER
 END ARE BOTH AVAILABLE



ASH-10-0

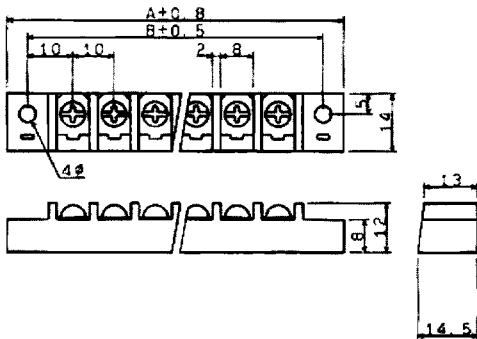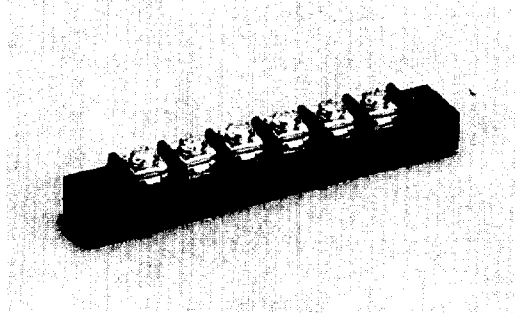



ASH-10-A

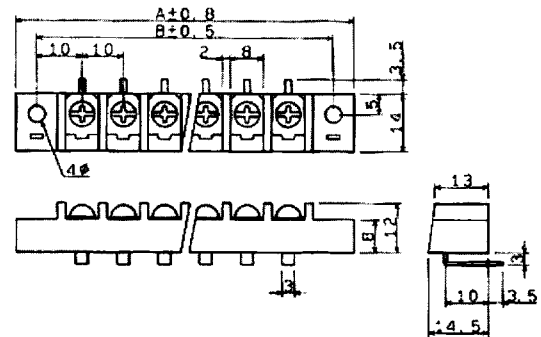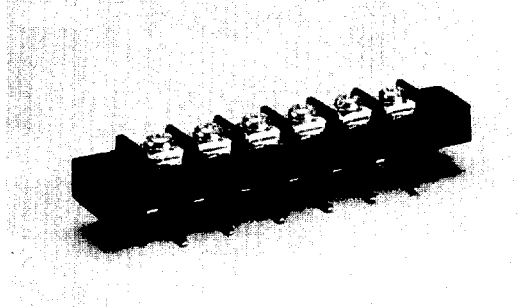

ASH-10-B

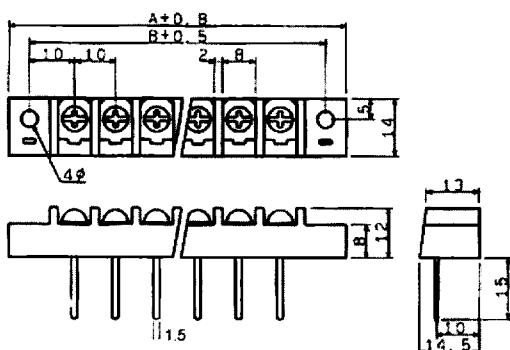
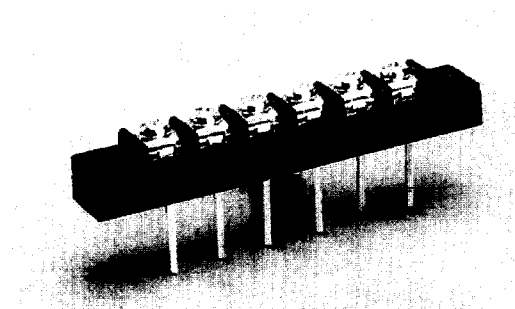


ASH-10-C

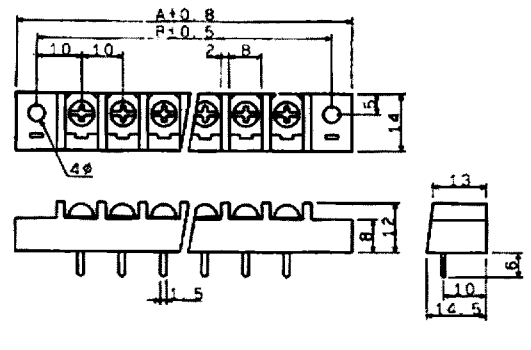
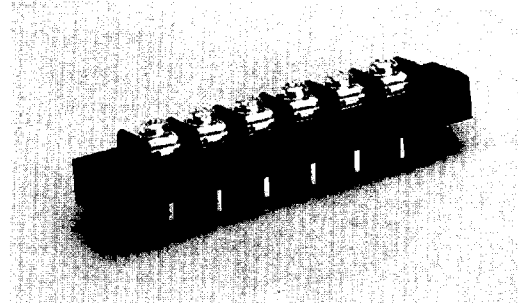


ASH-10 Series Continued....



ASH-10-D

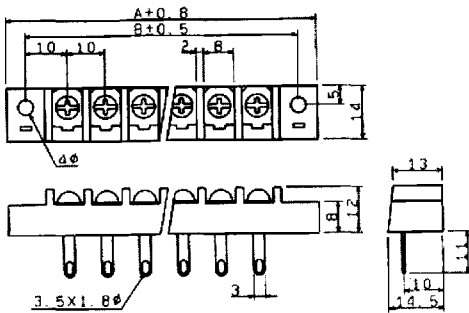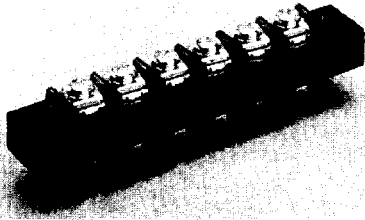



ASH-10-E

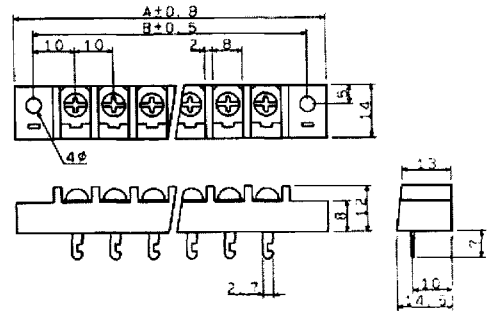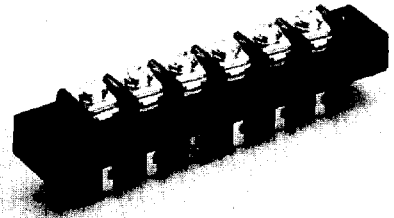

ASH-10-F

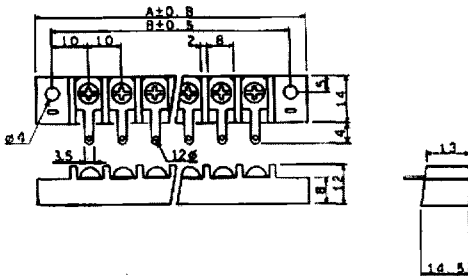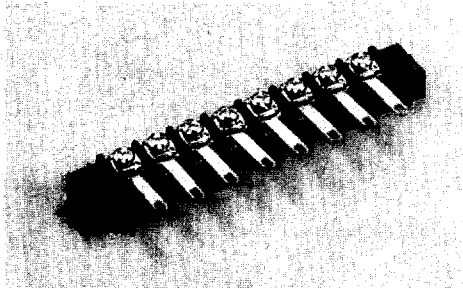

ASH-10-G

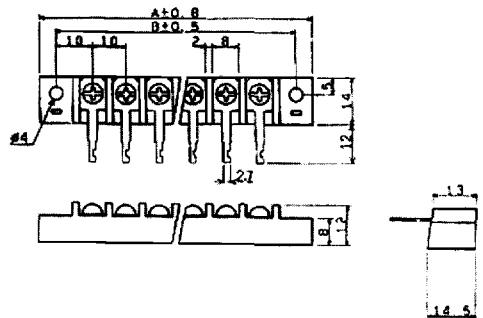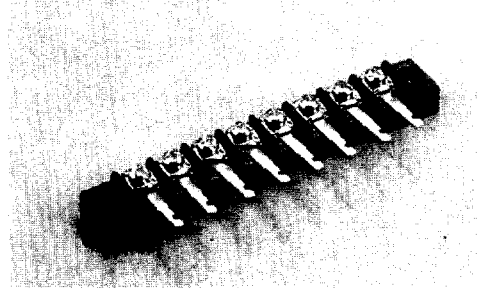

DIMENSION: ±0.8mm

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
A	38	48	58	68	78	88	98	108	118	128	138	148	158	168	178	188	198	208	218	228	238	248	258	268	278
B	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200	210	220	230	240	250	260	270