



SMK MINI JACK · POWER JACK PHONE JACK


LGK 2009-0201




LGK 1503-0301




LGK 2513-1101




LGA 2519-3101




LGY 3509-0200



LGY 2502-0200



DC POWER JACK/PLUG

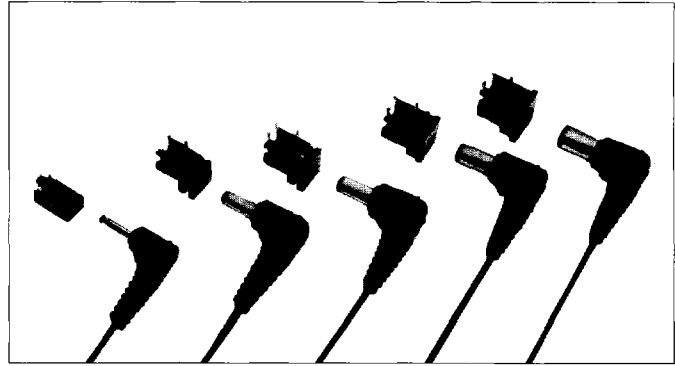

特長

- EIAJ規格RC-5320Aに準拠してレパートリーをそろえ、用途に応じて使い分けができます。

Specifications

- Contact Resistance: 30mΩ max.
- Insulation Resistance: 100MΩ min. at 500V DC
- Polarity: Polarity on outside of Plug is negative (-), center is positive (+).

Products Variation

Rating Voltage	Plug Harness	Drawing Number		
		Through Hole	Jack SMD	Lead Wiring
DC 3.15V max.	LLP0140-□□00	LGP2231-0100	—	—
		LGP6501-0100 LGP1331-0200	LGP3131-0110	—
DC 6.3V max.	LLP0141-□□00	LGP6531-0600	—	—
		LGP3331-0100 LGP1331-0100	LGP3131-0200	—
DC 10.5V max.	LLP0142-□□00	LGP6531-0400	—	—
		LGP3831-0200 LGP6531-0700	LGP3831-0100	LGP0038-0100
DC 13.5V max.	LLP0143-□□00	LGP6531-0800	—	—
		LGP7031-0100	—	—
DC 18.0V max.	LLP0170-□□00	LGP7031-0100	—	—





LGY 6501/6502-0600

LGY 6501/6502-0600

LGY 6502-0800



(シールドタイプ)



LGS 6507-0800

LGT 1516-0100

LGR 6507-0700

LGR 4609-7000

