


Part No.	Type	Nominal diameter	Withdraw. force	Rated current	Contact resistance
24.0115	A 2/4	4 mm	—	25 A	0.6 mΩ

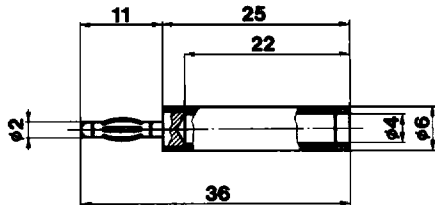


Universal adapter, 2 mm (.080 in) dia. Multilam™ plug on one end and 4 mm (.160 in) dia. in-line socket on the other end. Machined brass, gold plated and polyamide insulated. Used with standard or safety plugs.

Operating temperature: -40°C to +80°C
(-40°F to 176°F)

Colors: 1, 2, 4, 5

1:1

23.5065 B4-I/K

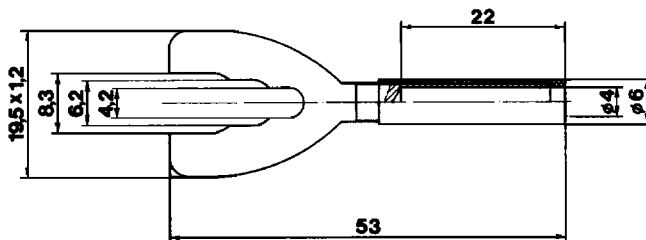


Universal adapter, 4 mm (.160 in) dia. suitable for 4 mm (.160 in) dia. plugs. Made of brass, gold plated and polyamide insulated. Terminal can be connected to threaded clamps with bolt diameters of 4, 6 and 8 mm (.160, .236 and .315 in).

Operating temperature: -40°C to +80°C
(-40°F to 176°F)

Colors: 1, 2, 4, 5

1:1

23.0440 B 4-I/KA

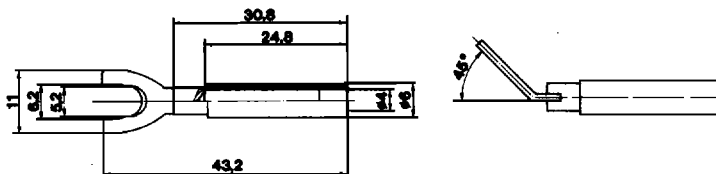

Adapter suitable for screw terminals with screw diameter up to 6 mm (.236 in) dia. Socket fits any commercial spring-loaded 4 mm (.160 in) dia. plug. Made of brass, gold plated with polyamide insulation.

Operating temperature: -40°C to +80°C
(-40°F to 176°F)

Colors: 1, 2, 4, 5

1:1.3

Nominal diameter **Withdraw. force** **Rated current** **Contact resistance**

Type

Part No.

Adapter suitable for screw terminals with screw diameter up to 3.6 mm (.141 in) dia. Socket fits any commercial spring-loaded 4 mm (.160 in) dia. plug. Made of brass, nickel plated with PA (polyamide) insulation.


Operating temperature: -40°C to +80°C
 (-40°F to 176°F)

Colors: 1, 2, 4, 5



B 4-I/KS

23.0480

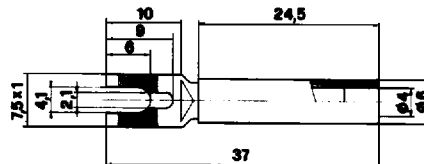

1:1

2 mm - 19 A -
 4 mm - 32 A

Universal coupler KK 2/4 with 2 mm (.080 in) dia. socket on one end 4 mm (.160 in) dia. socket on other end and KK 4/4 with 4 mm (.160 in) dia. sockets on both ends.

Ratings for KK 2/4:

- Test voltage: 500 V
- Operating temperature: -10°C to +80°C
 (14°F to 176°F)

Ratings for KK 4/4:


- Rated voltage: 1000 V
 (valid only when connected to MC safety plugs.)
- Insulation coordination: 6000 V/2
- Test voltage: 3250 V
- Operating temperature: -10°C to +80°C
 (14°F to 176°F)

Colors: 1, 2, 4, 5




KK 2/4
KK 4/4

24.0141

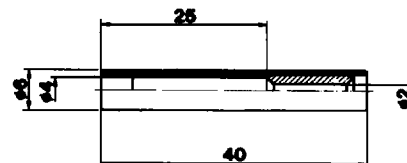

24.0142



1:2

- 0 - green/yellow 1 - red 2 - blue 3 - white 4 - black 5 - yellow 6 - green 7 - brown 8 - gray 9 - violet