
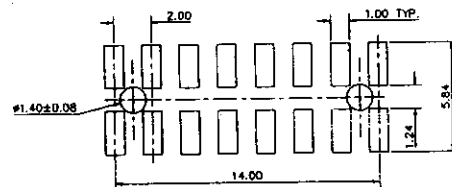
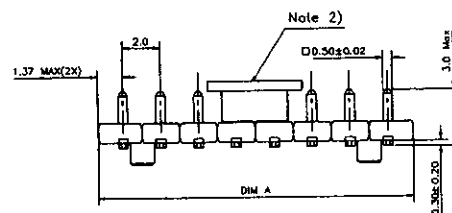


Tous droits strictement réservés. Reproduction ou communication à des tiers ont
 propriété de C BERG ELECTRONICS.
 Droits de reproduction BERG ELECTRONICS by

BERG
 ELECTRONICS

All rights strictly reserved. Reproduction or communication to any other
 property of C BERG ELECTRONICS.
 Copyright BERG ELECTRONICS by

EVEN PIECE



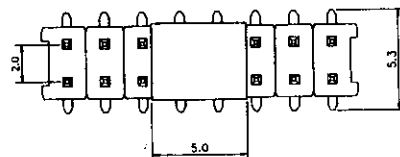


PCB FOOT PRINT

TABLE 1

Number of positions	Dimensions	Qty / Package
	A (MAX)	Carrier tape
04	4.75	1800
08	8.75	1800
10	10.75	(Note 3)
14	14.75	(Note 3)
16	16.75	(Note 3)

ODD PIECE



Specification:

- 1) Material:
 - Housing: PPS Color: Black
 - Suction Pad: PPS Color: Black
 - Pin: Phosphor Bronze
- 2) Electrical:
 - Rated Voltage: 200V AC
 - Current Rating: 2A
 - Contact Resistance: 25 mΩ
 - Insulation Resistance: 1000 MΩ Min. between adjacent contact at 500V DC.
 - Withstanding Voltage: 650V AC between adjacent terminals for 1 minute Min.
- 3) Mechanical:
 - Contact Retention: 500g Min before and after subject to a temperature of 235°C for 1 minute.
- 4) Environmental:
 - Operating Temperature Range: -40°C to +105°C

NOTE:

- 1) Ordering Data:
 - 61714 - X X X 0 X X
 - Pos. (see table 1)
 - 0: With Pick Pad
 - 1: Without Pick Pad
 - Packaging type
 - 1: Tape & Reel
 - 2: PVC Tube
 - Plating:
 - 0: Gold Flash
 - 1: 10u" Gold
 - 3: 30u" Gold
 - 5: Pd Ni 30u"

- (2) Removable vacuum suction pad location is located at center of header.
- (3) Tape and reel package will be available upon request.

mat'l code				tolerance unless otherwise specified		CUSTOMER COPY		BERG ELECTRONICS	
rev.	ecn	no.	dr	date	linear	0.0	±0.38	projection	title
A	T65077	A.CH	11/7/96		0.02	±0.05			SMT HEADER
					0.000	±0.012			LOW PROFILE, 2.0mm PITCH
					angles	±3			
					dr	ANDY CHAU	11/7/96	unit	product family
					engr	ANDY CHAU	11/7/96	mm/inch	code
					chr	C. L. CHEN	11/8/96	size	dwg no.
					appd	C. L. CHEN	11/8/96	scale	A3
								5:1	61714
sheet	revision								1 of 1
index	sheet								