







PRODUCT NO.
SEE TABLE



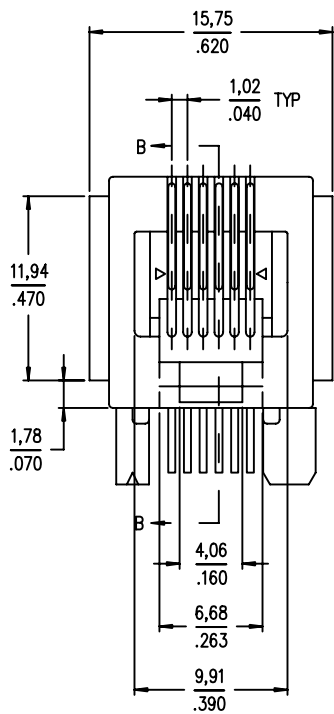

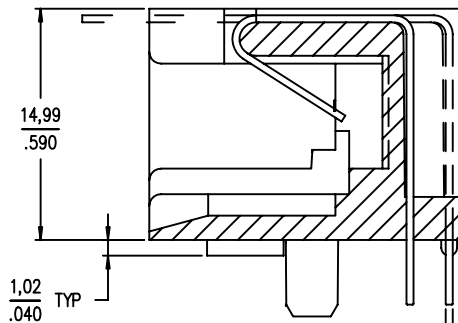




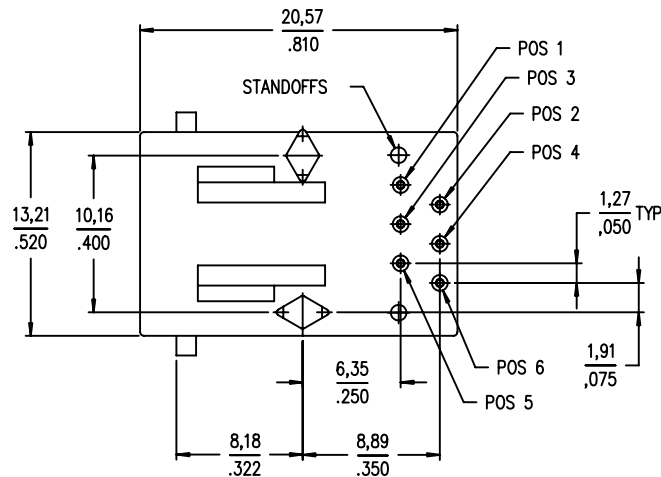
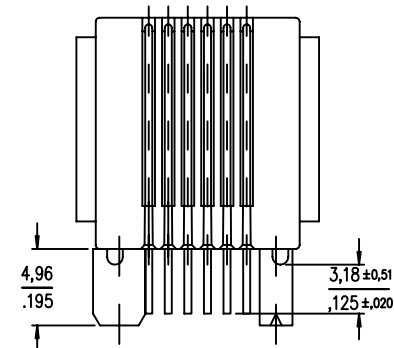




A ——— A





SECTION B-B



mat'l code				tolerance unless otherwise specified			CUSTOMER COPY		 www.fciconnect.com					
rev.	ecn no.	dr	date	linear	X.X ±0.3 / X.XX ±0.01		projection		title	6 POS HORIZONTAL P.C.B. MOD JACK ASSY				
M	S80281	BC L	05/09/98		X.XX ±0.13 / X.XXX ±0.005									
N	V81245	BOB M	12/18/98		X.XXX ±0.009 / X.XXXXX ±0.00020									
P	S90087	BC L	05/19/99	angles	± 2°			mm/inch	product family	code				
R	S00022	BC L	01/26/00	dr	JANET	01/26/00					scale	A3	68898	sheet 1 OF 2
S	N05-0002	YS	01/07/05	enr	TONY CHIEN	01/26/00								
T	N06-0130	LONG	5/15/06	chr	TONY CHIEN	01/26/00								
U	N08-0097	SH	5/10/08	appd	JENN TSAO	01/26/00	1/1							
sheet	revision	T	T											
index	sheet	1	2											

PRODUCT NO. (NOTE 1)	POSITIONS LOADED	CONTACT PLATING	HOUSING COLOR	MOUNTING EARS	REMARKS
68898-001/-001LF	ALL	GXT  TM	BLACK	YES	-
68898-001R/-001RLF	ALL	GXT  TM	RED	YES	-
68898-001G/-001GLF	ALL	GXT  TM	GREEN	YES	-
-002/-002LF	2,3,4,5	GXT  TM	BLACK	YES	-
-003/-003LF	3,4	0,76um /30u" Au	BLACK	YES	-
-004/-004LF	2,3,4,5	0,76um /30u" Au	BLACK	YES	-
-005/-005LF	ALL	0,76um /30u" Au	BLACK	YES	-
-006/-006LF	3,4	GXT  TM	BLACK	YES	-
-007	2,3,4,5	GXT  TM	GRAY	YES	OBSOLETED
-008/-008LF	ALL	0,76um /30u" Au	BLACK	NO	-
-009/-009LF	2,3,4,5	1,27um /50u" Au	BLACK	YES	-
-010/-010LF	ALL	1,27um /50u" Au	BLACK	YES	-
-011/-011LF	2,3,4,5	2u" Au	BLACK	YES	-
-012/-012LF	2,3,4,5	6u" Au	BLACK	YES	-
-013/-013LF	ALL	GXT  TM	BLACK	YES	HI TEMP MATERIAL
-014/-014LF	3,4	6u" Au	BLACK	YES	-
-015/-015LF	3,4	GXT  TM	BLACK	NO	-
-016/-016LF	2,3,4,5	GXT  TM	BLACK	NO	-
-017LF	ALL	GXT  TM	BLACK	YES	-

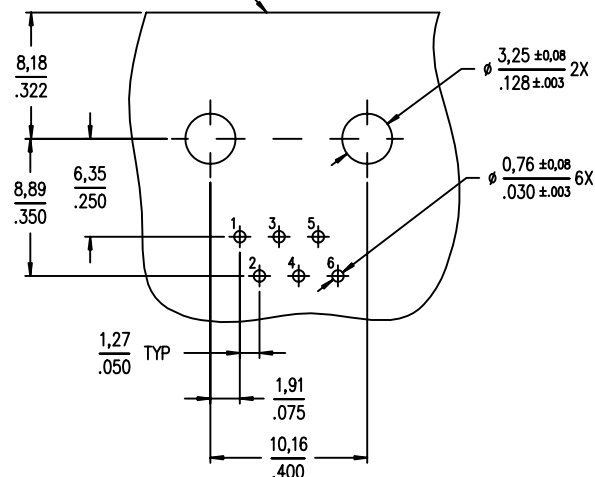

LEAD FREE PRODUCT NO.
EDGE OF BOARD
RECOMMENDED BOARD LAYOUT
VIEWED FROM TOP



VIEW A-A

NOTES :

- WHEN PRODUCT CALLS FOR PACKAGING IN TRAY ORDER THE PRODUCT WITH PART NUMBER 68898-XXXT OR -XXXTLF FOR PACKAGING IDENTIFICATION.
FOR PRODUCT NUMBER WITHOUT SUFFIX "T" OR "TLF", THE PRODUCT WILL BE PACKED IN TUBE AS PER DUPONT STANDARD PACKAGING.
- GXT IS 0,76um / 30u" MIN GXT WITH Au FLASH OVER 1,27um / 50u" MIN Ni.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- IF LF P/N PACKAGING MEETS GS-14-920 SPECIFICATION.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.60mm MINIMUM THICK CIRCUIT BOARD.
- FOR 68898-013/013LF THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
- EQUIVALENT THICKNESS Au AND GXT PLATING HAVE SAME FUNCTION AND THEY ARE ALTERNATIVE BY THE CUSTOEMR .

mat'l code					tolerance unless otherwise specified		CUSTOMER COPY				www.fciconnect.com	
rev.	ecn	no.	dr	date	linear	X/X ±0.3/X/X ±0.01	projection 	title 6 POS HORIZONTAL P.C.B. MOD JACK ASSY				
U						X/X ±0.13/X/X ±0.005						
						X/X ±0.081/X/X ±0.0020						
					angles	± 2°						
			dr	JANET	01/26/00	unit	product family		code			
			enr	TONY CHIEN	01/26/00	mm/inch			TWN			
			chr	TONY CHIEN	01/26/00	scale	size		dwg no.		sheet	
			appd	JENN TSAO	01/26/00	1/1	A3		68898		2 OF	
sheet	revision											
index	sheet											