



ASH-30 Series Pitch 11mm

Specifications



BARRIER MATERIAL: THERMOPLASTIC (UL 94V-0), BLACK
 TERMINALS: TIN PLATED BRASS
 SCREWS: NICKEL PLATED STEEL
 WIRE RANGE AWG: 14-22 STR.
 RATING: 20 AMPERES, 300 VAC
 INSULATION WITHSTANDS VOLTAGE AC 2000
 INSULATION RESISTANCE 500MΩ OR MORE AT DC 500V

MOUNTING END & BARRIER
 END ARE BOTH AVAILABLE



ASH-301

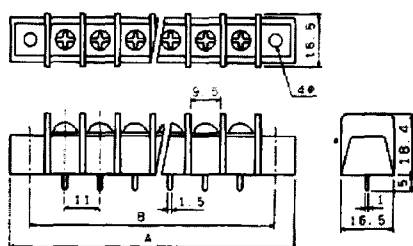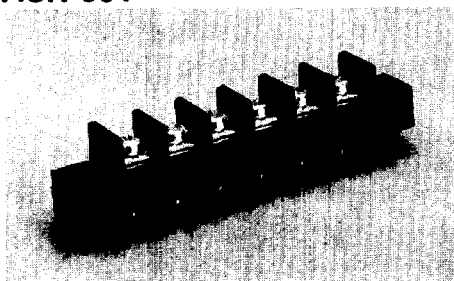



ASH-302

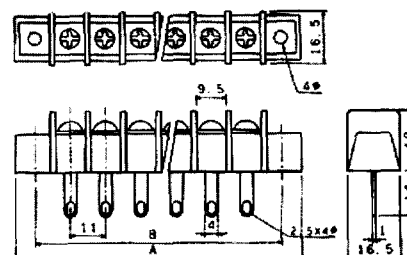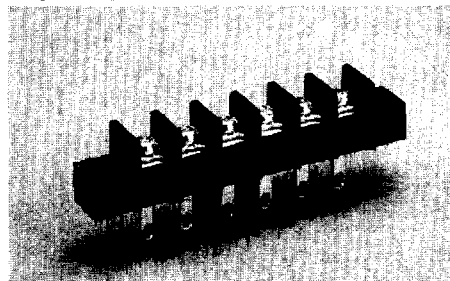

ASH-303

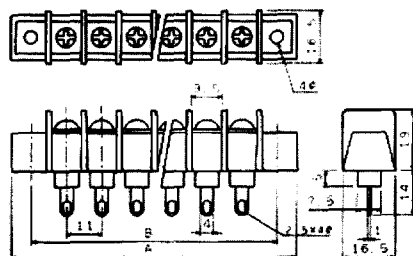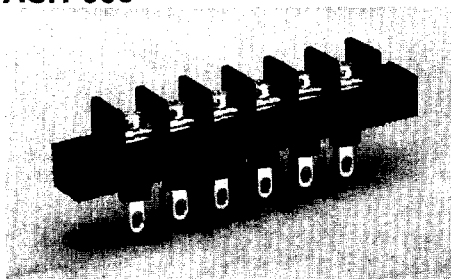

ASH-304

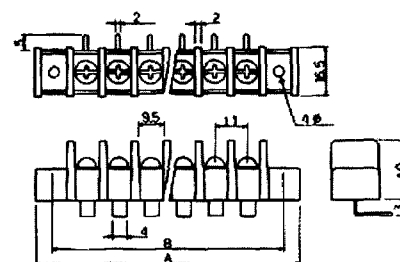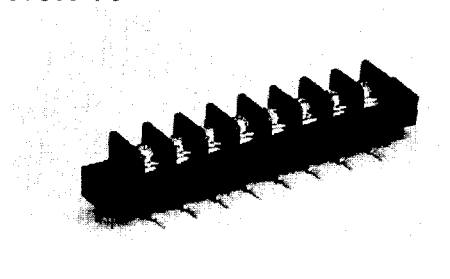

DIMENSION: $\pm 0.8\text{mm}$

Pole	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A	46	57	68	79	90	102	112	124	135	146	157	168	179	190
B	33	44	55	66	77	88	99	110	121	132	143	154	165	176

Pole	16	17	18	19	20	21	22	23	24	25	26	27	28
A	201	212	223	234	246	257	268	279	290	301	312	323	334
B	187	198	209	220	231	242	253	264	275	286	297	308	319