


# Attenuators

## SMA Miniature Type

### C - 18 GHz High Performance

- DC-2, DC-4, DC-8, and DC-12.4 units available
- 0 - 60 dB Attenuation Values
- Rugged Stainless Steel Construction
- Any Male/Female combination available
- Low cost alternatives available

Midwest Microwave's SMA miniature series of fixed coaxial attenuators provide temperature stable, ruggedly built, precision performance in a small light weight package size. Attenuation values up through 60 dB in 1 dB increments are available with any of the units described and with any combination of female or male SMA connectors.

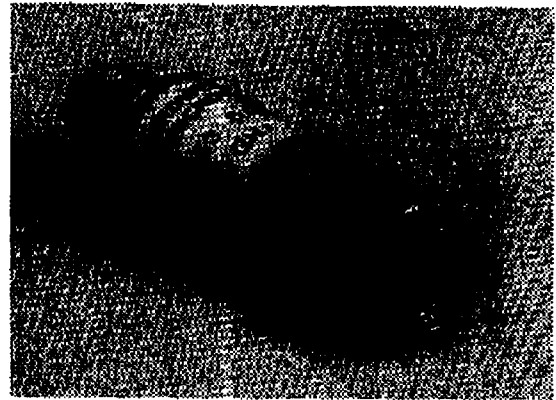

### SPECIFICATIONS - HIGH PERFORMANCE

Frequency: DC - 18.0, DC - 12.4, DC - 8.0 GHz  
DC - 4.0, DC - 2.0 GHz

Attenuation Accuracy: 1-10 dB ± 0.3 dB  
11-20 dB ± 0.5 dB  
21-40 dB ± 1.0 dB  
41-60 dB ± 1.5 dB

VSWR: 1.07+.015 (f GHz) max.

Power: 2 Watts Average @ 25C derated linearly to .5 Watts @ 125C

Peak Power: 200 Watts


Operating Temperature Range: - 65 to + 125C

Finish: Passivated Stainless Steel


DC - 18 GHz		263 Series	Model Numbers
Male/Female	Female/Female	Male/Male	
ATT-0263-XX-SMA-02	ATT-263F-XX-SMA-02	ATT-263M-XX-SMA-02	
XX = Attenuation Value: Select 01-60dB in 1dB increments (.5 dB increments available)			
<b>HIGH PERFORMANCE</b>			

DC - 12.4 GHz		205 Series	Model Numbers
Male/Female	Female/Female	Male/Male	
ATT-0205-XX-SMA-02	ATT-205F-XX-SMA-02	ATT-205M-XX-SMA-02	
XX = Attenuation Value: Select 01-60dB in 1dB increments (.5 dB increments available)			
<b>HIGH PERFORMANCE</b>			


DC - 8.0 GHz		206 Series	Model Numbers
Male/Female	Female/Female	Male/Male	
ATT-0206-XX-SMA-02	ATT-206F-XX-SMA-02	ATT-206M-XX-SMA-02	
XX = Attenuation Value: Select 01-60dB in 1dB increments (.5 dB increments available)			
<b>HIGH PERFORMANCE</b>			



Attenuation Value	Length A
1-20 dB	1.20
21-60 dB	1.49



Attenuation Value	Length A
1-20 dB	1.07
21-60 dB	1.36



Attenuation Value	Length A
1-20 dB	1.33
21-60 dB	1.62

Note: \* U.S. Patent No. 3,824,506 applies to all \* Fixed Attenuators.

