
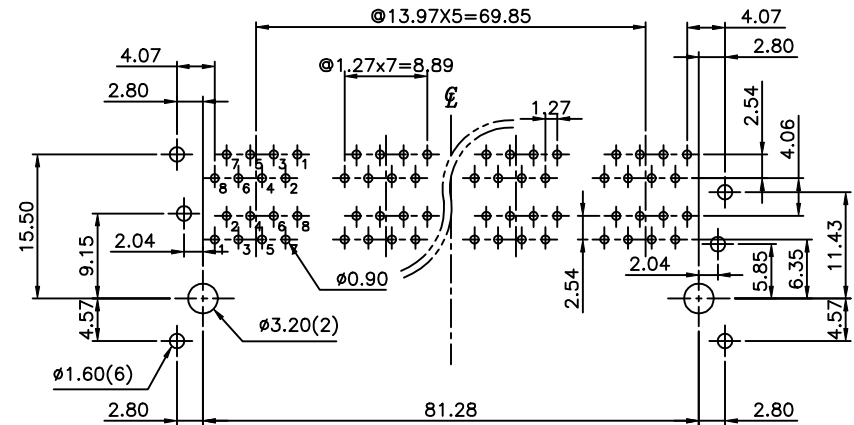
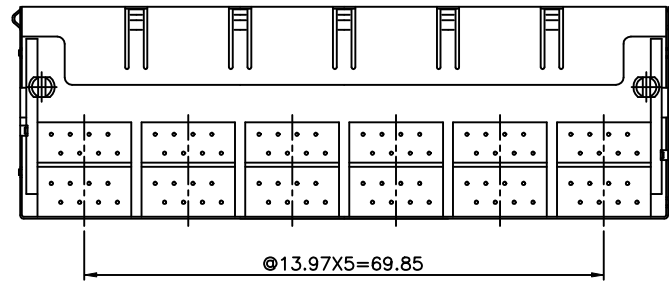
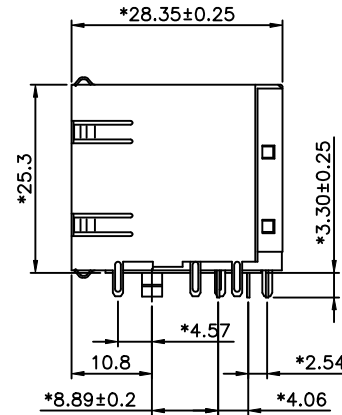


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		ADD PART NO.	Syngs 8/06/2003	
△		MODIFY DRAWING	QUILER 07/27/05	

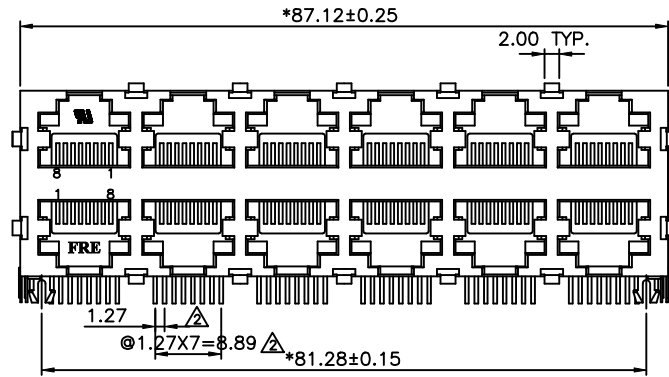

PC Board Layout
Component Side Shown

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: 0°C TO 70°C.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

PART NUMBER: E5908-5XE12X

Shield Plating: Gold Thickness:
 1- Tin 1- 3u" 2- 6u" 3-15u"
 7- Nickel 4-30u" 5-50u"
 △Q- GOLD

△ LEAD FREE PART NUMBER: E5908-57E13X-L

FR52 BK Gold Thickness:
 1- 3u" 2- 6u" 3-15u"
 4-30u" 5-50u"

DETACHED LISTS	← MM (INCH) →		DFTO YUAN	DATE 10/19/00'	FULL RISE ELECTRONIC CO., LTD
	TOLERANCES EXCEPT AS NOTED		CHKD QIANFU	DATE 2005/1/28	
			MFO	DATE	
			APPV LUSHENG	DATE 2005/1/29	
		MATERIAL :	TITLE RJ45 STACKED GANGED JACK, 2X6		
		ANGLES ± 0.5	QT'Y :	DRAWING NO. GE593A87	
		THIRD ANGLE PROJECTION	FINISH :	/PART NO. SEE NOTE	
			SCALE : 1.5 : 1	DO NOT SCALE DRAWING	
				SHEET OF	