Product Specifications



F2A-PDFDR-5M-3GSH

FSJ2P-50 SureFlex™ Jumper with interface types 7-16 DIN Female and 7-16 DIN Male Right Angle, 5 m



CHARACTERISTICS

General Specifications

Body Style, Connector A Straight
Body Style, Connector B Right angle
Cable Family FSJ2-50


Interface, Connector A 7-16 DIN Female
Interface, Connector B 7-16 DIN Male

Length 5.000 m | 16.404 ft

Electrical Specifications

3rd Order IMD -110.00 dBm DTF, Connector A -32.00 dB DTF, Connector B -32.00 dB

Jumper Assembly Sample Label

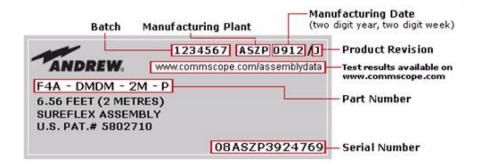

Return Loss/VSWR

 Frequency Band
 VSWR
 Return Loss (dB)

 698-960 MHz
 1.10
 26.40

 1700-2200 MHz
 1.10
 26.40

Regulatory Compliance/Certifications

Agency Classification

www.commscope.com/andrew

page 1 of 2 6/9/2011

Product Specifications



F2A-PDFDR-5M-3GSH

RoHS 2002/95/EC China RoHS SJ/T 11364-2006 ISO 9001:2008

Compliant by Exemption Above Maximum Concentration Value (MCV) Designed, manufactured and/or distributed under this quality management system



