


TWO NUTS RECEPTACLE

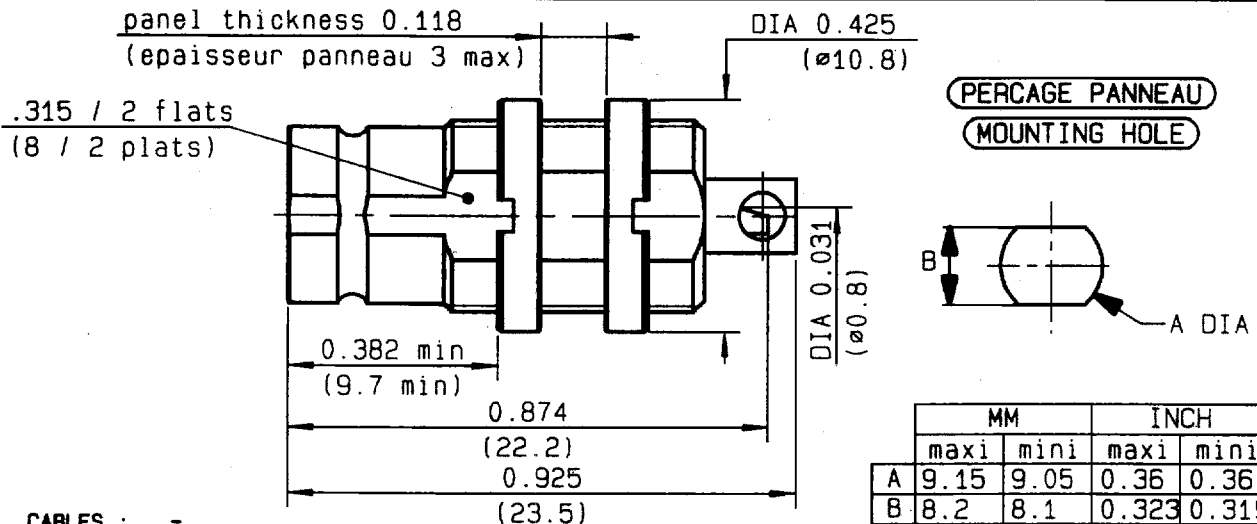

CABLES : -

CHARACTERISTICS

NOMINAL IMPEDANCE	75 Ω
FREQUENCY RANGE	0-1 GHz
TEMPERATURE RATING	-40/+155 °C
VSWR	- + - x F(GHz)Maxi
RF INSERTION LOSS	- √F(GHz) dB Maxi
VOLTAGE RATING	330 Vrms Max
DIELECTRIC WITHSTANDING VOLTAGE	1500 Vrms min
INSULATION RESISTANCE	10000 MΩ min
HERMETIC SEAL	- cc/s - Atm.cm3/s
LEAKAGE (pressurized only)	- psi - MPa
WEIGHT	0 Oz 5.8 g

STANDARDISATION

CABLE RETENTION	0	lb min
CENTER CONTACT RETENTION		
Axial force - mating end	6.74	lb min
	30	N
Axial force - opposite end	6.74	lb min
	30	N
Torque (Min)	0	Inch.oz
		cm.N
RECOMMENDED TORQUES		
Mating	0	Inch.lb
		cm.N
Panel nut	0	Inch.lb
		cm.N
Clamp nut	0	Inch.lb
		cm.N

CONSTRUCTION

CONNECTOR PARTS	MATERIALS	FINISH
BODY	BRASS	GOLD OVER NICKEL
OUTER CONTACT	-	-
CENTER CONTACT	BERYLLIUM COPPER	GOLD OVER NICKEL
INSULATOR	PTFE	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-



ISSUE	REVISION No	DESCRIPTION	BY	DATE
-	-	-	-	-
-	-	-	-	-
C	98-07-009	Updated VPL	TRIPPIER	21-10-98

Initiated on 17/09/85
Approval by VIGNARD

The information given here is subject to change without notice. Design changes may be in order to improve the product.

