

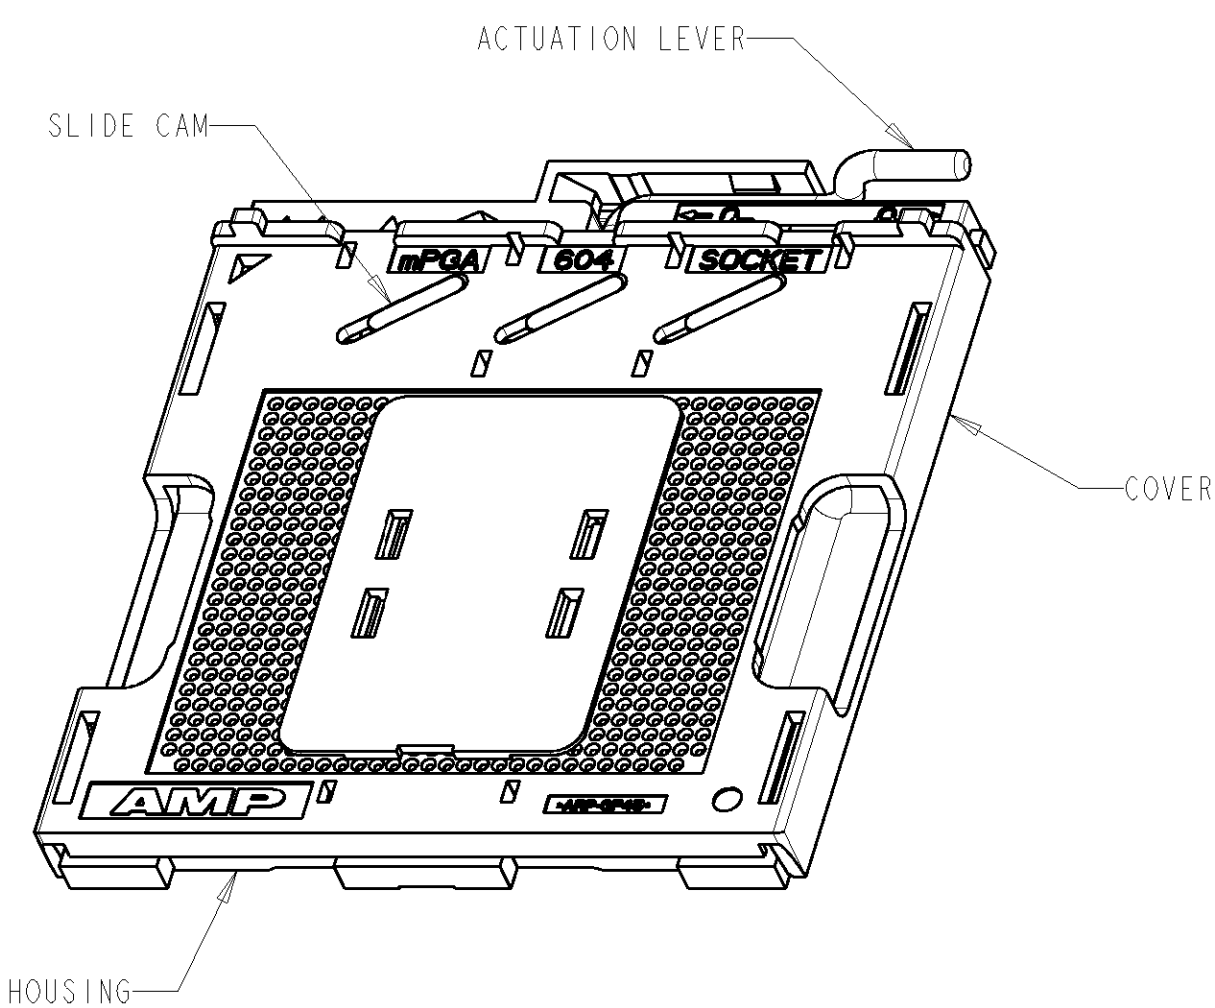
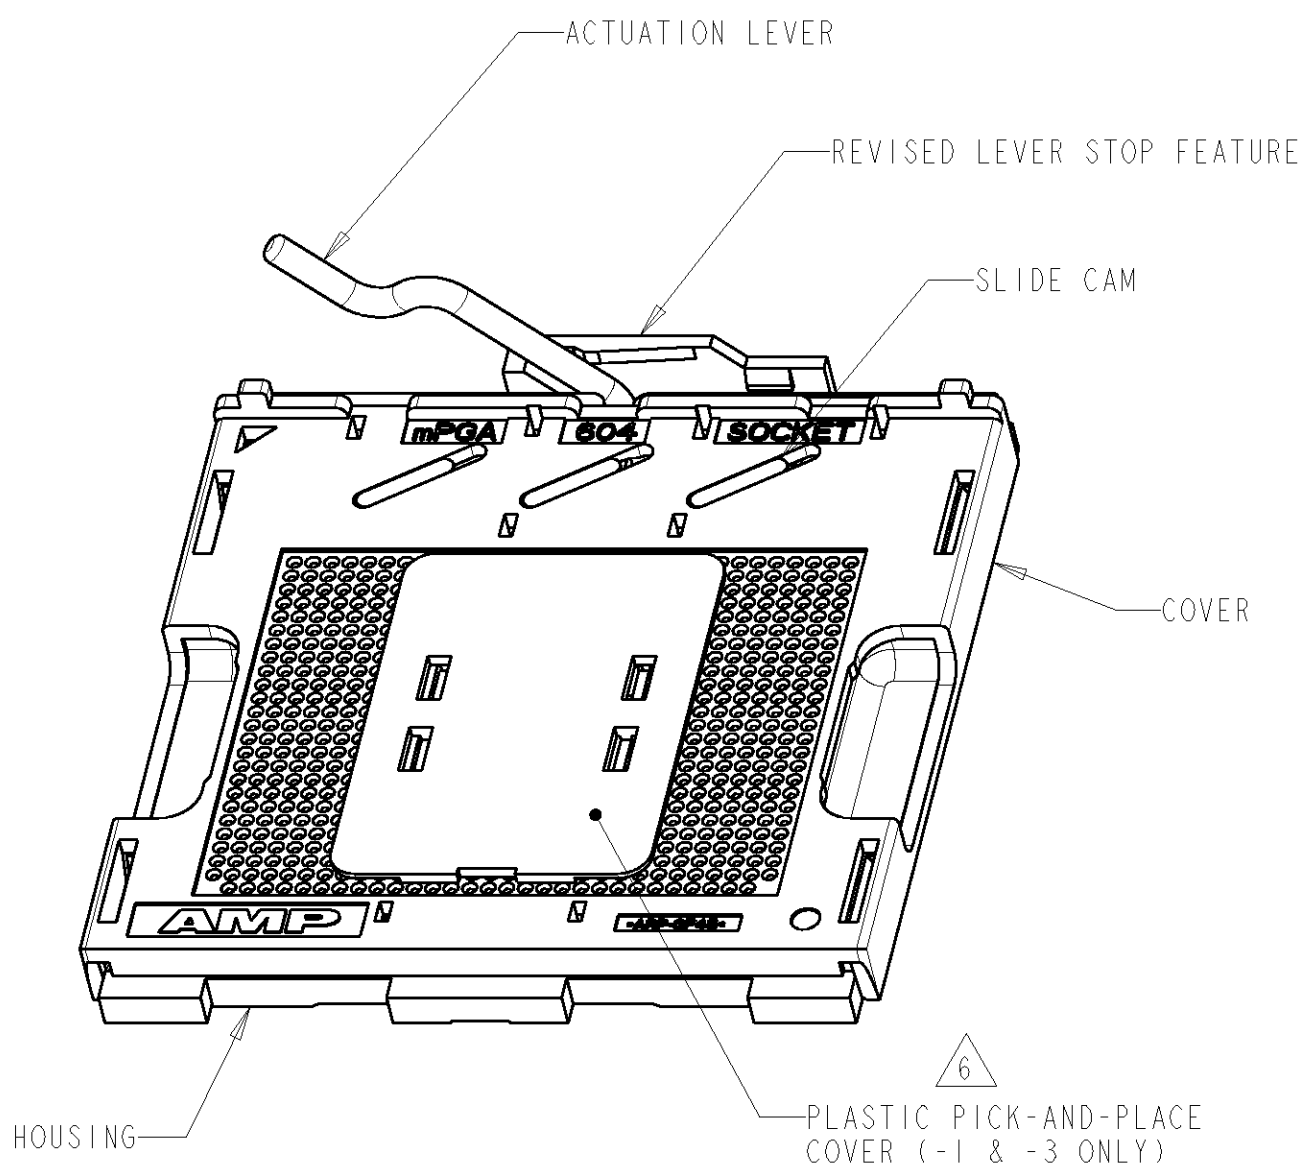
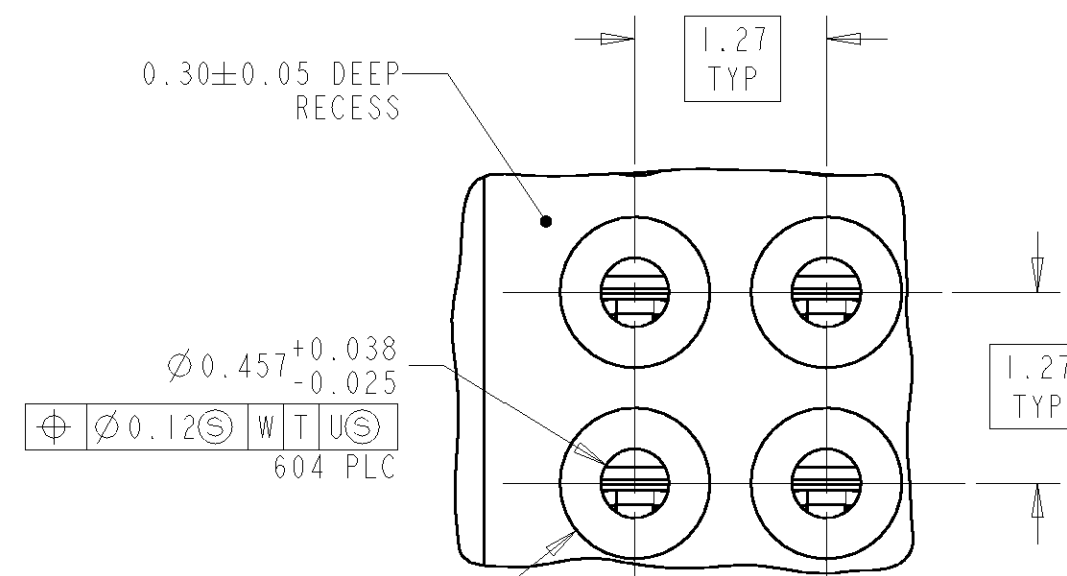
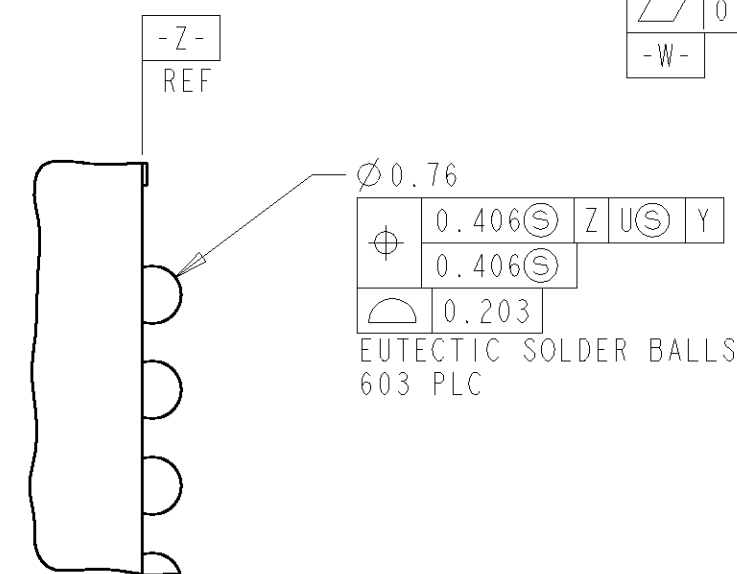


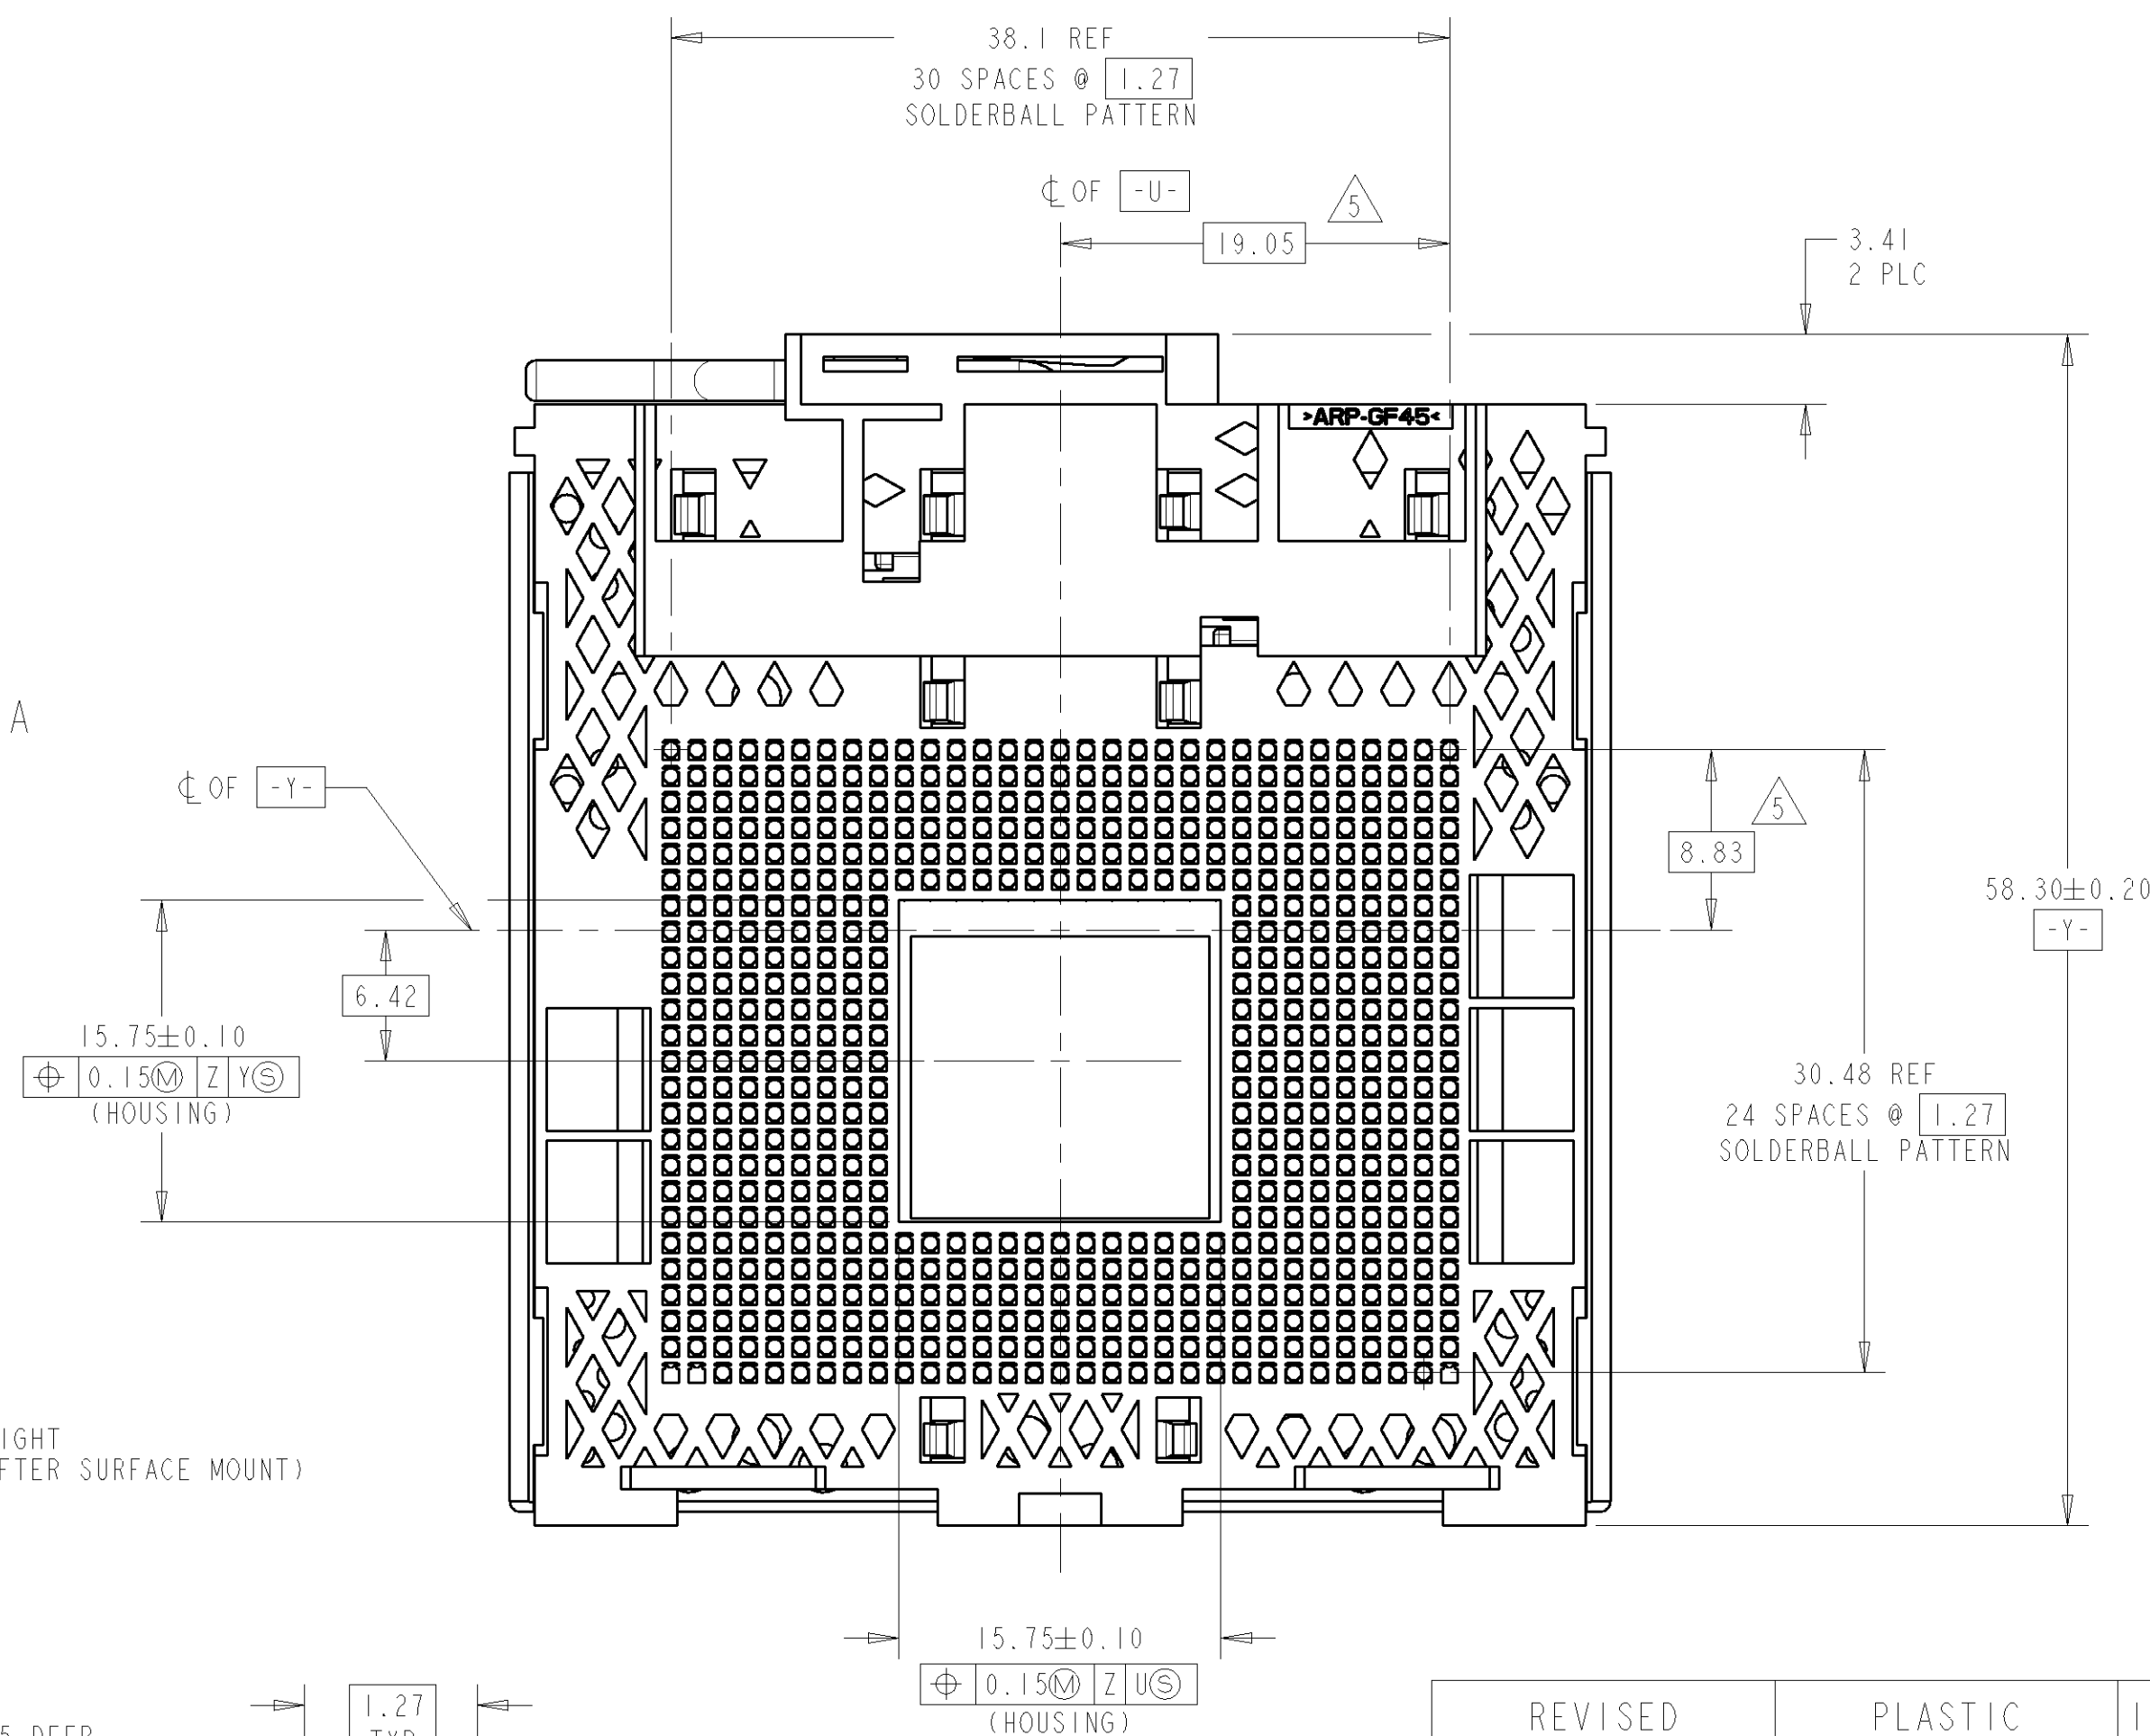


1489688-3 ASSEMBLY SHOWN
WITH PLASTIC PICK-AND-PLACE COVER
SHOWN IN OPEN (UNLOCKED) POSITION
SCALE 2:1

1489688-1 & -2 ASSEMBLY SHOWN
SHOWN IN CLOSED (LOCKED) POSITION
SCALE 2:1

- 1 MATERIAL:
HOUSING - HIGH TEMPERATURE THERMOPLASTIC, UL94V-0, BLACK
COVER - HIGH TEMPERATURE THERMOPLASTIC, UL94V-0, NATURAL
SLIDE CAM - HIGH TEMPERATURE THERMOPLASTIC, UL94V-0, BLACK
CONTACT - COPPER ALLOY
ACTUATION LEVER - STAINLESS STEEL
TAPE PICK-AND-PLACE COVER - POLYIMIDE FILM
PLASTIC PICK-AND-PLACE COVER - HIGH TEMPERATURE THERMOPLASTIC,
UL 94V-0, BLACK.
- 2 FINISH:
CONTACT: 0.76µm MIN GOLD IN CONTACT AREA, OVER 1.27µm MIN NICKEL
ALL OVER.
3. INSTRUCTION SHEET 408-8601. QUALIFICATION SPECIFICATION 501-533.
- 4 ACTUATION DIRECTION - COVER TRAVELS 0.48±0.15 WITH MATED INTERPOSER.
- 5 THIS DIMENSION FOR PIN #1 SOLDERBALL.
- 6 PLASTIC COVER (-1 & -3) OR POLYIMIDE TAPE COVER (-2 & -4) PROVIDED FOR
PICK-AND-PLACE EQUIPMENT - REMOVE COVER BEFORE INSTALLING PROCESSOR.
- 7 APPROXIMATE CENTER OF GRAVITY OF SOCKET ASSEMBLY.
- 8 DATE CODE WITH OPTIONAL IDENTIFIERS, LOCATED APPROXIMATELY AS SHOWN.
9. PACKAGED IN HARD JEDEC TRAY.
- 10 5.31 REF DIMENSION FOR 1489688-1 AND -2.
- 11 PACKAGED ON TAPE & REEL PER EIA 481 SPECIFICATION, 88MM WIDE TAPE,
64MM POCKET PITCH, CORRUGATED REEL DIAMETER 556MM, 120 PCS/REEL.

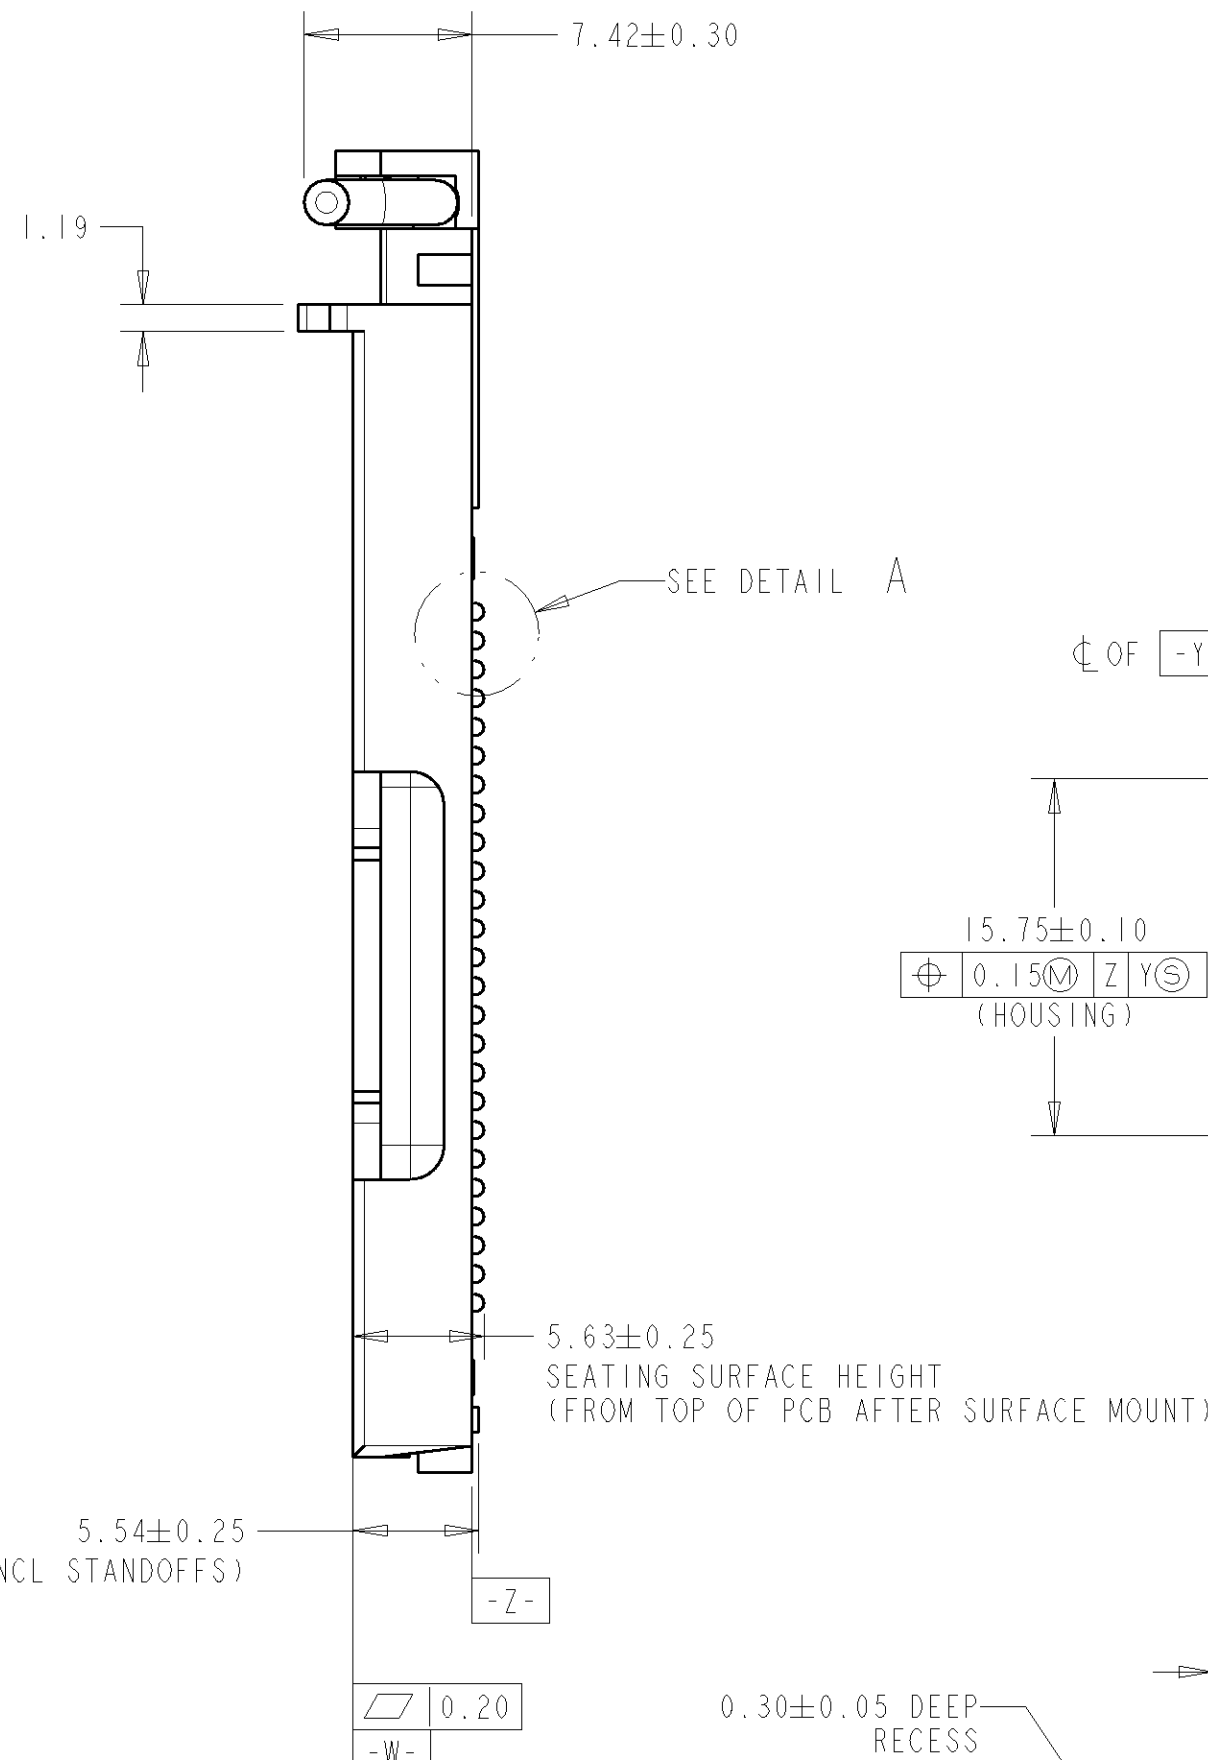

0.15M Z UCS (HOUSING)	REVISED	PLASTIC	1489688-5
	REVISED	TAPE	1489688-4
	REVISED	PLASTIC	1489688-3
SUPERSEDED BY 1489688-4	STANDARD	TAPE	1489688-2
SUPERSEDED BY 1489688-3	STANDARD	PLASTIC	1489688-1
	LEVER STOP FEATURE	PICK-AND-PLACE COVER	PART NUMBER

THIS DRAWING IS THE PROPERTY OF AMP INC. IT IS TO BE USED FOR THE MANUFACTURE OF AMP PRODUCTS ONLY. IT IS NOT TO BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF AMP INC. IT IS TO BE DESTROYED WHEN NO LONGER REQUIRED FOR THE LATEST REVISION.		DWN GRZYBOWSKI 23AUG01 CHK D. TROUT 19SEP01 APP'D B. WHYNE 19SEP01		 Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.1 1 PLC ±.3 2 PLC ±.03 3 PLC ±.1 4 PLC ±.2 ANGLES ±1° 0'		NAME SOCKET, MICRO PGA, 604 POSITION CENTER LEVER ACTUATED ZIF, FCPGA SURFACE MOUNT SOLDER BALLS	
		PRODUCT SPEC 108-1946 APPLICATION SPEC 114-13026		SIZE CAGE CODE DRAWING NO A 00779 C 1489688	
MATERIAL  		FINISH		RESTRICTED TO CUSTOMER DRAWING SCALE 2:1 SHEET 1 OF 1 REV E	