

Part No.	Type	Nominal diameter	Withdraw. force	Rated current	Contact resistance
----------	------	------------------	-----------------	---------------	--------------------


21.1700 (7.5 cm)	LK 205-L	2 mm	-	10 A	0.6 mΩ
---------------------	----------	------	---	------	--------

21.1710
(15 cm)

21.1720
(30 cm)

21.1730
(45 cm)

21.1740
(60 cm)

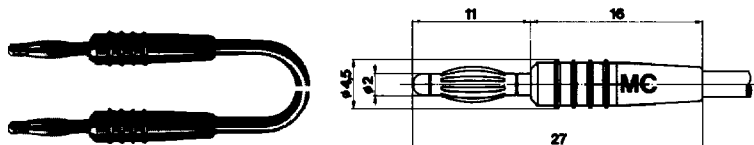

Highly flexible patch cord with 2 mm (.080 in) dia. MC®-Multilam™ plugs. Plugs machined brass, with solder cup, gold plated with MC®-Multilam™. PVC insulated wire 0.5 mm² (20 AWG).

Components and ratings:

- Pin LS 205-L # 22.1009
- Insulator (polyamide) KT 2-S # 22.2010
- Wire HK 0.5 PVC # 22.0010
- Operating temperature: -10°C to +70°C (14°F to 158°F)

1.5:1

LS 205-L

KT 2-S



1.5:1

Colors: 0 - 9


21.5860 21.5910 (Sil) (7.5 cm)	LK 205-S LK 205-S Sil	2 mm	-	10 A	0.6 mΩ
--------------------------------------	--------------------------	------	---	------	--------

21.5870
21.5920 (Sil)
(15 cm)

21.5880
21.5930 (Sil)
(30 cm)

21.5890
21.5940 (Sil)
(45 cm)

21.5900
21.5950 (Sil)
(60 cm)

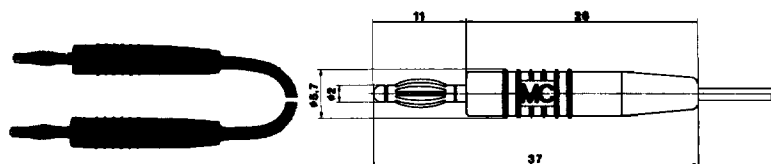

Highly flexible patch cord with 2 mm (.080 in) dia. MC®-Multilam™ plugs. Plugs machined brass, gold plated with MC®-Multilam™. PVC or silicone insulated wire 0.5 mm² (20 AWG).

For operating temperature, see page 27.


Components for LK 205-S:

- Pin LS 205-S # 22.1040
- Insulator (polyamide) KT 205-S # 22.2360
- Wire HK 0.5 PVC # 22.0010

1.2:1

LS 205-S

KT 205-S



1.2:1

Components for LK 205-S Sil:

- Pin LS 205-S # 22.1040
- Insulator (polyamide) KT 205-S # 22.2360
- Wire HK 0.5 Sil # 22.0090

Colors: • PVC: 1, 4 • Sil: 1, 4

0 - green/yellow 1 - red 2 - blue 3 - white 4 - black 5 - yellow 6 - green 7 - brown 8 - gray 9 - violet