





RL-2260

ALL IN ONE™ POWER TRANSFORMERS



This series is manufactured to meet UL, CSA, VDE and IEC specifications. Low interwinding capacitance and the shrouded design eliminates the need for electrostatic shielding. For ease of use, they are supplied with mounting brackets and quick connector solder terminals. Hi-Pot 4000 VRMS 60 Hz 2 sec winding to winding, windings to core.

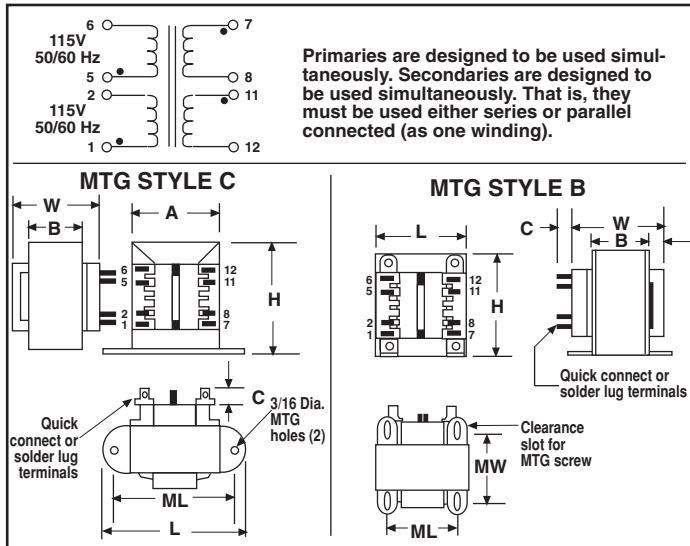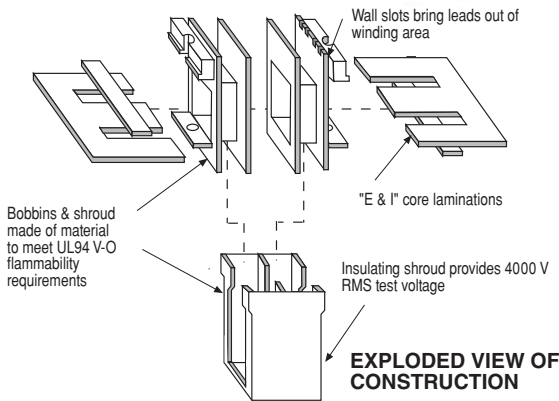

Part No.	VA (Size)	Secondary RMS Rating	
		Series	Parallel
RL-2260-25-10	25	10V C.T. @ 2.5A	5V @ 5.0A
RL-2260-43-10	43	10V C.T. @ 4.3A	5V @ 8.6A
RL-2260-80-10	80	10V C.T. @ 8.0A	5V @ 16.0A
RL-2260-130-10	130	10V C.T. @ 13.0A	5V @ 26.0A
RL-2260-175-10	175	10V C.T. @ 17.5A	5V @ 35.0A
RL-2260-25-12	25	12.6V C.T. @ 2.0A	6.3V @ 4.0A
RL-2260-43-12	43	12.6V C.T. @ 3.4A	6.3V @ 6.8A
RL-2260-80-12	80	12.6V C.T. @ 6.3A	6.3V @ 12.6A
RL-2260-130-12	130	12.6V C.T. @ 10.3A	6.3V @ 20.6A
RL-2260-175-12	175	12.6V C.T. @ 14.0A	6.3V @ 28.0A
RL-2260-25-16	25	16V C.T. @ 1.6A	8V @ 3.2A
RL-2260-43-16	43	16V C.T. @ 2.7A	8V @ 5.4A
RL-2260-80-16	80	16V C.T. @ 5.0A	8V @ 10.0A
RL-2260-130-16	130	16V C.T. @ 8.1A	8V @ 18.2A
RL-2260-175-16	175	16V C.T. @ 11.0A	8V @ 22.0A
RL-2260-25-20	25	20V C.T. @ 1.25A	10V @ 2.5A
RL-2260-43-20	43	20V C.T. @ 2.2A	10V @ 4.4A
RL-2260-80-20	80	20V C.T. @ 4.0A	10V @ 8.0A
RL-2260-130-20	130	20V C.T. @ 6.5A	10V @ 13.0A
RL-2260-175-20	175	20V C.T. @ 8.8A	10V @ 17.6A
RL-2260-25-24	25	24V C.T. @ 1A	12V @ 2A
RL-2260-43-24	43	24V C.T. @ 1.8A	12V @ 3.6A
RL-2260-80-24	80	24V C.T. @ 3.3A	12V @ 6.6A
RL-2260-130-24	130	24V C.T. @ 5.4A	12V @ 10.8A
RL-2260-175-24	175	24V C.T. @ 7.3A	12V @ 14.6A
RL-2260-25-28	25	28V C.T. @ 0.9A	14V @ 1.86A
RL-2260-43-28	43	28V C.T. @ 1.5A	14V @ 3.0A
RL-2260-80-28	80	28V C.T. @ 2.8A	14V @ 5.6A
RL-2260-130-28	130	28V C.T. @ 4.6A	14V @ 9.2A
RL-2260-175-28	175	28V C.T. @ 6.25A	14V @ 12.5A
RL-2260-25-36	25	36V C.T. @ 0.7A	18V @ 1.4A
RL-2260-43-36	43	36V C.T. @ 1.2A	18V @ 2.4A
RL-2260-80-36	80	36V C.T. @ 2.2A	18V @ 4.4A
RL-2260-130-36	130	36V C.T. @ 3.6A	18V @ 7.2A
RL-2260-175-36	175	36V C.T. @ 4.8A	18V @ 9.6A
RL-2260-25-230	25	230V C.T. @ 0.11A	115V @ 0.22A
RL-2260-43-230	43	230V C.T. @ 0.19A	115V @ 0.38A
RL-2260-80-230	80	230V C.T. @ 0.35A	115V @ 0.7A
RL-2260-130-230	130	230V C.T. @ 0.57A	115V @ 1.14A
RL-2260-175-230	175	230V C.T. @ 0.76A	115V @ 1.52A

VA	Dimensions (inches)						Mfg. Terminals	Style	Mfg.		Mfg. Screw	Lbs.
	L	W	H	A	B	C			ML	MW		
25	2.85	1.93	2.37	2.00	1.12	0.312	3/16 (187)	C	2.38	-	#6	1.25
43	3.23	2.06	2.75	2.25	1.12	0.312	3/16 (187)	C	2.78	-	#6	1.6
80	2.50	2.38	3.00	-	1.38	0.312	3/16 (187)	B	2.00	2.19	#6	2.8
130	2.81	2.67	3.38	-	1.62	0.375	1/4 (0.25)	B	2.25	2.50	#8	4.1
175	3.12	2.87	3.75	-	1.62	0.375	1/4 (0.25)	B	2.50	2.50	#8	5.5



RENCO ELECTRONICS, INC.

595 International Place, Rockledge, FL 32955-4200 USA

(321) 637-1000 • Toll Free Engineering Hot line 800-645-5828

Fax: (321) 637-1600 Web Site: www.rencousa.com E-mail: sales@rencousa.com